

# Guidance for planning of new MRI installations



Association  
of Anaesthetists  
Great Britain & Ireland



# Guidance for planning of new MRI installations

September 2026

|                                                                      |    |
|----------------------------------------------------------------------|----|
| Definitions .....                                                    | 4  |
| Abbreviations .....                                                  | 8  |
| List of tables .....                                                 | 8  |
| List of figures .....                                                | 9  |
| 1 Introduction .....                                                 | 10 |
| 2 Project brief & feasibility (RIBA stages 0-1) .....                | 15 |
| 2.1 Introduction .....                                               | 15 |
| 2.2 Client team .....                                                | 15 |
| 2.3 General clinical requirements .....                              | 16 |
| 2.4 General space requirements .....                                 | 17 |
| 2.5 General MR system requirements .....                             | 19 |
| 2.5.1 Proximity to ferromagnetic items and electrical equipment..... | 19 |
| 2.5.2 Structural requirements & delivery/removal routes .....        | 20 |
| 2.5.3 Chillers .....                                                 | 22 |
| 2.5.4 Temperature and humidity.....                                  | 22 |
| 2.5.5 Power Supply .....                                             | 23 |
| 2.5.6 Repurposing an existing RF cage .....                          | 23 |
| 2.5.7 MRI quench pipe route .....                                    | 24 |
| 2.6 Project delivery options .....                                   | 24 |
| 2.7 Summary & checklist .....                                        | 26 |
| 3 Design (RIBA stages 2-4) .....                                     | 28 |
| 3.1 Introduction .....                                               | 28 |
| 3.2 Design team.....                                                 | 28 |
| 3.3 MR suite layout and general design .....                         | 30 |
| 3.3.1 MR Controlled Access Area.....                                 | 33 |
| 3.3.2 Fire .....                                                     | 34 |
| 3.3.3 Delivery route .....                                           | 36 |
| 3.4 Specific rooms/areas within the MR suite .....                   | 37 |
| 3.4.1 Reception and waiting area .....                               | 37 |
| 3.4.2 Pre-change preparation area.....                               | 38 |
| 3.4.3 Patient screening areas / interview room .....                 | 38 |



|        |                                                           |     |
|--------|-----------------------------------------------------------|-----|
| 3.4.4  | Patient transfer area.....                                | 39  |
| 3.4.5  | Patient changing rooms .....                              | 40  |
| 3.4.6  | Post-change sub-waiting area .....                        | 41  |
| 3.4.7  | Patient preparation area .....                            | 42  |
| 3.4.8  | MR Examination room.....                                  | 44  |
| 3.4.9  | Recovery area .....                                       | 61  |
| 3.4.10 | MR Control room.....                                      | 62  |
| 3.4.11 | MR Technical room .....                                   | 65  |
| 3.4.12 | Cleaning/storage/staff changing .....                     | 66  |
| 3.5    | Examples of an MR suite layout .....                      | 67  |
| 3.6    | Supporting plant and items external to the MR suite ..... | 76  |
| 3.6.1  | Quench pipe .....                                         | 76  |
| 3.6.2  | External physical barriers for access restriction. ....   | 80  |
| 3.6.3  | Chilled water supply .....                                | 81  |
| 3.6.4  | Air handling.....                                         | 82  |
| 3.6.5  | Electrical power supply.....                              | 85  |
| 3.6.6  | Remote monitoring and building management systems.....    | 87  |
| 3.6.7  | IT options & configuration .....                          | 87  |
| 3.7    | Summary & checklist .....                                 | 89  |
| 4      | Build (RIBA stage 5) .....                                | 94  |
| 4.1    | Introduction .....                                        | 94  |
| 4.2    | Removal of old MR system.....                             | 96  |
| 4.3    | RF cage .....                                             | 96  |
| 4.4    | Quench pipe .....                                         | 98  |
| 4.5    | Build requirements prior to MR scanner delivery .....     | 99  |
| 4.6    | Build requirements prior to ramping up MRI magnet.....    | 100 |
| 4.7    | Summary & checklist.....                                  | 102 |
| 5      | Delivery & installation (RIBA stage 5) .....              | 104 |
| 5.1    | Introduction .....                                        | 104 |
| 5.2    | MR scanner delivery.....                                  | 105 |
| 5.3    | MR scanner installation.....                              | 106 |
| 5.4    | Ancillary equipment installation .....                    | 107 |
| 5.5    | Summary & checklist.....                                  | 108 |
| 6      | Acceptance (RIBA stage 6) .....                           | 109 |
| 6.1    | Introduction .....                                        | 109 |
| 6.2    | Non-imaging acceptance test checks .....                  | 109 |
| 7      | Use (RIBA stage 7).....                                   | 112 |
| 7.1    | Introduction .....                                        | 112 |

|       |                                            |     |
|-------|--------------------------------------------|-----|
| 7.2   | Policies and procedures .....              | 112 |
| 7.3   | Preventative maintenance .....             | 112 |
| 7.3.1 | Chillers .....                             | 112 |
| 7.3.2 | MR Examination room doors .....            | 113 |
| 7.3.3 | Non-ferromagnetic fire extinguishers ..... | 114 |
| 7.3.4 | Electrical supply generator testing .....  | 114 |
| 7.3.5 | Quench pipe inspections .....              | 114 |
| 7.3.6 | Emergency ramp down unit .....             | 114 |
| 7.3.7 | Drip trays .....                           | 115 |
| 7.3.8 | Oxygen monitors .....                      | 115 |
| 7.3.9 | Cleaning and decontamination .....         | 115 |
| 7.4   | Changes within the MR suite .....          | 116 |
| 7.5   | Outside of the MR suite .....              | 116 |
| 7.6   | Adverse incident reporting .....           | 117 |
| 7.7   | Replacement/decommissioning .....          | 118 |
| 7.8   | Summary & checklist .....                  | 119 |
| 8     | Examples .....                             | 120 |
| 8.1   | Example 1 – Replacement MRI .....          | 120 |
| 8.2   | Example 2 – new MRI installation .....     | 127 |
| 9     | References .....                           | 131 |

## Definitions

| Term                                        | Definition                                                                                                                                                                                                                                                                                                                                            | Source of definition                  |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| <a href="#">B<sub>0</sub> Hazard Area</a>   | <p>The space around the MR equipment where the static magnetic field can cause harm.</p> <p>Discussion – the extent of the <a href="#">B<sub>0</sub> Hazard Area</a> is defined by the 0.9 mT isocontour.</p>                                                                                                                                         | <a href="#">IEC 60601-2-33 (2022)</a> |
| <a href="#">MR Conditional</a>              | <p>Having demonstrated safety in the <a href="#">MR Environment</a> within defined conditions.</p> <p>Discussion—Defined conditions typically include the static magnetic field, the time-varying gradient magnetic fields, and the radiofrequency fields. Additional conditions, including specific configurations of the item, may be required.</p> | <a href="#">ASTM F2503-26</a>         |
| <a href="#">MR Controlled Access Area</a>   | A locally defined area of such a size to contain the <a href="#">MR Environment</a> . Access shall be restricted and suitable signage should be displayed at all entrances.                                                                                                                                                                           | <a href="#">MHRA (2026)</a>           |
| <a href="#">MR Environment</a>              | The three-dimensional volume surrounding the MR magnet that contains both the <a href="#">Special Environment</a> (Faraday shielded volume) and the <a href="#">B<sub>0</sub> Hazard Area</a> .                                                                                                                                                       | <a href="#">IEC 60601-2-33 (2022)</a> |
| <a href="#">MR Installer</a>                | The organisation that is responsible for the installation of the MR system. This may be the MR Manufacturer, but in some cases installation may be subcontracted to separate teams or the MR system may be purchased from another supplier.                                                                                                           | This guidance                         |
| <a href="#">MR Responsible Organisation</a> | <p>The organisation that is responsible for the use and maintenance of the MR system, e.g. hospital.</p> <p>Adapted here from the more general definition of a Responsible Organisation in IEC 60601-1, “The entity accountable for the use and maintenance of a Medical Electrical Equipment or Medical Electrical System.”</p>                      | <a href="#">IEC 60601-1 (2020)</a>    |

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                        |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <a href="#">MR Responsible Person</a> | <p>An individual within the <a href="#">MR Responsible Organisation</a> who is responsible for day to day management of MR safety.</p> <p>Discussion—It is recommended that the chief executive or the general manager delegate the day-to-day management of MR safety to a specified <a href="#">MR Responsible Person</a> who might most effectively be the clinical director, head of the department, clinical scientist or lead MR radiographer of the institution where the equipment is located.</p> <p>For organisations that do not utilise the MHRA guidelines as their primary reference for MR safety, nearest equivalents to the <a href="#">MR Responsible Person</a> may be the MR Medical Director (MRMD) or an MR Safety Officer (MRSO).</p> | <a href="#">MHRA (2026)</a>            |
| <a href="#">MR Safe</a>               | <p>Posing no known hazards resulting from exposure to any <a href="#">MR Environment</a>.</p> <p>Discussion—An item composed entirely of electrically nonconductive, nonmetallic, and nonmagnetic materials may be determined to be <a href="#">MR Safe</a> by providing a scientifically based rationale rather than test data. Examples of <a href="#">MR Safe</a> items are a cotton blanket or a silicone catheter. Under certain circumstances, such items can be visible in MR images or result in an MR image artifact.</p>                                                                                                                                                                                                                           | <a href="#">ASTM F2503-26</a>          |
| <a href="#">MR Safety Expert</a>      | <p>An individual who provides scientific advice on all aspects of MR safety.</p> <p>Discussion—A general description of the role of the <a href="#">MR Safety Expert</a> is provided in the JMRI consensus publication.</p> <p>The MHRA highlight the <a href="#">MR Safety Expert</a> should be certified by a scheme that assesses both knowledge and experience. Additionally, the MHRA highlight that for clinical MR suites in the UK, the <a href="#">MR Safety Expert</a> should normally have Health and Care Professions Council (HCPC) registration</p>                                                                                                                                                                                            | <a href="#">Calamante et al (2016)</a> |



|                                     |                                                                                                                                                                                                                                                                                                                                                                  |                               |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
|                                     | or General Medical Council (GMC) specialist registration.                                                                                                                                                                                                                                                                                                        |                               |
| <a href="#">MR Unlabelled</a>       | An item with no MR safety labelling.                                                                                                                                                                                                                                                                                                                             | <a href="#">MHRA (2026)</a>   |
| <a href="#">MR Unsafe</a>           | Posing unacceptable risk within the <a href="#">MR Environment</a> .<br><br>Discussion—ISO 14971 “Medical devices—<br>Application of risk management to medical devices” includes a process for the item manufacturer to identify unacceptable risk. <a href="#">MR Unsafe</a> items include items such as a pair of ferromagnetic scissors.                     | <a href="#">ASTM F2503-26</a> |
| <a href="#">Special Environment</a> | Electromagnetic environment with electromagnetic characteristics different from those specified in this collateral standard in Table 2 through Table 9 or that requires emissions limits, immunity test levels or test methods that are different from those specified for the professional healthcare facility environment and the home healthcare environment. | <a href="#">IEC 60601-1-2</a> |

The various defined MR safety zones around an MR scanner are illustrated below in Figure 1. This also shows the four American College of Radiology (ACR) zones defined in the ACR guidelines ([ACR 2026](#)). ACR Zone IV is synonymous with the MR Examination room. Outside of Zone IV all other areas within the [MR Controlled Access Area](#) are Zone III, i.e. the [MR Controlled Access Area](#) is generally considered equivalent to the combination of ACR zones III and IV. ACR Zone II is the interface between the publicly accessible, uncontrolled ACR Zone I and the strictly controlled areas of Zones III and IV. In this example, the recent move from 0.5 mT to 0.9 mT to define the [B<sub>0</sub> Hazard Area](#) avoids the [MR Environment](#) spilling out into the areas to the immediate left and right of the MR Examination room, with potential beneficial consequences for site planning that are discussed later in this guidance.

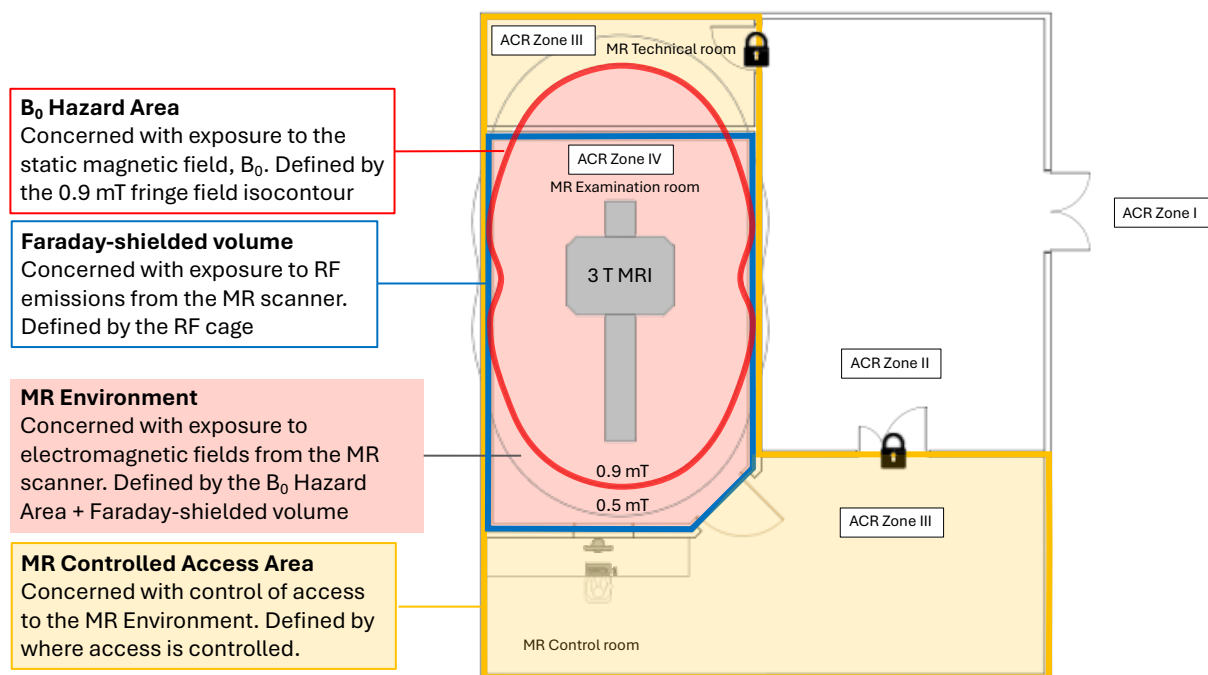


Figure 1. Plan of an MR suite (reproduced from MHRA guidelines with permission) showing the different defined MRI safety zones around an example 3T MR scanner. The [B<sub>0</sub> Hazard Area](#) is defined by the 0.9 mT static magnetic field isocontour that is indicated by the red line. The Faraday-shielded volume is defined by the RF cage that is indicated by the blue line. The combination of the [B<sub>0</sub> Hazard Area](#) and Faraday-shielded volume define the extent of the [MR Environment](#), indicated by the red shaded area. The [MR Controlled Access Area](#) is indicated by the yellow shaded area, with each entrance to the [MR Controlled Access Area](#) indicated by a padlock symbol. This figure also highlights the four MR safety zones described by the ACR manual on MR safety ([ACR 2026](#)) that some UK-based MRI installations find helpful to use.

## Abbreviations

|       |                                                                                   |
|-------|-----------------------------------------------------------------------------------|
| ACR   | American College of Radiology                                                     |
| AHU   | Air Handling Unit                                                                 |
| AXREM | Association of Healthcare Technology Providers for Imaging, Radiotherapy and Care |
| BMS   | Building Management System                                                        |
| CDM   | Construction (Design and Management)                                              |
| CIBSE | Chartered Institution of Building Services Engineers                              |
| CIED  | Cardiac Implantable Electronic Device                                             |
| DICOM | Digital Imaging and Communications in Medicine                                    |
| EPO   | Emergency Power Off                                                               |
| FBC   | Full Business Case                                                                |
| HBN   | Health Building Note                                                              |
| HRB   | Higher-Risk Building                                                              |
| HSE   | Health & Safety Executive                                                         |
| HTM   | Health Technical Memorandum                                                       |
| HVAC  | Heating, Ventilation, and Air Conditioning                                        |
| IEC   | International Electrotechnical Commission                                         |
| IPEM  | Institute of Physics and Engineering in Medicine                                  |
| MEP   | Mechanical, Electrical and Plumbing                                               |
| NHSE  | National Health Service England                                                   |
| OBC   | Outline Business Case                                                             |
| PACS  | Picture Archiving and Communication System                                        |
| PCSA  | Pre-contract services agreement                                                   |
| RAMS  | Risk Assessment and Methods Statement                                             |
| RIBA  | Royal Institute of British Architects                                             |
| RF    | Radio Frequency                                                                   |
| SCOR  | Society and College of Radiographers                                              |
| SOC   | Strategic Outline Case                                                            |
| SPS   | Secondary Power Supply                                                            |
| UPS   | Uninterruptible Power Supply                                                      |

## List of tables

|                                                                                                                                            |     |
|--------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Table 1. Key individuals and groups specific to new MRI installations that should be considered for the client team. ....                  | 16  |
| Table 2. Key individuals/groups in the context of MRI that should be considered as part of the design team for new MRI installations. .... | 29  |
| Table 3. Example activities associated with the build phase of a new MRI installation project. ....                                        | 95  |
| Table 4. Example activities associated with delivery and installation phase. ....                                                          | 105 |
| Table 5. List of non-imaging acceptance test checks relevant to a typical MRI installation. ....                                           | 111 |

## List of figures

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Figure 1. Plan of an MR suite (reproduced from MHRA guidelines with permission) showing the different defined MRI safety zones around an example 3T MR scanner. The B <sub>0</sub> Hazard Area is defined by the 0.9 mT static magnetic field isocontour that is indicated by the red line. The Faraday-shielded volume is defined by the RF cage that is indicated by the blue line. The combination of the B <sub>0</sub> Hazard Area and Faraday-shielded volume define the extent of the MR Environment, indicated by the red shaded area. The MR Controlled Access Area is indicated by the yellow shaded area, with each entrance to the MR Controlled Access Area indicated by a padlock symbol. This figure also highlights the four MR safety zones described by the ACR manual on MR safety (ACR 2026) that some UK-based MRI installations find helpful to use. .... | 7  |
| Figure 2. Mapping of typical governance stages and MRI installation project phases to the RIBA plan of work stages. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 13 |
| Figure 3. Main differences between traditional, design & build and turnkey procurement solutions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 25 |
| Figure 4. Example MRI functional workflow diagram for the flow of patients within the MR suite. After the MRI examination, patients may spend some time within a recovery area before returning to the patient changing (outpatients) or patient transfer area.....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 31 |
| Figure 5. MR Controlled Access Area signage from the IPEM MRI warning signage templates.....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 33 |
| Figure 6. Two example layouts for fire compartmentalisation. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 35 |
| Figure 7. Example of wooden frame providing electrical isolation between honeycomb waveguides in the RF cage and external air ducting. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 50 |
| Figure 8. IPEM door and floor warning signs (IPEM 2017) and an example of both in practice, additionally demonstrating a second copy of signage on the inside of the door to maintain a visible warning sign when the door is open .....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 52 |
| Figure 9. Example of artificial skylight designed for use in the MR Examination room and an RF-shielded window, both of which can help to improve the patient experience of an MRI scan. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 57 |
| Figure 10. Example of change in floor colour to visually demarcate a specific threshold of the magnetic field.....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 58 |
| Figure 11. Example of anchor point in wall providing scope for non-ferromagnetic chain to tether an MR Conditional anaesthetic machine to avoid it being taken closer to the MR scanner than intended. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 59 |
| Figure 12. Example of wall mounted emergency magnet off button with protective guard flap to avoid accidental activation and the new signage label introduced in IEC 60601-2-33 (2022).....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 60 |
| Figure 13. Examples of oxygen monitoring displays in the MR Control Room.....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 63 |
| Figure 14. Heating, ventilation, and air conditioning (HVAC) mimic panel, providing information on the chilled water entering the facility, magnet and MR Control room temperature and relative humidity. The oxygen sensor alarm and emergency extract fan status are shown as is the chiller status. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 63 |
| Figure 15. Example of IPEM signage for the labelling of various MR safety related items. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 64 |
| Figure 16. Examples of quench pipe outlet designs. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 77 |
| Figure 17. MRI quench pipe outlet warning signage from IPEM MRI safety notices. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 79 |
| Figure 18. Example of MRI supporting plant. The air handling unit is highlighted by the yellow dotted box. Also shown is the condenser unit for the MR Examination room air conditioning and the MR chiller system that provides chilled water to the MR system heat exchanger located in the equipment room. The red dotted line partially shows the magnet access. This wall is demolished for installation/removal of the magnet. ....                                                                                                                                                                                                                                                                                                                                                                                                                                       | 83 |
| Figure 19. Example RF cage results, showing the shielding effectiveness at 30 MHz, 63 MHz and 128 MHz, demonstrating all results were greater than 100 dB. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 96 |
| Figure 20. Loose cables trailing on the suspended ceiling within the RF cage are known to be a source of RF spikes and should be avoided by use of secure cable trays and mounting brackets. ....                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 98 |

# 1 Introduction

This guidance provides support for the planning, installation, acceptance and subsequent use of new clinical MRI installations. It has been drafted with a UK focus, but it is anticipated that many aspects of this guidance may be relevant more generally to new clinical MRI installations. This work aligns with the [MHRA guidelines for MR safety \(2026\)](#), the primary reference for MR safety guidance in the UK, as well as more general MHRA guidance on the management of medical devices ([MHRA 2021](#)). These guidelines have been developed in parallel with the forthcoming update of the NHS Health Building Note 06-01 ([HBN 06-01](#)) that provides more general guidance for diagnostic and interventional imaging. Where relevant, reference is made to other HBNs<sup>1</sup> and Health Technical Memoranda (HTMs)<sup>2</sup>. Note, Wales and Scotland publish versions of the HBNs and HTMs applicable to their national health systems. Other guidance to support the design of imaging services more generally includes the US Department of Veterans Affairs [Imaging Services Design Guide \(2026\)](#). Finally, this guidance incorporates some site planning information provided by individual MR manufacturers.

The target audience for this guidance is MR staff, hospital estates and facilities professionals, architects, engineers and other professional groups involved with the planning of new MRI installations. This document is written predominantly with the fixed installation of superconducting horizontal bore whole-body MR systems in mind (generally 1.5T or 3T), since these are currently the most common. However, this guidance is expected to be helpful to those planning to install other designs of MR scanner, including mobile scanners, MR systems based on permanent or resistive magnet system designs, and superconducting systems that do not require a helium quench pipe. This guidance aims to make suggestions based on considered best practice, while recognising that in many cases there may be a local need for variations. NHSE also provide guidance on managing and reporting derogations from HBNs, HTMs and other NHS estates related standards or guidance documents ([NHSE 2023](#)).

This guidance has been developed by a multi-professional working group with representation from the following stakeholders.

- Architects for Health
  - Hal Jones, Floyd Slaski Architects Ltd
  - Franko Covington, Building Design Partnership Ltd
- Association of Anaesthetists
  - Chloe Fairbairns, South Tees Hospitals NHS Foundation Trust
- Association of Healthcare Technology Providers for Imaging, Radiotherapy and Care (AXREM)
  - Craig Buckley, Siemens Healthineers
  - Terry Heathcote, Siemens Healthineers
  - David Martin, formerly Siemens Healthineers
  - Matthew Clemence, Philips Healthcare
  - Clare Harris, Philips Healthcare
  - Gavin Houston, GE HealthCare
  - Allen Munt, GE HealthCare
  - Chris Wilson, GE HealthCare
  - Huw Shurmer, Fujifilm
  - Megan Newberry, Fujifilm
  - James Davies, Esaote
  - John Manchester, Esaote

---

<sup>1</sup> A complete list of HBNs is available at <https://www.england.nhs.uk/estates/health-building-notes/>

<sup>2</sup> A complete list of HTMs is available at <https://www.england.nhs.uk/estates/health-technical-memoranda/>

- Gary Fletcher, McNaughts
- British Association of Magnetic Resonance Radiographers (BAMRR)
  - Rachel Watt, NHS Grampian
- British Institute of Radiology (BIR)
  - Martin Graves, University of Cambridge
- Institute of Healthcare Engineering and Estate Management (IHEEM)
  - Andrew Ward, NHS Wales Shared Services Partnership
- Institute of Physics and Engineering in Medicine (IPEM)
  - David Price, Guy's & St Thomas' NHS Foundation Trust
  - Maria Schmidt, Royal Marsden NHS Foundation Trust
  - Cormac McGrath, Belfast Health & Social Care Trust
  - Dan Wilson, Leeds Teaching Hospitals
  - Siân Curtis, Bristol NHS Foundation Trust
  - Geoff Charles-Edwards, Guy's & St Thomas' NHS Foundation Trust, Royal Marsden NHS Foundation Trust
  - Rebecca Quest, Imperial College Healthcare NHS Trust
  - Mike Hutton, The Christie NHS Foundation Trust
- Medicines and Healthcare products Regulatory Agency (MHRA)
  - David Grainger, MHRA
- Royal College of Radiologists (RCR)
  - Mark Radon, Walton Centre NHS Foundation Trust
- Society and College of Radiographers (SCoR)
  - Alex Lipton, Society and College of Radiographers

Contributions from the following individuals during the preparation of this guidance are gratefully acknowledged.

- Niven Smith & Shane Greenwood, Envirotec Ltd
- Ilhem Toumi & Jean-Pierre Fronte, ETS-Lindgren
- Tobias Gilk, Gilk Radiology Consultants
- Gordon McKenzie, Imedco
- Michael Steckner, MKS Consulting
- Alexandra Guthrie & Sandy Thompson, National Fire Chiefs Council
- Abigail Pride & Michael Rope, NHS England
- Michael Bernard, Andy White & David Haire, Siemens Healthineers
- Yvonne Kinsella, UK Health Security Agency

In preparing this guidance, the working group invited the wider MRI community to share real-world examples of issues encountered with new MRI installations, particularly those that might have been avoided or reduced with greater awareness and consideration of relevant issues and more informed decision making. Selected submissions are presented throughout this guidance as short case examples that aim to highlight the relevance of specific recommendations. In several cases, multiple contributors reported the same or similar issues.

A draft of this guidance was made publicly available for review between February-March 2026. A total of 443 comments were received, all of which were carefully considered by the working group in finalising this guidance. All contributions are gratefully acknowledged.

Any further comments on this guidance are welcome and should be sent to [MR-installation-guidance@bir.org.uk](mailto:MR-installation-guidance@bir.org.uk)

This guidance is structured into various phases, mapping onto the Royal Institute of British Architects (RIBA) work stages ([RIBA 2020](#)) that are widely used in many NHS capital development projects.

- **Project brief & feasibility (RIBA stages 0-1).** This covers initial work to consider what is required, the feasibility of different options, typically leading to the development of a strategic outline case (SOC).
- **Design (RIBA stages 2-4).** This covers the full design of the MRI installation.
- **Build (RIBA stage 5).** This section covers the building works associated with a new MRI installation.
- **Installation (RIBA stage 5).** This section is concerned with the installation of the MRI equipment itself.
- **Acceptance (RIBA stage 6).** This phase covers some of the checks performed on behalf of the purchaser that ultimately lead to formal acceptance and handover of the MRI installation.
- **Use (RIBA stage 7).** This phase highlights issues relating to the use and eventual decommissioning of the MRI installation.

Verbal forms in this guidance aim to follow those used in ISO standards<sup>3</sup>, where

- “shall” indicates a requirement
- “should” indicates a recommendation
- “may” indicates a permission
- “can” indicates a possibility or a capability

The governance of NHS capital development projects often starts with the production of a strategic outline case (SOC), which if approved progresses to an outline business case (OBC) and ultimately a full business case (FBC), capturing the project's design with regards to financial, management and operational aspects. Figure 2 shows how these governance stages often map to the phases in this guidance and in turn onto the RIBA work stages. Importantly, this alignment to the RIBA work stages is indicative and this may vary for individual projects. For example, a SOC might include RIBA Stage 2 Concept Design due to project-specific characteristics. Typically, construction will not start until approval of the Full Business Case (FBC) which normally precedes the release of funding for work to commence. Additionally, the order for the MR system is typically placed after the FBC is approved. Project teams therefore need to plan for a period of design coordination at the start of RIBA Stage 5, when the MRI suppliers are fully engaged and ready to prepare their final drawings. However, earlier coordination can help to lower the risks. A period of final coordination with the MR supplier may also be covered prior to Stage 5 via a pre-contract services agreement (PCSA). Completing the design and coordination with the MR supplier will enable the Principal Contractor to finalise the proposed contract sum and construction programme.

---

<sup>3</sup> <https://www.iso.org/ISO-house-style.html>

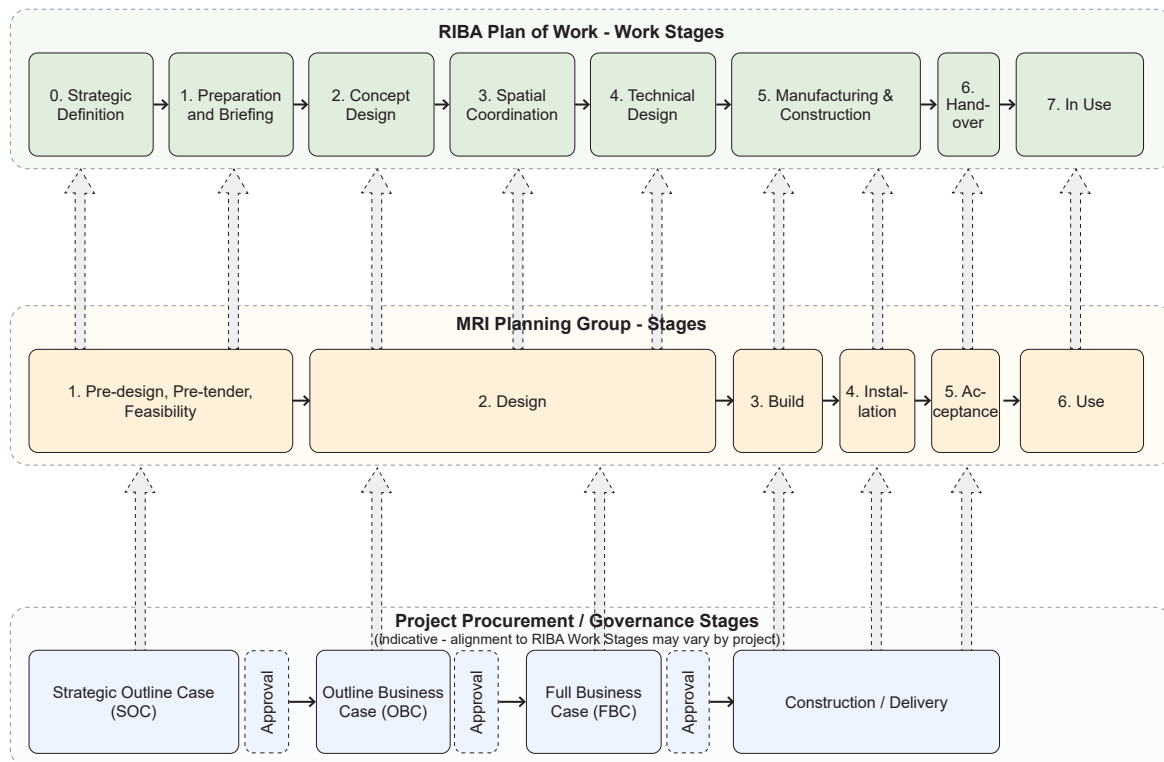


Figure 2. Mapping of typical governance stages and MRI installation project phases to the RIBA plan of work stages.

For building projects that fall within the Building Safety Act definition of Higher Risk Building (HRB), the RIBA Stage 4 design proposals should be fully coordinated with the MR supplier's proposals prior to making the building regulations application (Gateway 2). RIBA Stage 5 Construction work should not start until approval from the Building Safety Regulator is granted. An RIBA Stage 4 PCSA period or equivalent would be appropriate for an HRB process. During the PCSA, all specialist design subconsultants that are relevant to building regulations compliance, such as mechanical and electrical subcontractors, RF cage designers, fire stopping specialists, etc. need to be appointed to ensure a fully coordinated and demonstrably compliant design.

Regarding the procurement process, for NHS organisations, procurement is covered by national legislation. While there are national procurement schemes, different organisations may have individual approaches to tendering and procurement of new equipment. Consequently, it is important to engage with procurement colleagues within the local organisation early on in a new MRI installation project to seek guidance on the local processes and options available. For countries within the UK, the following bodies can provide further advice.

- England: NHS Supply Chain: for contractual and purchasing procedures. MR scanners and associated option and related services, <https://www.supplychain.nhs.uk/product-information/contract-launch-brief/magnetic-resonance-imaging-scanners-and-associated-option-and-related-services/>
- Scotland: Scottish Healthcare Supplies
- Wales: Welsh Health Supplies for procurement matters and Welsh Health Estates for Technical and Estates related issues. <https://nwssp.nhs.wales/ourservices/specialist-estates-services/our-services/diagnostics-and-therapies/>
- Northern Ireland: Department of Health, Social Services and Public Safety



Additionally, the MHRA's guidelines for the management of medical devices ([MHRA 2021](#)) provide some recommendations on appropriate acquisition and selection. Importantly, while resources such as the NHS supply chain can provide a helpful overview of available MR systems ([NHS Supply Chain 2025](#)) this information may not be complete or fully up-to-date and therefore seeking confirmation from the MR manufacturers directly is recommended. Many new MRI products are announced at the Radiological Society of North America (RSNA) annual meeting that historically has occurred at the end of November each year, although some options may not be immediately available to purchase. Additionally, new MRI products have been announced at other scientific meetings such as the European Congress of Radiology (ECR) and the International Society of Magnetic Resonance in Medicine (ISMRM).

The range of options for an individual MR system can be very broad, particularly for software-based options, and additional complexity may arise where MR manufacturers group certain options together. To help provide clarity on what is included in any tender offer it is recommended to request a corresponding list of items that are **not** included in any offer. Additionally, if procuring through a third party, it is strongly recommended to check the final specification, ideally with the supplier directly where possible, to help identify any errors before the order is placed.

**Real-world example: misunderstanding over what was included in tender**


It was misunderstood by MR staff that the list of options purchased with an MR system included one for extended table movement that was required to support a need for whole-body MRI scanning. This was not identified until after the MR system was installed.

**Impact: The MR system was unable to provide whole-body MRI examinations until the MR system was replaced 15 years later.**

Similarly, there may be various options available regarding servicing of MR equipment. If certain features are considered essential or desirable for the service support, it may be helpful to specify them within the statement of requirements as part of any invitation to tender. Additionally, since a small proportion of the total cost of the MR system is often held back until the system has been formally accepted, it is recommended to specify what the acceptance criteria should be as part of any invitation to tender.

Finally, to gain a practical insight into MR systems under consideration, visiting existing users of the equipment at other sites is recommended to seek and discuss their experiences. MR manufacturers are often able to help with organising such visits.

## 2 Project brief & feasibility (RIBA stages 0-1)



### 2.1 Introduction

This section highlights aspects of MRI site planning that are recommended as part of developing the project brief and assessing the feasibility of location options for a new installation. These steps are performed prior to the formal design phase.

At the end of this phase of the project there should be enough information to allow a high-level comparison of advantages and disadvantages of different options, including basic costings, that can be used to produce a strategic outline case (SOC).

### 2.2 Client team

The client team are responsible for compiling the project brief that is required to inform the design ([RIBA 2020](#)). They are also key to each subsequent stage in the project, providing clarifications and oversight to help ensure the project meets their vision as much as possible. Some members of the client team may additionally contribute to, or be part of, the design team. Table 1 highlights several individuals and groups that are important to consider involving within the client team for new MRI installations. [HBN 00-01](#), that provides general design guidance for healthcare buildings, highlights the importance of patient and public involvement in strategic planning. This is echoed by patient bodies such as the Patients Association, who encourage involvement of patients and carers in the design of local diagnostic services ([Patients Association, 2024](#)).

| Key individuals/groups                                          | Key roles and responsibilities in this project phase                                                                                                                                                                            |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MR service manager                                              | To help define the clinical need and workload and to ensure that the facility can support all required processes. Share existing MR management policy documents with the project team.                                          |
| MR Clinician                                                    | To support definition of the clinical needs for the project. It is expected that the clinical specialty will match the MRI service, i.e. a radiologist for a radiology-led MRI service, a cardiologist for a cardiology service |
| Researchers                                                     | If applicable, to support definition of the research needs for the project                                                                                                                                                      |
| Supporting clinical services where relevant (e.g. anaesthetics) | To help provide high level requirements regarding supporting clinical services                                                                                                                                                  |
| <a href="#">MR Responsible Person</a>                           | To ensure appropriate MR safety within the project brief                                                                                                                                                                        |
| Lead MR radiographer                                            | To provide general radiographer input into the project brief. Often the lead MR radiographer will also be the <a href="#">MR Responsible Person</a> .                                                                           |
| <a href="#">MR Safety Expert</a>                                | To provide technical expertise to ensure appropriate MR safety within the project brief.                                                                                                                                        |
| MR physicist                                                    | To provide general physics input into the project brief. Often the MR physicist will also be the <a href="#">MR Safety Expert</a> . For clinical MR suites in the UK, the MR physicist is generally expected to                 |

|                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                         | have Health and Care Professions Council (HCPC) registration as a Clinical Scientist.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| IT personnel                                                            | To ensure any new facility meets the need of the users in communication, data management and security, access to PACS and other relevant systems. Their involvement may be more substantial in the design phase, but it may be helpful for them to be involved earlier to help identify potential issues.                                                                                                                                                                                                                                                                       |
| MR manufacturers                                                        | Although the formal tender process may not start until the end of the design phase once the full business case (FBC) has been approved, MR manufacturers will often be able to provide valuable support at this phase of a project and their engagement is recommended as early as possible. A pre-contract services agreement (PCSA) may be considered if required.                                                                                                                                                                                                            |
| Hospital Estates                                                        | High level overview on location options and risks, e.g. power supply, structural information, long-term site plan, etc. Additionally, provision of 'golden thread' building information (e.g. power supply, water supply, structural information, fire safety information, etc) to the design team before design work commences to satisfy Building Safety Act.                                                                                                                                                                                                                 |
| Design Team – including statutory Principal Designer duty holder roles. | High level overview on design options and risks, e.g. overall area available for <a href="#">MR Controlled Access Area</a> , structural slab to slab height and loadings, MRI access for install and replacement, quench pipe route, Mechanical, Electrical and Plumbing (MEP) infrastructure and plant space, adjacent areas that may affect or be affected by the magnet, broader building context issues – patient flows, fire safety, construction access etc. Identify all designer appointments, their scopes of work and establish the designer's responsibility matrix. |
| Healthcare planner                                                      | Sites may consider utilising the services of a Healthcare Planner to help lead the development of stakeholder consensus and oversee its synthesis throughout the design and planning process. Support from a healthcare planner may be more relevant for larger developments where capacity planning and clinical flow assessment is required.                                                                                                                                                                                                                                  |

Table 1. Key individuals and groups specific to new MRI installations that should be considered for the client team.

## 2.3 General clinical requirements

Clearly defining the general aims and requirements of a new MRI installation is a crucial first step to enable identification and comparison of feasible options. A key component of this is to define the different patient cohorts and MRI services that are to be accommodated, since this in turn will help identify additional stakeholders that should be approached for the provision of expert advice to help define the general clinical requirements at this stage of the project, and to input into later stages of the project. The requirements for an MRI installation aiming to provide only basic MR imaging services for ambulatory outpatients are likely to be very different from one designed to also support more complex procedures on inpatients.

A key decision here is whether to include provision for anaesthetic cases at some point during the expected lifetime of the MR system, since modifications to an operational MR suite to introduce the capability for anaesthetic cases may be more limited, costly and disruptive. A three-level classification, based on patient acuity and levels of sedation and/or intervention, that is suggested for radiological imaging suites in the US ([US Department of Veterans Affairs, 2026](#)), may be helpful to guide subsequent designs.

Another important consideration is the potential need to support paediatric patients as well as specialised procedures such as MRI for radiotherapy planning, intraoperative and interventional MRI services. An MR system aimed at performing only head MRI scans may not require the full scope of patient table movement through the scanner, which subsequently may allow for compromises in the size of the MR Examination room.

It is important to consider the many different people that may accompany patients, both clinical (e.g. nursing, anaesthetic teams) and non-clinical (e.g. relatives, carers, police/prison officers, interpreters, religious/cultural chaperones), all of whom will have an impact on space requirements. [HBN 06-01](#) provides general guidance regarding the pathways for different patient groups, as well as functional relationships, workflows and logistics for the planning of a new MR suite.

The general clinical requirements should consider the range of MR services that are to be offered and the expected patient throughput, both now and during the expected lifetime of the MR system, since these factors have a significant impact on general space requirements as well as more specific aspects of the design. In particular, it is important to consider the impact of continually accelerating MR examinations on the design of other aspects of the MR suite associated with before/after the MR examination to avoid these becoming a bottleneck for safe and efficient workflows. Finally, operational continuity and the level of resilience should be defined, since this will impact the design, particularly regarding engineering specifications.

All the above considerations will ultimately feed into defining appropriate staffing requirements for the new MR installation.

## 2.4 General space requirements

MRI installation projects generally fall into one of the following types

- Replacement of an existing MR scanner with no, or minimal, changes to the building,
- Installation of a new MR scanner into a re-purposed existing building. This may include expansion of an existing MR suite.
- Installation of a new MR scanner in a new purpose-designed building.

The space requirements for each of these may vary significantly. Additionally, an independent MR suite is likely to require a larger footprint than one that is sited within a larger imaging department where facilities such as reception and waiting areas can be shared.

Although MR manufacturers provide specifications regarding minimum space requirements for a particular MR system, this is typically focused on accommodating the equipment only, without consideration of how the system is to be used and clinical requirements more generally. Designing solely to manufacturer minimum specifications, without reference to clinical workflows and patient cohorts, is likely to result in operational constraints, reduced throughput, compromised patient experience, and the need for costly retrospective modifications once the MRI service becomes operational. It is important that the overall space requirements for an MRI installation are defined by the overall clinical need. Ignoring this and simply designing to an MR manufacturer's minimum

specifications can have serious negative implications for when the MR suite becomes operational, again highlighting the importance of defining the expected patient cohorts and workflows as the first step in any new MRI installation.

[HBN 06-01](#) provides general guidance on space requirements for MR installations, including the following.

- **Patient access:** Patients may not be ambulant, may require transfer to an [MR Conditional](#) wheelchair or bed. In-patients may need to be transported in a bed, and thus require wider corridors, turning points and a location for the transfer to an MR-Safe/Conditional trolley. Additionally, consideration should be given to the installation of a patient hoist and the appropriate space to operate this.
- **Patient Facilities:** Space for private conversations when screening patients is essential; activities requiring private space also include giving consent to procedures (clinical and research) and counselling. Furthermore, patients require changing facilities, lockers to store their belongings, access to a toilet and drinking water. Separate areas for paediatric patients are desirable. Some patients will be accompanied by chaperones, guardians, carers, and translators. Poorly designed or under-dimensioned waiting areas may limit patient throughput and compromise safety.
- **MR examinations under General Anaesthetic (GA) or sedation:** space required for equipment, personnel, and activities such as patient preparation and recovery. A separate space for paediatric procedures is desirable. GA personnel take up space either in the MR Control room or MR Examination room during examinations. If provision for GA cases is planned, it is recommended to consider accommodating additional non-MRI procedures that may be desirable to carry out while the patient is anaesthetised, e.g. lumbar puncture and dental procedures, and the requirements for the associated additional staff and equipment.
- **Clinical Procedures:** Space is required for cannulation of patients prior to the examination and recovery from invasive procedures (MR-guided biopsies and others). Staff require handwashing facilities in the vicinity of those activities. First aid, addressing allergic reactions and adverse events, resuscitation and other clinical interventions require a dedicated private space and equipment that should be stored in the vicinity. Some clinical procedures require bowel and bladder preparation, and are only viable if a toilet is available very close to the MR scanner.
- **Storage:** Auxiliary equipment such as an [MR Conditional](#) bed and wheelchair, trolleys and stepladders should be available to the MR Unit. Other specialist activities require equipment to be stored: MR-guided focused ultrasound, Radiotherapy planning accessories, MR-guided biopsies, etc. GA equipment needs storing when not in use, and some equipment needs charging (e.g. injectors). Although equipment does not need to be stored within the [MR Controlled Access Area](#), there are many advantages in having dedicated equipment in MRI, as the workload in checking whether they are [MR Safe](#) /[MR Conditional](#) is significant.
- **Administration:** Administrative tasks require a separate space and a degree of privacy. Administrative personnel make direct contact to the general public and may need to enter/leave the [MR Controlled Access Area](#) frequently.
- **Staff Facilities:** MR Staff require changing facilities and storage space for their belongings. MR staff need access to rest areas for breaks.

These are discussed further in the design section of this guidance.

A more specific space-related decision for the local site to consider at the start of the project is what static magnetic field threshold will be used for controlling access to the high magnetic fields around the MR scanner to protecting against inadvertently changing the function of pacemakers and some other implantable medical devices, an area now defined as the [B<sub>0</sub> Hazard Area](#). Historically, this was 0.5 mT, with the primary reference for this threshold recognised as the international standard IEC

60601-2-33. This was recently updated to 0.9 mT ([IEC 60601-2-33, 2022](#)), with the main benefits of this change recognised as increased flexibility for the installation of MR systems into limited spaces, as demonstrated in Figure 1, with potentially significant cost savings ([Steckner et al. 2024](#)). In the UK, there remains a legal requirement under the Control of Electromagnetic Fields at Work Regulations 2016 to assess the risks of any occupational exposure to static magnetic fields above 0.5 mT and put appropriate control measures in place. A local decision to recognise 0.9 mT as an appropriate threshold may be incorporated into such a local risk assessment.

## 2.5 General MR system requirements

Once the general clinical aims for a new MRI installation have been established, it is necessary to consider some general requirements for MR systems to help rule out unsuitable location options early in the project. MR manufacturers provide lists of requirements as part of their site planning guide (sometimes known as a preinstallation manual) for specific MR scanner models. These site planning guides are generally accessible, and the client team are encouraged to seek copies from MR manufacturers that are likely to be of interest. It may be worth recognising that a recent addition to [IEC 60601-2-33](#) now requires the inclusion of safety-relevant information in site-planning documentation for use by the [MR Responsible Organisation](#) for construction and building provisions necessary for safe installation and operation of the MR equipment. Additionally, involvement of representation from the MR manufacturers at this stage in the project can be helpful to provide general guidance when exploring location options for a new MR installation.

It is in the best interests of the users for a site to be as compliant as possible with the site planning guide for the selected MR system to enable the manufacturer to meet their own performance specifications for the MR scanner, although it is important to consider that the local clinical requirements may exceed those of the MR system, particularly regarding space. Since selection of the MR system will typically occur later in the project, it may be helpful to consult site planning guides for a number of potential MR systems and to apply additional margins to stated specifications to cover the uncertainty of the selected MR system as well as provide flexibility for a future upgrade/replacement.

### 2.5.1 Proximity to ferromagnetic items and electrical equipment

The MR scanner can be adversely affected by nearby electronic equipment and ferromagnetic objects, resulting in impaired image quality. One example is the presence of a neighbouring MR scanner. Site planning guides list minimum distances between the isocentres of two scanners to avoid each impacting on the other in terms of the magnetic field homogeneity. Typically, these distances depend on the orientation of the magnetic field in relation to each other. Installing scanners closer than the recommended minimum separation distance may add cost and downtime during installation (and at other stages such as during remedial work and replacement) as they may require simultaneous magnetic field shimming.

The MR manufacturers' site planning guides typically included recommendations regarding minimum distances between the location of an MR scanner and various ferromagnetic items based upon their estimated mass. These include structural beams as well as moving large objects such as lifts, motor vehicles and trains. Additionally, electrical current in high voltage power lines, transformers, switches, motors, or generators near the magnet may also affect the MRI magnetic field homogeneity. All of these are potentially sources of what is sometimes described as low frequency environmental magnetic field variations. Site planning guides provide further details, often specifying a threshold for permitted current or distance of the equipment from isocentre. These thresholds may vary with the electrical current AC frequency. Furthermore, the fringe field from the MR scanner can impact on certain nearby medical equipment such as gamma cameras and



radiotherapy linear accelerators. Again, the site planning guides often provide recommendations on minimum distances between the MR scanner and such items.

The introduction of passive magnetic shielding (typically high permeability steel) can help to reduce these requirements slightly, although these are considered less effective for low frequency variations. However, active compensation systems are available which report an ability to reduce low frequency environmental magnetic field variations by two orders of magnitude. It is important to recognise the limits to which passive and active magnetic shielding can help support a non-ideal location for an MR system.

Since the usage of plant rooms change over time, often with the installation of new equipment at higher power rates, additional margins should be considered to avoid potential issues in the future. In case of doubt on the suitability of a particular site for an MRI installation, it is possible to perform a  $B_0$  test and measure the temporal magnetic field fluctuations at a particular proposed isocentre position, across a range of frequencies. This requires specialist equipment and is time consuming and expensive. Therefore, it is only viable to proceed with  $B_0$  tests for a few selected sites which have been pre-screened and appear to be suitable. The  $B_0$  test in itself relates to field fluctuations during the period of time that the measurement takes place. Consequently, it is important to ensure that the measurement is made during a period of representative use of the building. If required, there are options for magnetic shielding to limit the effects of these external magnetic field fluctuations on the MR scanner.

Additionally, the fringe static magnetic field from the MR scanner may adversely impact other equipment in the immediate vicinity to the [MR Controlled Access Area](#). In a hospital setting, equipment that may be particularly sensitive to the fringe magnetic fields include gamma cameras, PET scanners, CT scanners, X-ray analogue image intensifiers, linear accelerators and catheter magnetic guidance/navigation systems. Maximum permissible magnetic flux density (mT) levels for various pieces of equipment are often included in the MR manufacturers site planning guides, although it is recommended to consult the manufacturers of the neighbouring equipment for requirements more specific to the item of equipment.

It is possible to use passive magnetic shielding to limit the extent of the magnet fringe fields outside of the MR Examination room. In addition to cost implications, passive magnetic shielding increases the structural load requirements, which may further increase costs, and may take up some MR Examination room space. It should be planned at early stages, as part of the building structure. The amount of shielding required is calculated by vector field simulation of the magnetic field. This is performed by MR manufacturers or specialist companies. Additionally, MR manufacturers typically specify minimum distances between any shielding and the MR scanner. In some instances, the need for passive magnetic shielding can be minimized or even eliminated through thoughtful planning of the location and design of a new MR suite. Increasing the size of the MR Examination room may reduce the need for passive magnetic shielding, with a subsequent reduced structural load requirement.

MR manufacturers will have a minimum ceiling height for magnet installation to allow access to the top of the magnet. There should also be sufficient space above the false ceiling for the necessary services to be run, particularly ventilation ducting.

#### 2.5.2 Structural requirements & delivery/removal routes

The weight of whole-body MR scanners varies considerably. This has immediate implications for the structural requirements of potential locations, both in terms of the final position of the MR scanner

and for delivery/removal routes. Such structural requirements should feed into the planning of new buildings and need to be checked for existing buildings. If magnetic shielding is to be used to limit the extent of the [MR Environment](#) into areas adjacent to the MR Examination room, the weight of this shielding also needs to be taken into consideration. Structural changes to existing buildings can be considered to support additional loads if required. Of note, there are increasing options for superconducting MR systems that operate with very little helium, sometimes described as “dry” MR systems. This consequently reduces the weight of the MR scanner and the structural requirements.

Additionally, MR systems typically have requirements in terms of mechanical vibration. Special vibration absorbing mounts may be required in some cases where levels of vibration may be of concern. It may be advisable to carry out a vibration survey of any proposed sites for a new MRI installation to establish typical levels, and vibration requirements should be considered as part of the design of a new building.

In addition to supporting the magnet weight, there are restrictions on the ferromagnetic content of slabs and walls close to isocentre described in all site planning guides. A high ferromagnetic content may compromise the field homogeneity, making it impossible to shim the magnetic field to meet the manufacturer’s specifications. The ferromagnetic content is not necessarily known in existing buildings, particularly if the buildings are very old. As a result, it may be necessary to drill the slab for samples to be tested. Upgrading and modifying parts of the structure of older existing buildings can be prohibitively expensive, and therefore structural matters should be considered early in the site planning process.

It is important to consider the delivery route for each potential location of a new MR system at the early stages of the project, as it can have a significant impact on installation costs and in some cases may rule out potential location options. Delivery routes may involve lifting the magnet over existing buildings. There may be a need to reinforce the floor (temporarily or permanently) along the delivery route of the magnet. Deliveries to upper floors and listed buildings require particular attention. The MR manufacturers site planning guide will confirm the minimum clear dimensions required for access. Consequently, it is often preferable for MR Examination rooms to be located with or close to an external wall to aid delivery and future removal of the MR scanner, which also reduces the risk of changes over time that prohibit the same delivery route being used for the future extraction/replacement of the MR scanner. If the new MRI installation project includes construction of the building, then the building fabric should be designed so that the relevant section of external wall or roof can be removed and reinstated for future MRI replacement.

Consideration of the local site development control plan is important to identify if any proposed projects may impact on the future access for the eventual replacement of the new MR system. It is also important to maintain an access route throughout the lifetime of the MR system for the replacement of large components, e.g. the gradient coil, in the event of failure, and for deliveries of liquid helium that additionally requires consideration of associated legislation such as the Pressure Systems Safety Regulation.



**Real-world example: Delivery/removal route for MR scanner not maintained**

During the lifetime of an MR system, a new building was constructed, blocking the original and only route for MR scanner delivery/removal.

**Impact: At additional cost to the institution, the MR scanner was cut up into pieces to allow removal and reutilisation of the space. Associated loss of potential income from resale of magnet.**

**Real-world example: Delivery/removal route for MR scanner not maintained**

During the lifetime of an MR system, the original and only route for MR scanner delivery/removal was removed.

**Impact: The MR scanner was bricked up and left in situ, with subsequent loss of functional space within the hospital building.**

### 2.5.3 Chillers

An MR scanner generally requires a continuous (24 hours a day, 7 days a week) and uninterrupted supply of liquid coolant. This is typically provided by a dedicated chiller. Different parts of the MR system require cooling, depending on the specific design. In general, the most critical item is the compressor head (coldhead) which minimises the helium boil-off rate. Interruption of the supply of cold water has serious implications, as it will cause cryogenics to evaporate more quickly, and their replacement is costly. Therefore, the design of the chiller plant is also critical.

While basic specifications for the chiller are provided by MR manufacturers in their site planning guides, consideration should be given early in the project to the provision of a backup chiller solution based upon how critical the continued operation of the MR scanner is to the institution. Importantly, problems with chillers resulting in downtime of clinical MRI services are one of the most frequently cited frustrations among MRI users. The design and provision of resilient critical services is a key element to all building engineering services within healthcare as outlined in [HTM 00](#) core standards (Appendix A). Duplicate or shared load designs increase reliability and reduce the probability of clinical disruption. Additionally, they may help with preventative maintenance to the plant equipment with minimal disruption to the clinical service. For some MR systems, a backup chiller is listed as essential in the site planning guide. Notably, at least one of the main MR manufacturers reports that the majority of new MRI installations now incorporate a backup chiller to minimise the likelihood of MR system downtime.

**Real-world example: No backup chiller solution**

A clinical MR scanner with no backup chilled water solution was down for around 2 weeks when one of the components in the chiller failed and there was a long lead time on sourcing a replacement part, despite the chiller being maintained and serviced by an established contractor. The hospital was also liable for costs of replacing the helium that was lost during this period.

**Impact: MR scanner down for 2 weeks, replacement helium cost**

### 2.5.4 Temperature and humidity

MRI requires control of environmental temperature and humidity for the MR Examination room and equipment room (and sometimes the MR Control room), with specifications provided by MR manufacturers in their site planning guides. Therefore, decisions should be made early in the planning process on whether MR will have a dedicated air handling unit (AHU) or whether this

provision will be integrated with other facilities within the institution. As part of this, particular consideration should be given to humidification/dehumidification and the reliability of solutions for humidity control. Low levels of humidity increase the risk of electrostatic discharges that negatively impact image quality as well as potentially damaging electrical equipment. MR manufacturers may refuse to troubleshoot image quality problems if the room humidity is consistently too low. Excessively high humidity is a safety issue as it reduces patients' ability to thermoregulate during the MRI scan. Additionally, important safety-related calculations performed by the MR system may be invalid if the MR manufacturer's specifications for temperature and humidity are unmet. [HTM 03-01](#) provides general guidance on specialised ventilation in healthcare premises.

#### **Real-world example: No/insufficient dehumidification**

During summer months, the relative humidity in the MR Examination rooms regularly exceeded levels specified by the MR manufacturer and recommended in MR safety guidelines. Risk assessments on whether to scan were performed on a case-by-case basis.

**Impact: Added burden on MR staff, significant reduction in patient throughput and significant additional costs to retrofit air handling with appropriate dehumidification.**

#### 2.5.5 Power Supply

The power requirements for an MR scanner and supporting plant can be significant compared to other radiological equipment. Consequently, it is important to establish early on the maximum power requirements, including power quality, for potential MR systems and supporting plant, and to confirm whether these can be met at each of the locations being considered for siting the MR system. Where the available power is insufficient to meet the highest requirements, this may feed into identification of a limited set of MR systems that can be supported or planning for upgrade power supplies as part of the project. Consideration should be given to future MR scanner upgrades that may require increased power requirements, such as higher imaging gradient performance.

General advice on the power supply requirements for MR systems is provided in [HTM 06-01](#), although more up to date information may be provided by the MR manufacturers. Further discussions on suitable MR scanner power supplies, including uninterruptible power supply systems, are discussed in [Electrical power supply](#) section within the design phase of this guidance.

#### 2.5.6 Repurposing an existing RF cage

Keeping an existing RF cage may be considered for projects where an MR scanner is to be replaced/ upgraded without any structural changes to the MR Examination room layout. In these cases, a measurement of attenuation levels of the RF cage early in the project is important to establish its current performance and whether this is meeting MR manufacturer specifications. Such RF attenuation measurements may require a ramp down of the MR magnet.

In instances where it is identified that the MR manufacturer's original specifications are no longer met, the local site should make an informed, documented cost-benefit decision regarding continued use of the existing RF cage, informed by MR physics advice and with clear agreement on the acceptance of any residual risk. Specific points to consider include the following.

- The occurrence of external RF interference on MR images from the current MR scanner. MR systems can operate without external RF interference impacting on image quality when the RF cage is below spec ([Small et al. 2026](#)). However, this may not be true for all sequences (e.g. EPI-based imaging, spectroscopy, or quantitative techniques), and the risk tolerance

may differ between routine clinical imaging and advanced or research applications. In many cases the performance of the RF cage is already below spec when new MRI installations become operational.

- Localised remedial work on the RF cage, particularly around the MR Examination room door that is a common site for a drop in RF attenuation performance may help to increase attenuation levels ([Small et al. 2026](#)).
- New MR systems may be more sensitive to external RF interference. However, this working group are not aware of any examples where the existing RF cage has been used where the presence of external RF interference started after a new/upgraded system was installed.
- The replacement of an MR scanner provides an ideal opportunity to replace/work on the RF cage. While remedial work on the RF cage is possible at any point during the lifetime of an MR system, this may require additional costs to ramp down the magnet and subsequently ramp up.
- The MR manufacturer may decline to provide support for any image quality problems associated with external RF interference. However, this may be the case with any MR system where the RF cage is found to be below specification levels.

#### 2.5.7 MRI quench pipe route

At the time of writing, many MR systems require a quench pipe to vent helium gas from the MR scanner to outside of the building, with an appropriate location for the quench pipe outlet (also known as the quench pipe exhaust) to avoid individuals being exposed to the resulting plume of cold helium gas in the event of a magnet quench. The design of the quench pipe is discussed in the design stage of this guidance. However, consideration of potential routes of a quench pipe is advised early in the project to feed into the comparison of sites under consideration. Such systems also require consideration of solutions to address room overpressure in the event of the quench pipe failing during a magnet quench.

Importantly, there are increasing options for superconducting MR systems that operate with very little helium, sometimes described as “dry” MR systems. These do not require an MRI quench pipe, which may be beneficial when considering the feasibility of potential location sites.

## 2.6 Project delivery options

Consideration of project delivery options is recommended at this stage of the project to help with initial cost estimates. Figure 3 highlights the main differences between traditional, design & build and turnkey procurement solutions. The client should be satisfied that the preferred procurement route enables them to adequately plan, manage and monitor the project and to be satisfied with the competencies of all parties engaged in the project, all in accordance with the building regulations, building safety act, Construction (Design and Management) (CDM) regulations and any other applicable regulations. Regardless of procurement route, the Client should appoint the statutory Principal Designer roles, otherwise the Client will retain these responsibilities.

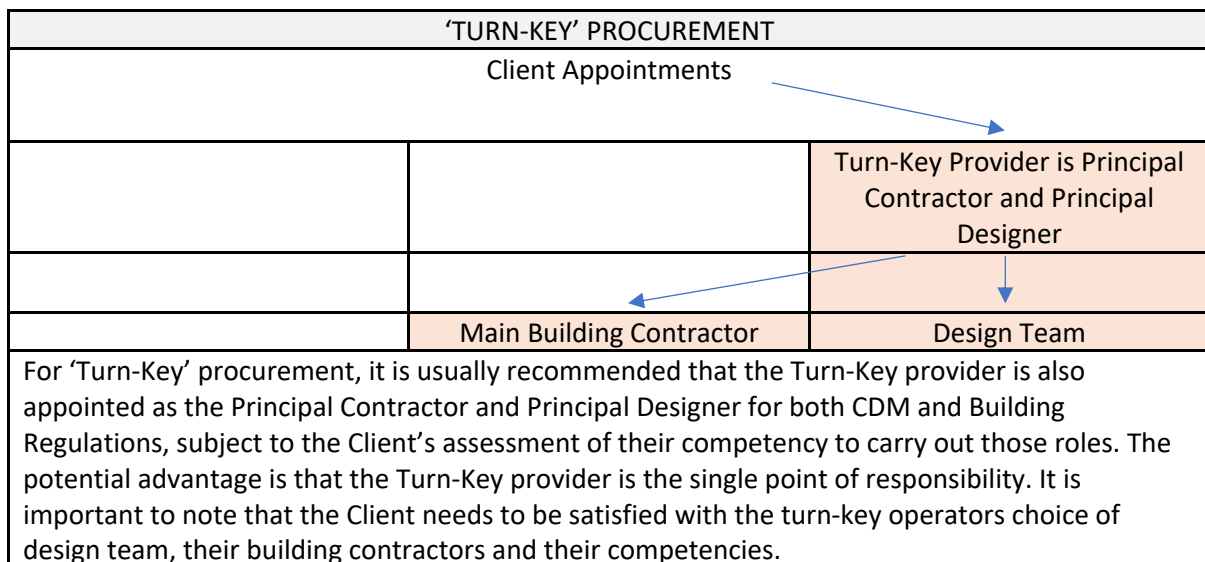
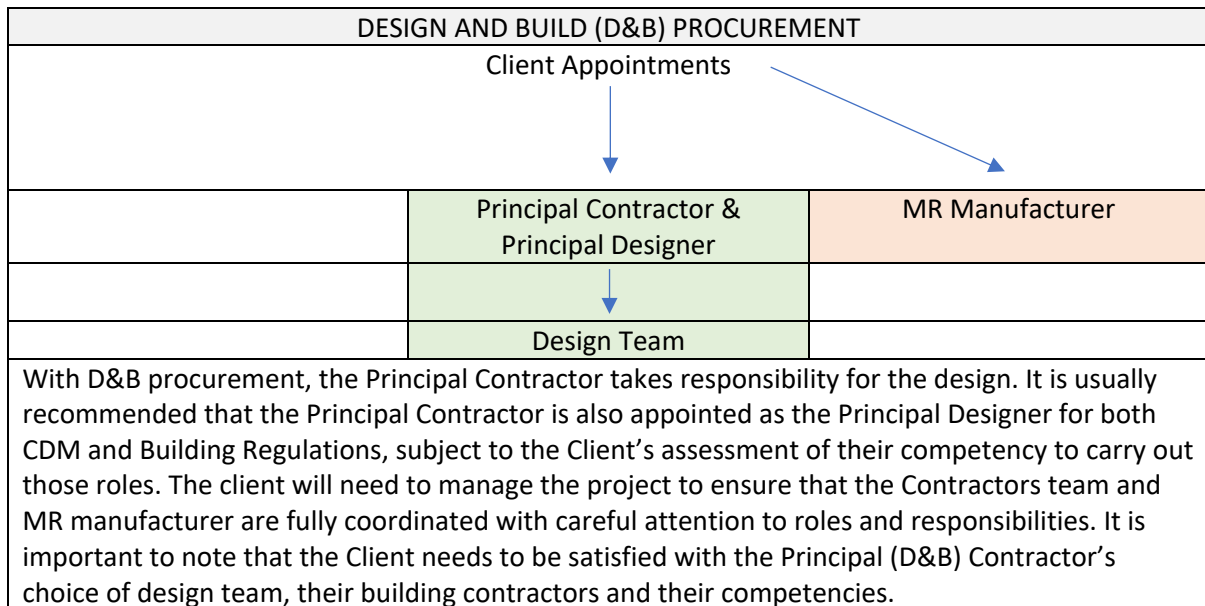
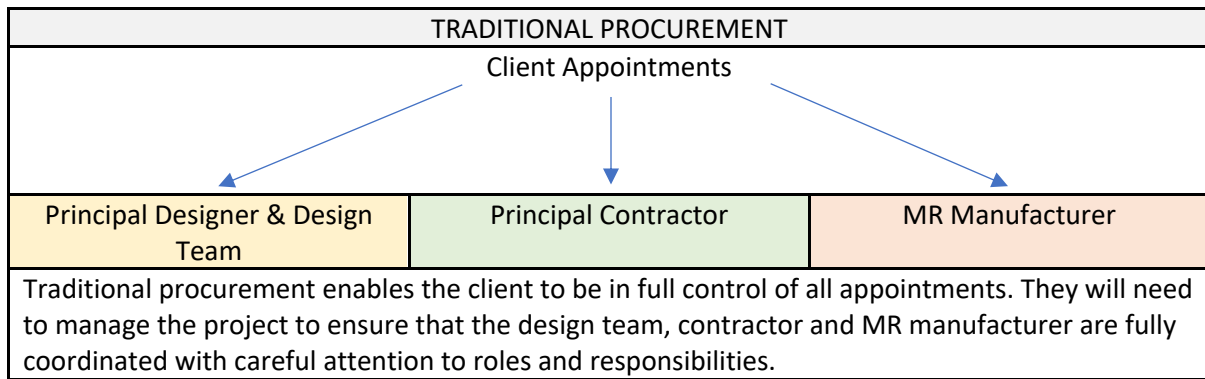


Figure 3. Main differences between traditional, design & build and turnkey procurement solutions

### Mobile/relocatable MR scanner to provide cover during replacement MRI projects.

For replacement MRI projects, planning for the temporary installation of a mobile/relocatable MR scanner on site can be helpful to maintain some level of MRI service during the building works, although this may be insufficient to support more complex MR services. All MR safety considerations such as defining an appropriate [MR Controlled Access Area](#) should be made for temporary MR scanners as they would be for permanent installations. Consideration should be given to matching the temporary MR scanners (make & model, RF coils, software options) to either existing or new MR scanners to minimise additional training needs for staff.

## 2.7 Summary & checklist

Considering all aspects of an MRI installation described above, the project team should be able to produce a shortlist of possible sites for a new MRI installation. These possible sites and the information gathered about them can now be put forward to MR manufacturers for a technical opinion on their viability for a range of their equipment models. Ideally, different opinions would be gathered and compared. MR manufacturers may suggest further specific tests to determine the viability of a given site ( $B_0$  tests, vibration assessment, etc) and these tests should be undertaken prior to committing to a particular site.

After the viability of the possible sites is confirmed, including confirmation of feasible delivery routes, an initial estimate of the costs of the installation can be produced, and the first version of the business plan can be completed. Ideally, this will enable the institution to make a final decision on the chosen installation site. However, it may be desirable to progress further design and investigation work on more than one option in order to reach a more informed final decision in the next phase of the project.

|                                                                                                                                                       |   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Client team</a>                                                                                                                           | ✓ |
| Key individuals/groups within the client team, including consideration of patient/public involvement, to ensure accurate definition of project brief? |   |

|                                                                                  |   |
|----------------------------------------------------------------------------------|---|
| <a href="#">General clinical requirements</a>                                    | ✓ |
| Defined the different patient cohorts and workflows that are to be accommodated? |   |
| Identified range of people that may accompany patients?                          |   |
| Identified additional stakeholders for aspects of the project design?            |   |
| Considered potential future expansion of services to be undertaken.              |   |
| Defined the level of operational resilience required?                            |   |


|                                                                                                                                                                                             |   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">General space requirements</a>                                                                                                                                                  | ✓ |
| Overall space requirements defined by the clinical need?                                                                                                                                    |   |
| Defined local magnetic field threshold for controlling access to the high magnetic fields around the MR scanner (e.g. 0.5 mT or 0.9 mT for the <a href="#">B<sub>0</sub> Hazard Area</a> )? |   |

|                                                                               |   |
|-------------------------------------------------------------------------------|---|
| <a href="#">General MR system requirements</a>                                | ✓ |
| Obtained site planning guides for MR systems of potential interest?           |   |
| Checked minimum distances between the isocentres of neighbouring MR scanners? |   |

|                                                                                                                                                                                                             |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Checked distances between proposed locations and large moving metal objects, e.g. lifts, motor vehicles?                                                                                                    |  |
| Considered B <sub>0</sub> test to be performed to measure the levels of magnetic field fluctuation at proposed MR scanner locations?                                                                        |  |
| Considered the distance from proposed MR scanner locations to high voltage power lines, transformers, switches, motors, or generators?                                                                      |  |
| Considered the need for passive magnetic shielding and active compensation systems where there is concern about sources of potential interference close to the proposed location of the MR scanner?         |  |
| Considered the potential impact of the fringe static magnetic field from the MR scanner on nearby equipment sensitive to magnetic fields?                                                                   |  |
| Considered the need for magnetic shielding to limit the extent of the magnet fringe fields outside of the MR Examination room?                                                                              |  |
| Considered vibration survey of any proposed sites for a new MRI installation to establish typical levels?                                                                                                   |  |
| Considered structural limitations of the proposed locations?                                                                                                                                                |  |
| Identified a potential delivery route for scanner delivery (and removal of old scanner) and servicing (e.g. large component replacement, helium supplies) for each proposed location?                       |  |
| Considered the local site development control plan to identify other proposed projects that may impact on the access route during the lifetime of the MR system or for a future replacement of the scanner? |  |
| Considered high-level options for chiller, including provision of a backup solution?                                                                                                                        |  |
| Considered high-level options for control of temperature and humidity?                                                                                                                                      |  |
| Confirmed the maximum power requirements for potential MR systems and supporting plant can be met for proposed locations?                                                                                   |  |
| Considered provision of a secondary power supply?                                                                                                                                                           |  |
| Considered provision of tertiary power supplies?                                                                                                                                                            |  |
| If upgrading existing MR system, considered scope to repurpose the existing RF cage, including RF attenuation measurements to establish current performance?                                                |  |
| Considered high-level options for the route of a potential MRI quench pipe and location of quench pipe outlet?                                                                                              |  |
| Completed high level definition of the MR Controlled Access Area for each proposed location?                                                                                                                |  |
| Considered feasibility of each proposed location against defined general clinical requirements and relevant HBNs & HTMs?                                                                                    |  |

|                                                                                                                                                                                  |   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Project delivery options</a>                                                                                                                                         | ✓ |
| Considered project delivery options?                                                                                                                                             |   |
| Considered installation of temporary mobile MR scanner on site for replacement MRI projects?                                                                                     |   |
| Provision of 'golden thread' building information (power supply, water supply, structural information, fire safety information, etc) to design team before design work commences |   |

## 3 Design (RIBA stages 2-4)



### 3.1 Introduction

This section describes the design phase of a new MRI installation project, highlighting issues that are particularly relevant to MRI that should be considered to help avoid problems during the subsequent use phase. Particular focus is made on the following aims.

- Ensuring appropriate safety of anyone in and around the MR suite who may be exposed to the hazards associated with MR scanners.
- Improving patient experience and efficient workflows.
- Minimising MR scanner downtime.

The design section focuses on recommendations for physical design requirements but also focuses on ideal configurations to reduce the probability that a ferromagnetic object could be taken into the MR Examination room. This includes the location of different rooms as well as line of sight to safety critical areas especially from the MR Control room.

Where relevant, the reader is directed to appropriate Health Building Notes (HBNs) and Health Technical Memoranda (HTMs) published by NHS England or their equivalent versions in Wales and Scotland. Consequently, general aspects of design that are not specific to MRI are not covered here except where the context is considered important.

Other sources of information to consider for the design of new MRI installations include the following.

- American College of Radiology (ACR) manual for MRI safety, Appendix 2: MR Facility Safety Design Guidelines ([ACR 2026](#))
- Optimization of MRI Turnaround Times Through the Use of Dockable Tables and Innovative Architectural Design Strategies ([Recht et al. 2019](#))

### 3.2 Design team

The design team are responsible for the design of the project based upon the requirements set out in the project brief ([RIBA 2020](#)), defined previously in the [Project brief & feasibility](#) phase of the project. Professional groups such as architects, structural engineers, electrical engineers, fire safety, infection control and project managers are inherently part of the design team for healthcare building projects in general. Incorporating individuals from these groups with previous experience of MRI installations is highly recommended. Where this is not possible, it is strongly recommended that individuals from these groups have access to support from colleagues with such experience.

Input into the design team from people with specialist knowledge about different aspects of MRI is key to ensure an optimal design and to avoid various pitfalls that can negatively impact work within the space for many years to come. Table 2 highlights some of these key individuals/groups. In certain cases, an individual may cover more than one role, e.g. the lead MR radiographer is often the [MR Responsible Person](#). Importantly, clinical staff need to be allocated sufficient time to allow them to fully engage and contribute as part of the design team.



| Key individuals/groups                                                                                                                                                                                               | Key roles and responsibilities in this project phase                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Lead MR Radiographer                                                                                                                                                                                                 | Radiographers are perhaps the professional group that will be most associated with working within the MR suite. Appropriate radiographer representation is key to ensure the design meets the clinical needs and supports safe and efficient workflows.                                                                                                                                                                                     |
| <a href="#">MR Responsible Person</a>                                                                                                                                                                                | To ensure appropriate MR safety within the design. The <a href="#">MR Responsible Person</a> is often covered by the lead MR radiographer.                                                                                                                                                                                                                                                                                                  |
| <a href="#">MR Safety Expert</a>                                                                                                                                                                                     | To provide scientific support to the <a href="#">MR Responsible Person</a> and project team on MR safety aspects of the design. Typically, the <a href="#">MR Safety Expert</a> role is covered by an MR physicist. For clinical MR suites in the UK, the <a href="#">MR Safety Expert</a> should normally have Health and Care Professions Council (HCPC) registration or General Medical Council (GMC) specialist registration.           |
| MR physicist                                                                                                                                                                                                         | Advise on the design and equipment from an MR physics point of view. Provide MR acceptance testing. For clinical MR suites in the UK, the MR physicist is generally expected to have Health and Care Professions Council (HCPC) registration as a Clinical Scientist.                                                                                                                                                                       |
| Supporting clinical services where relevant (e.g. anaesthetics, radiologists where biopsies/other interventional procedures are planned, cardiac physiologists where reprogramming of implanted devices is required) | Provide details on requirements for supporting clinical services into the design.                                                                                                                                                                                                                                                                                                                                                           |
| PACS manager, IT personnel                                                                                                                                                                                           | To ensure any new facility meets the need of the users in communication, data management and security, access to PACS and other relevant systems.                                                                                                                                                                                                                                                                                           |
| MR manufacturer                                                                                                                                                                                                      | Although the formal tender process may not start until the end of the design phase once the full business case (FBC) has been approved, MR manufacturers will often be able to provide valuable support at this phase of a project and their engagement is recommended as early as possible. A pre-contract services agreement (PCSA) should be considered if required.<br><br>Some MR manufacturers may also offer formal design services. |
| RF cage manufacturer                                                                                                                                                                                                 | Input into the design regarding options for the RF cage and MR Examination room door. They may also provide advice regarding magnetic shielding if required.                                                                                                                                                                                                                                                                                |
| Magnetic shielding experts                                                                                                                                                                                           | Provision of advice regarding magnetic shielding.                                                                                                                                                                                                                                                                                                                                                                                           |

Table 2. Key individuals/groups in the context of MRI that should be considered as part of the design team for new MRI installations.

It is important that the design team includes representation from all the different clinical groups that are intended to use the space, and their approval on the final design should be confirmed prior to

the start of the build phase. For example, if the project brief includes scope for MRI under general anaesthesia, it is important to ensure appropriate provision and location of medical gases and other required items. Additionally, it is important to ensure there is sufficient space to safely perform anaesthetic cases.

Before design work commences, the design team should have been provided with the 'golden thread' building information (e.g. power supply, water supply, structural information, fire safety information, etc) to satisfy Building Safety Act.

Ultimately, the design team should confirm the final design meets the project brief.

**Real-world example: insufficient consultation and signoff by anaesthetists on the design of new MR suite**

Anaesthetists were not fully consulted on the design of a new MRI installation to allow provision of anaesthetic cases resulting in insufficient space for induction/recovery to safely perform anaesthetic cases. There was no appropriate sign-off on the design from the local anaesthetic team.

**Impact: No anaesthetic MRI cases were performed during lifetime of the MR system (10 years+).**


**Real-world example: Multiple examples of issues concerning MR safety and image quality, all of which were associated with a lack of an [MR Safety Expert](#) in the design team.**

- The [MR Controlled Access Area](#) and access controls were not implemented for a relocatable MR suite. When the issue was realised, access controls could not be installed due to the construction of the unit, so an additional door had to be installed at the end of a new link corridor.
- The [MR Controlled Access Area](#) and access controls were not implemented for a new MR suite, with general public access into the area immediately outside the MR Examination room. A stable door was subsequently installed, but access control recognised to still be non-ideal.
- Impact of moving vehicles parking adjacent to scanner was not considered during planning. Bollards to restrict adjacent vehicle access were retrospectively installed.
- Appropriate MR safety notices not considered.
- Lack of local MR safety policies and procedures.

**Impact: additional cost to the hospital, impaired quality of service, compromised safety and delays to clinical use**

### 3.3 MR suite layout and general design

The layout of the overall MR suite should provide an efficient and patient-friendly experience that enhances patient, staff, visitor and public safety. Figure 4 shows an example functional workflow for patients within the MR suite. Examples of the functional relationship between different rooms and areas provided in the [HBN 06-01](#) guidelines. These include an example of an MR suite supporting both outpatients and inpatient, including scope for anaesthetic cases, and an example of an MR suite in a hospital outpatient or community setting, without anaesthetics.

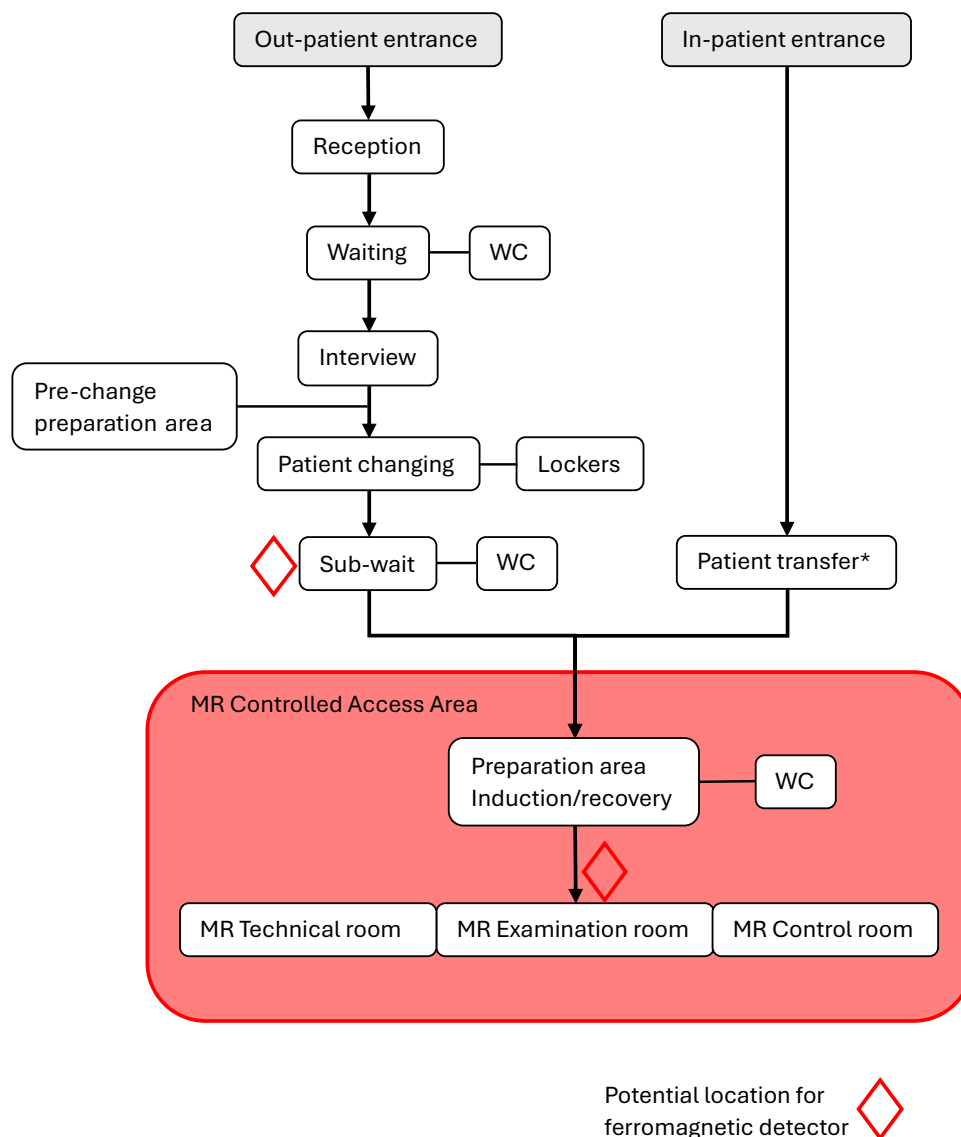

\*patient transfer may occur inside the [MR Controlled Access Area](#) for some designs.

Figure 4. Example MRI functional workflow diagram for the flow of patients within the MR suite. After the MRI examination, patients may spend some time within a recovery area before returning to the patient changing (outpatients) or patient transfer area.

General design options to make the space more patient-friendly should be considered. This is particularly key if looking to accommodate paediatric patients. Consideration should be given to the use of themes, murals, and natural imagery in the general decoration. Patient accessibility options should be considered in line with [HBN 00-01](#).

General MR safety aspects that should be considered in the design include the following.

- Ensuring that persons with implanted/attached medical devices and other foreign bodies do not enter the [MR Environment](#) without prior safety checks and authorisation by MR staff.

- Ensuring that any other items whose function could be adversely affected by the strong static magnetic field are either kept out of the [MR Environment](#) or are permitted only according to all specified conditions.
- Ensuring that ferromagnetic items such as wheelchairs, trolleys, oxygen cylinders, scissors etc are not taken into the [MR Environment](#) where they could become projectiles.

Additionally, more general safety aspects that are applicable to projects beyond MR installations should be considered, e.g. fire alarms and evacuation routes, patient alarms in non-supervised areas (e.g. changing rooms), how MR staff can call for assistance if required.

Specific rooms/areas within the MR suite that need to be considered are discussed further in subsequent sections.

### 3.3.1 MR Controlled Access Area

One of the important early considerations when designing an MR suite is the designation of the MR Controlled Access Area, the area which encompasses the [MR Environment](#) and to which access is controlled by suitable methods. This is illustrated previously in Figure 1 showing an example layout of an MR suite. The use of RFID-based ID badge access control allows individuals to be added/removed as required. Combination-based locks are generally discouraged as combination codes tend to become more widely distributed than originally intended. Continuous access control is important to mitigate the typically permanent risks associated with ferromagnetic objects and anyone with implanted/attached medical devices/foreign bodies who has not been MR safety screened and approved. Consideration should be given to what should happen with regards access controls in the event of exceptional situations, such as a fire alarm or power failure. Any patient alarms activated within the [MR Controlled Access Area](#) should be managed by supervising clinical staff within the [MR Controlled Access Area](#). Consequently, these patient alarms are not expected to impact on these access controls.

All individuals, including patients, staff, and visitors, should undergo MR safety screening prior to entering the [MR Controlled Access Area](#), regardless of whether they plan to enter the [MR Environment](#) itself. It is advisable to limit the [MR Controlled Access Area](#) to be the minimum space required for controlling access to the [MR Environment](#). This will assist MR Authorised staff to supervise the area and reduce the amount of screening that needs to be performed. Typically, the MR Controlled Access Area includes the MR Examination room, the MR Control Room and the areas immediately adjacent to the entrance of the MR Examination room that commonly accommodate patient preparation and recovery.

Ideally, all patient and staff entry points to the [MR Controlled Access Area](#) should incorporate self-closing, self-locking doors, although access and exit should be immediately available in the event of a power outage. Each entry to the [MR Controlled Access Area](#) should have warning signs on display. IPEM offer freely available MRI warning signage templates ([IPEM 2017](#)) that include examples for entry points to the [MR Controlled Access Area](#) such as that shown in Figure 5.



Figure 5. [MR Controlled Access Area](#) signage from the IPEM MRI warning signage templates.

To help with control of access, the number of entry points to the [MR Controlled Access Area](#) should be minimised. Similarly, designs where the [MR Controlled Access Area](#) could be used as a “short-cut” route to non-MRI related locations and as an emergency exit route, should be avoided.

For some MR suites it may be preferable to share areas outside of the [MR Controlled Access Area](#) with other modalities, e.g. shared reception, changing rooms, sub-wait. Ideally, all areas within the [MR Controlled Access Area](#) should be dedicated to MR to avoid MR safety screening of persons for non-MR activities and to help with control of access to the [MR Environment](#).

**Real-world example: design of MR suite did not provide any ability to define an [MR Controlled Access Area](#).**

Problems with a lack of a defined [MR Controlled Access Area](#) were not identified until after the build had started. An [MR Safety Expert](#) was not involved in the initial planning of the MR suite.

**Impact: delays while stud wall removed, additional steel shielding put in place and stud wall replaced.**

### 3.3.2 Fire

Communication with the local fire safety team is strongly encouraged to ensure they are fully aware of hazards that will be important to feed into appropriate fire risk assessments for the design and subsequently for the installation and subsequent use of the MR system suite.

It is critical to understand that typically the MR Examination room, MR Technical room and MR Control room form part of the functional MR system and should be considered as a single fire zone. Consequently, the separating walls, including the RF cage, RF window and MR Examination room door, are not intended to provide any fire protection. Furthermore, the use of any fire-stopping material between these rooms will not have been tested or certified for compatibility with the cables, pipes, fibreoptics, and other interconnecting parts of the MR system, especially with regards to the potential impact it may have on them or the RF shielding capability. Consequently, any introduction of such materials would constitute a modification of the medical device, which can void the product conformity, i.e. it would no longer be authorised for medical use.

**Real-world example: local decision did not recognise MR Examination room, MR Technical room and MR Control room as a single fire zone.**

Local decision to incorporate fire-stopping material in the conduits between the MR Technical room, MR Examination room, and MR Control room.

**Impact: this constituted a modification of the medical device that was unauthorised by the MR manufacturer and impacted the product conformity.**

Two example layouts for fire compartmentalisation are shown below in Figure 6.

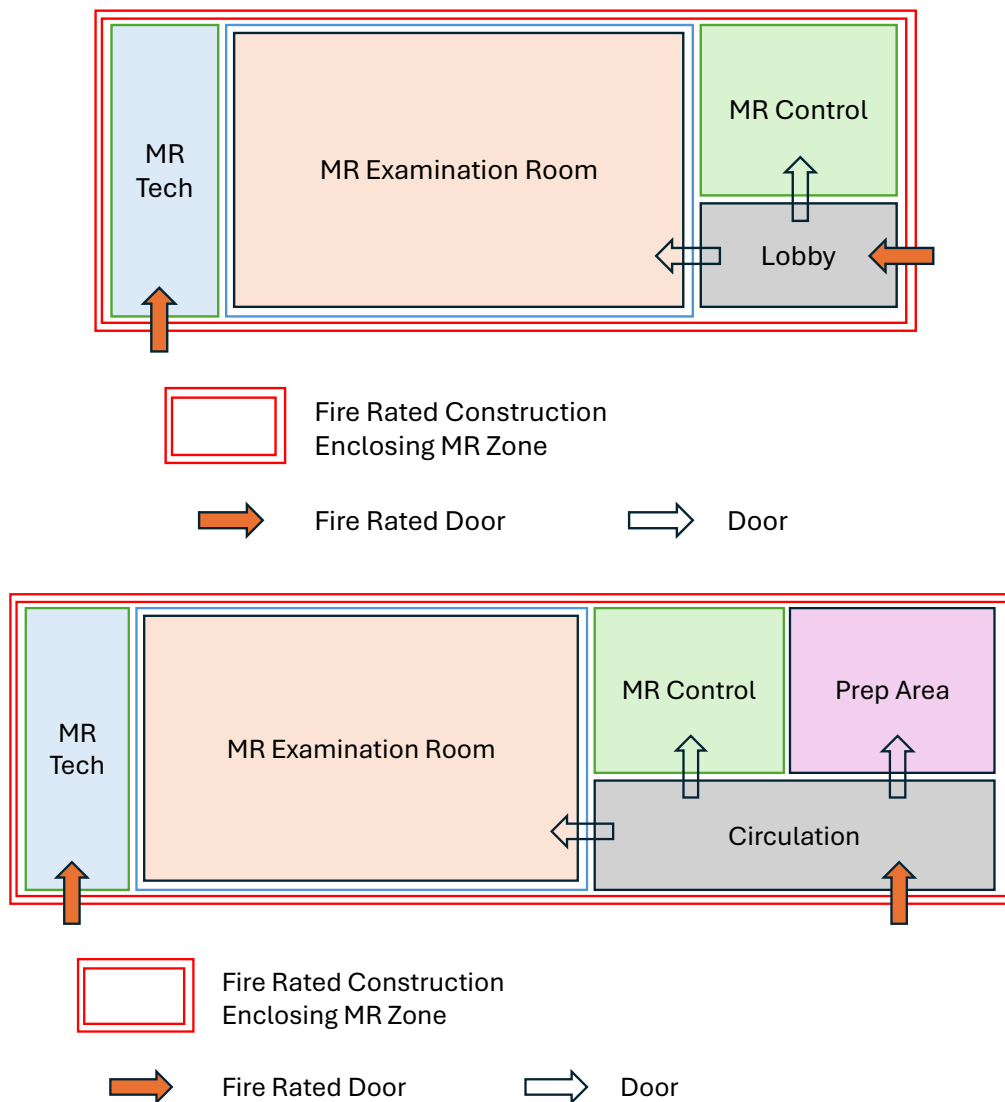


Figure 6. Two example layouts for fire compartmentalisation.

Some MR manufacturers incorporate sensitive smoke detectors within the MR system to automatically switch off power to certain components of the MR scanner. The installation of a more general-purpose smoke detector within the MR Examination room requires an appropriate connection through an RF filter panel, but this is often avoided in practice by incorporating a smoke detector within the air extract duct, outside of the RF cage.

How a general fire alarm in the hospital will impact on an electronic access control system for the [MR Controlled Access Area](#) should be identified and if required, subsequent mitigations for maintaining access control should be considered.

It is important that any fire extinguishers that are intended for use within the MR Examination room are non-ferromagnetic. It is encouraged to plan for non-ferromagnetic fire extinguishers throughout the [MR Controlled Access Area](#) or the whole MR suite to mitigate for the possibility that any of them may be used in the event of a fire in the MR Examination room. Fire extinguishers are examples of items that are not medical devices and subsequently may not have undergone MR safety testing and therefore do not have standard MR safety labelling provided by the manufacturer. Local testing and



MR safety labelling is encouraged to ensure consistency of [MR Safe](#)/[MR Conditional](#)/[MR Unsafe](#) labelling of any item that may be brought into the [MR Environment](#).

Currently, it is uncommon to install fire sprinkler systems in MR suites, although it is recognised that non-ferromagnetic water sprinkler systems intended for use within MR Examination rooms are available. Any installation of a sprinkler system in an MR suite should be a local decision, recognising that if activated, medical device certification requirements would require the affected medical device parts or the whole system to be replaced, at cost to the site. Further discussion on the planning of sprinkler system in the MR Examination room is discussed in the [RF cage](#) section of this guidance.

More general recommendations and guidance for the management of fire safety in healthcare buildings are provided by the HTM 05 suite of documents ([HTM 05-01](#), [HTM 05-02](#), [HTM 05-03](#))

### 3.3.3 Delivery route

Consideration of how any existing MR scanner will be removed and a new MR system delivered should be part of the design. MR scanners can vary significantly in weight and physical size (for details check site planning guides), and it is important that the entire proposed delivery route should be validated for adequate width, height, turning radii, and structural capacity. Additionally, consideration should be given to maintaining an on-going route for the removal of the MR scanner when it reaches end-of-life, and the delivery of a replacement MR system.

### 3.4 Specific rooms/areas within the MR suite

The following rooms/areas are described in a rough chronological order of an example outpatient's journey through the MR suite. [HBN 06-01](#) offers more general guidance, including recommendation on room sizes and example room data sheets.

Additional rooms within the MR suite (ideally outside of the [MR Controlled Access Area](#)) may be included within the design to support MR-related activities such as vetting, reporting, physics support. Alternatively, these activities may be accommodated outside of the MR suite.

#### 3.4.1 Reception and waiting area

##### *Function*

Initial arrival point for outpatients. After their attendance is recorded, outpatients will typically wait in this area before being called through to next stage. Patients may be asked to read and complete an MR safety screening form while in the waiting area, although this is dependent on local practice and it is recognised that some patients may have had an opportunity to do this prior to attendance.

##### *Location*

The reception and waiting room should be outside the [MR Controlled Access Area](#). It may be an area that is dedicated to MR only or a shared waiting room for multiple modalities. Ideally, it should be adjacent to reception bays/check in areas, toilets and an interview room for MR staff to verify with the patient information given on the screening form.

##### *Operational/design considerations*

The reception may be multi-service / multi-modality or dedicated to MRI only. There should be sufficient space to accommodate the expected number of patients, various individuals who may accompany a patient and other visitors. Persons accompanying the patient may need to remain here, outside of the [MR Controlled Access Area](#), while the patient undergoes their MRI scan. The space may need to support inpatients as well as outpatients. Additionally, it may need to support paediatric patients.

Considerations for the sub-waiting area, described later in this guidance, will be relevant to consider here if a separate sub-waiting area is not included in the design.

### 3.4.2 Pre-change preparation area

#### *Function*

To support certain patient groups, particularly paediatric patients, by providing tools such as a toy/mock MR scanner to simulate the MRI examination and increase the patient's familiarity with the MRI experience. This can be particularly helpful for increasing patient cooperation during the MRI exam, which can be important for optimum image quality. In some cases, this can avoid the need for general anaesthesia. A number of publications have highlighted the impact of play simulation in increasing the proportion of paediatric patients who are able to undergo MRI without general anaesthesia ([Carter et al. 2010](#), [Heales & Lloyd 2022](#), [Anwar et al. 2022](#)). One example of a toy MR scanner, was reported to save a hospital £150,000 in sedation and care costs ([BBC 2025](#)). Additionally, virtual reality experiences that simulate the patient journey in MRI have also proven very useful in a paediatric setting ([Stunden et al. 2021](#), [Harrington et al. 2022](#)). This area may also function as the waiting area for paediatric patients.

This area may also serve as a separate quiet room to support highly anxious or neurodivergent patients. Having areas that are calming can aid patient compliance for a scan.

Additionally, a pre-change preparation area may provide a space with privacy for baby feeding, either prior to feed and wrap neonatal MR examinations or more generally.

This location may also be a suitable location for the programming of some medical devices prior to the patient's MRI scan, e.g. CIED programming, or neurostimulator impedance checks, if appropriate prior to patient changing.

#### *Location*

Generally, outside of the [MR Controlled Access Area](#).

#### *Operational/design considerations*

Accommodate space for a play specialist, as well as space for the patient's parents/carers.

### 3.4.3 Patient screening areas / interview room

#### *Function*

A private area/room for MR staff to discuss/confirm with patients, the information declared on the patient screening form or to follow up on information. This personal information may be of a sensitive and confidential nature, and so an area that provides appropriate auditory and visual privacy is important to help encourage full disclosure of any implants and other potential issues that may impact on the safety and quality of the MRI scan.

#### *Location*

This should ideally be outside the [MR Controlled Access Area](#), between the reception/initial waiting area and the patient changing area.

#### *Operational/design considerations*

Consideration should be given to supporting electronic patient screening, e.g. availability of power and IT connections.

#### 3.4.4 Patient transfer area

##### *Function*

To transfer patients who arrive in/on standard wheelchairs or patient trolleys onto [MR Conditional](#) wheelchairs/patient trolleys/dockable MR scanner table.

##### *Location*

The patient transfer area may be located inside or outside of the [MR Controlled Access Area](#). From an MR safety point of view, the latter option is ideal to avoid the introduction of ferromagnetic objects into the [MR Controlled Access Area](#). Additionally, this allows for non-MRI staff (e.g. porters, ward staff, and carers) to assist with patient transfers without needing to perform MRI screening for them to enter the [MR Controlled Access Area](#). However, it is recognised that the location of the patient transfer area also has implications for staffing, patient monitoring, space planning, equipment logistics, overall workflow and cost. The views of the lead MR radiographer and any supporting clinical services (e.g. anaesthetics) are likely to be key to considering all these aspects. Overall, a local preference may be to locate the patient transfer area within the [MR Controlled Access Area](#), which is often considered to support a smoother workflow, and rely on procedural controls and staff vigilance to maintain MR safety. In this case, particular vigilance is required in emergency situations.

##### *Operational/design aspects*

Where the patient transfer area is to be located within the [MR Controlled Access Area](#), maximising the physical separation from the MR Examination room is strongly advised to provide some additional MR safety buffer. Additionally, options for a retractable belt barrier or swinging door barrier at the entrance to the MR Examination room should be considered, along with clear warning signs.

Where the patient transfer area is to be located outside of the [MR Controlled Access Area](#), consideration should be given to additional staffing or coordination with other clinical teams to ensure patients receive appropriate supervision. In some cases it may be appropriate for patients in the patient transfer area to be supervised by non-MRI clinical staff, potentially as part of a more general radiology patient transfer area. Additionally, consideration should be given to the security of [MR Conditional](#) trolleys, wheelchairs or dockable scanner tables to avoid them being inadvertently removed from the MR suite.

The transfer area should be able to accommodate the full size range (e.g. spinal, ITU, bariatric) of beds, space to pass safely, trolleys, staff, and circulation routes while maintaining MR safety zoning and controlled access. Ceiling suspended hoists may be a useful addition. Additionally, consideration should be given to where items that may come with the patient will be parked so as not to impede other patient transfers.

**Real-world example: Long legs/base frame of a mobile hoist did not fit under the dockable MR table or [MR Conditional](#) trolley**

Patients had to be transferred from their wheelchair to a standard [MR Unlabelled](#) trolley and subsequently from the [MR Unlabelled](#) trolley to the dockable table.

**Impact: Additional time to perform patient transfer with more manual handling for MR staff.**

Consideration should be given to incorporating a hand-held ferromagnetic detector to support the MR safety screening of these patients.

### 3.4.5 Patient changing rooms

#### *Function*

The function of this area is for patients to be able to change from their own clothes into [MR Safe](#) clothing (e.g. scrubs or gowns) that ideally are pocketless. This helps to ensure that there are no conductive fibres or other components within clothing (that have implications for safety and MR image artefact) and that no personal items (e.g. watches, jewellery, wallets, phones) are brought into the MR Examination room.

#### *Location*

Ideally, the patient changing area should be located outside of the [MR Controlled Access Area](#) for the following reasons.

- Personal items and other objects that may be unsafe to take into the [MR Environment](#) are kept outside of the [MR Controlled Access Area](#), reducing the likelihood of them being inadvertently taken into the MR Examination room.
- Reduced activity within the [MR Controlled Access Area](#) which reduces the risk of inadvertent access.

#### *Operational/design aspects*

Patients will usually be coming from safety screening to the changing area and then moving on to either a sub-wait, preparation room or directly to the MR Examination room.

Once the patient has changed clothes, the next workflow step may be one of the following.

- The patient is taken straight through to the patient preparation area for scan preparation
- The patient is taken straight through to the MR Examination room for their scan if no preparation is required.
- The patient waits in the changing room. Careful consideration of this option should be made regarding the impact on overall patient throughput, as other patients cannot get ready for their scan.
- The patient waits in a post-change sub-waiting area.

The number of changing rooms should be able to accommodate the planned patient throughput. This should include consideration of the patient population, recognizing that some may require more time to change than others. Additionally, to avoid this becoming a workflow bottleneck it is important to consider potential future increases in patient throughput as well ongoing developments in MR technology to reduce exam times. Standard options for patient changing rooms should be considered, such as provision for patients in wheelchairs, a nurse call, ability to unlock and open the door outwards in the event of an emergency.

Secure storage space, e.g. lockers, should be available close to the changing area to allow patients to store their clothes and personal items while they are within the [MR Controlled Access Area](#). Local sites should consider how they wish to manage placement of patient locker keys while the patient is undergoing their MRI scan. It may be reassuring for the patient for their locker key to stay within the MR Examination room during their scan, in which case it is helpful to consider options for non-ferromagnetic keys, such as aluminium or brass (additionally recognising that softer metals such as brass may be less robust to physical wear and tear), or non-metal options such as RFIDs. Provision for master key to be held in a secure location if needed is recommended.

There should be sufficient storage space close to the changing rooms for both clean and used [MR Safe](#) clothing.

Supervision of patients should be considered. For outpatients it may be acceptable for the patients to be unattended until they are ready for their scan. Inpatients may have different needs and may need closer supervision.

#### 3.4.6 Post-change sub-waiting area

##### *Function*

This functions as a secondary waiting area for patients who have been MR safety screened and have changed into [MR Safe](#) clothing. This may be helpful to separate these patients from those in the general waiting area who have not yet undergone MR screening and changed into [MR Safe](#) clothing.

For some patients, the sub-waiting area may also function as a location where they drink an oral preparation prior to their MRI scan.

##### *Location*

Ideally, the sub-waiting area should be located outside of the [MR Controlled Access Area](#) to help reduce the patient's time within the [MR Controlled Access Area](#) and the associated level of supervision by MR staff that is required. In some cases, the initial waiting area may also serve as the sub-waiting area.

The sub-waiting may be adjacent to the entrance to the [MR Controlled Access Area](#) and the preparation area within, as this follows the patient pathway and it is more efficient for staff. It should be close to the patient changing rooms.

##### *Operational/design considerations*

If a separate sub-waiting area is not included in the design then the considerations highlighted below should form part of the section for the patient waiting area.

Access to toilets within/close to the sub-wait area should be considered, particularly if intended MRI service includes examinations that may necessitate patients emptying their bladder/bowels before/immediately after their scan.

The area should have space for patients in wheelchairs.

Ferromagnetic detection systems are intended as ancillary screening devices and are not intended to be used as a replacement for traditional safety programmes, training or primary screening methods but as a complementary tool. If a local decision is made to install a ferromagnetic detection system, then the sub-waiting area is one location where this can be located. Here, it can serve as an additional check for any ferromagnetic items before taking a person into the [MR Controlled Access Area](#). An alternative location for a ferromagnetic detection system is at the MR Examination room door, where it can help support a check for ferromagnetic items as a person enters the MR Examination room. Local MR staff will likely be best placed to define the optimum location based on established work procedures and planned patient workflows. A key point to consider is the scope for alarm fatigue, where MR staff become desensitised to the alarm as a result of frequent alarm alerts. Advice from other users of ferromagnetic detection systems and the providers of such systems may be helpful to avoid alarm fatigue.

### 3.4.7 Patient preparation area

#### *Function*

The primary purpose of this area is the final preparation of the patient before they enter the MR Examination room. This will include functions such as cannula insertion, but may also include sedation / anaesthetic induction.

If there is no separate recovery area then the patient preparation area will also function as a location for the patient to recover after their MRI exam. This may include any patients having drug reactions, e.g. to MRI contrast media. Additionally, the area may need to provide a location for the crash team to come to perform emergency resuscitation procedures, outside of the [MR Environment](#).

If there is no dedicated patient transfer space outside of the [MR Controlled Access Area](#) then the preparation area may also need to provide a space for transfers to take place from standard equipment that is typically unsafe for MRI to [MR Safe/MR Conditional](#) alternatives. Such equipment may include wheelchairs, hospital bed, patient monitoring, infusion pumps, anaesthetic machine and oxygen cylinders. Additionally, the space may then provide a location for the MR safety screening of inpatients. Finally, the space may need to act as a 'holding area' whilst an inpatient is waiting to return to the ward.

This location may also be a suitable location for the programming of medical devices prior to the patient's MRI scan, e.g. CIED programming, or neurostimulator impedance checks, when not performed in a pre-change preparation area.

#### *Location*

The preparation area is typically located within the [MR Controlled Access Area](#), near to the MR Examination room, as it usually forms the step in the patient pathway immediately pre/post MRI scan.

#### *Operational/design considerations*

The area should include space to support a sufficient number of cannulation chairs. The size of the area and its position in relation to the MR Examination room door should allow for easy manoeuvring of an [MR Conditional](#) trolley or dockable MR table in/out of the MR Examination room. Even if the site is planning only to scan ambulatory outpatients, this may be relevant to support safe evacuation of patients from the MR Examination room when required.

If the preparation area is located within the [MR Controlled Access Area](#) then the need for MR staff to provide continuous MR safety supervision of patients within the preparation area needs to be considered. Additionally, some patients within the preparation area may require a level of medical supervision by MR staff. Having the preparation area observable from the MR Control room may be helpful to support this.

When considering access and size especially with respect to anaesthetic cases, any room used for anaesthetic induction may need to be able to accommodate:

- Anaesthetic equipment, e.g. anaesthetic machine.
- A standard bed or trolley as [MR Conditional](#) trolleys may not meet the requirements for anaesthesia (e.g. they do not tip head down).
- Space for parents/guardians of children or carers of patients with learning disabilities who may need to be able to come into the preparation room for anaesthetic induction.

- Provision of additional procedures (e.g. dental care for patients with severe learning disabilities, lumbar punctures/biopsies) which may require additional room for staff and equipment to carry out these procedures.
- Space for access to resuscitation and difficult airway equipment.
- Lockable drug cupboards.

Provision of medical gases may be required. If anaesthetic cases are planned, input into the design of the preparation area from the local anaesthetic team and eventual sign off is strongly recommended. More detailed guidance on medical gas pipeline systems is provided in [HTM 02-01](#).

To help with control of access, accommodating an additional WC within the [MR Controlled Access Area](#) may be helpful to avoid MR safety screened patients, visitors and staff having to temporarily exit the [MR Controlled Access Area](#).



### 3.4.8 MR Examination room

It is particularly important to ensure the design of the MR Examination room is as complete as possible since subsequent changes may require the magnet to be temporarily ramped down, which is both costly and extends MR scanner downtime.

For replacement MR systems, the design requirements will depend on the level of alterations that are planned. However, even with minimal changes, it is important that MR staff are fully engaged in the design process to help ensure that important details are not missed.

#### **Real-world example: reinstallation of anaesthetic gases was missed when new RF cage was installed as part of a replacement MRI installation**

It was wrongly assumed that the existing provision of anaesthetic gases would be reinstated when a new RF cage was installed as part of a replacement MRI project.

**Impact: Initial MRI anaesthetic cases delayed by several weeks. MR scanner was down for one day to retrofit anaesthetic gases with additional cost to the hospital.**

#### *Function*

The MR Examination room is where MR scanning occurs, but this may also include different aspects depending on the MRI services that are to be provided. This may include the following.

- Administration of MRI contrast agent and other drugs
- Interventional activities (e.g. biopsy)
- Transfer of the patient onto and off the scanner couch.

In addition to the MR scanner, the room may need to accommodate various other equipment depending on the particular MRI services that are to be provided.

#### *Location*

The MR Examination room is located next to the MR Control room and typically immediately adjacent to the MR Technical room and patient preparation/recovery area. The MR Examination room is part of the [MR Environment](#), and is therefore located within the [MR Controlled Access Area](#).

The entrance and approaches to the MR Examination room will ideally be visible from the MR Control room. This is to allow MR staff within the MR Control room to observe whether anyone is unexpectedly attempting to access the MR Examination room. Similarly, incorporating some distance in the design between the entrance to the MR Examination room and entrance to the [MR Controlled Access Area](#) is desirable to help to mitigate the risk of an unauthorised person entering the MR Examination room if they manage to gain access to the [MR Controlled Access Area](#), e.g. via tailgating another individual.

Importantly, the MR Examination room needs to be located such that the position of the MR scanner within the room meets the MR manufacturer's specification regarding minimum distances from the isocentre of the MR scanner to various items that may negatively impact MR quality, which may include the following.

- Steel within the building, e.g. structural beams
- High-voltage power cables
- Other MR systems. In general, designs where multiple MR scanners are orientated in parallel provides scope for minimum separation distances.
- Large moving ferromagnetic objects, e.g. motor vehicles, lifts

Additionally, the potential for neighbouring equipment sensitive to magnetic fields, e.g. gamma cameras, to be adversely impacted from the MRI fringe magnetic field should be considered.

### *Operational/design considerations*

The MR Examination room should be large enough, and arranged appropriately, to enable safe and efficient transfer of all patients—including those walking or arriving on [MR Conditional](#) beds, trolleys, or wheelchairs—both into the room and onto/off the MR scanner table. The room layout, entrance location, and scanner orientation should all facilitate smooth patient flow and allow for rapid patient evacuation in the event of an emergency. A slightly rotated or offset position of the MR scanner within the room may be helpful to provide greater space on the anticipated patient transfer side of the MRI patient table.

Space should also be sufficient for transferring any [MR Conditional](#) equipment intended to enter the room, such as an anaesthetic machine or power injector. While manufacturers may provide minimum room-size specifications, these often focus solely on accommodating their scanner and associated hardware. It is therefore essential to consider broader clinical requirements, emergency planning, and the specific MRI services to be delivered when determining the appropriate room size. Storage and operational space for emergency evacuation equipment (e.g., evacuation trolleys) should also be planned within the room layout.

Furthermore, consideration should be given to any additional equipment that will be required temporarily/permanently within the MR Examination room to support the intended MR services.

This equipment may include the following.

- [MR Conditional](#) power injector
- [MR Conditional](#) anaesthetic machine
- [MR Conditional](#) patient monitoring
- [MR Conditional](#) ventilator
- [MR Conditional](#) infusion pump(s)
- [MR Conditional](#) patient video system
- Additional equipment not included as standard e.g. display units for fMRI visual stimulation
- MR-guided biopsy equipment
- Specialised MR procedures e.g. MR-guided focused ultrasound.
- Radiotherapy planning lasers

A three-level classification, based on patient acuity and levels of sedation and/or intervention, that is suggested for radiological imaging suites in the US ([US Department of Veterans Affairs, 2026](#)), may be helpful to guide aspects of the design of the MR Examination room.

[HBN 06-01](#) has general recommendations about scanner positioning to allow clear views along the magnet bore, MR Examination room door location, provision of area next to the table for patient transfer, provision of a relaxing and distracting patient environment, fixtures and fittings, soundproofing, minimum room sizes. It also recommends that it is adjacent to the MR Control room and MR Technical room.

#### **Real-world example: insufficient space at the rear of the MR scanner to allow the MR table to move out to full extent**


Design did not account for extended MR tabletop motion that was provided for whole body MR applications.

**Impact: MR scanner had limited scope to perform whole-body MRI studies for the duration of the MR system (10 years+).**

### Anti-vibration pads

Even if building vibration levels are within limits at the time of installation, incorporating use of anti-vibration pads helps to mitigate for future vibration problems that might arise from the nearby installation of other equipment during the lifetime of the MR system. Additionally, anti-vibration pads may help to reduce the acoustic impact from the MR scanner to neighbouring areas via structure-borne noise transmission. MR manufacturers typically provide specifications for anti-vibration pads to be used for their systems.

#### Real-world example: new plant equipment installed close to MR suite creating vibrations that exceeded MR manufacturer's specifications

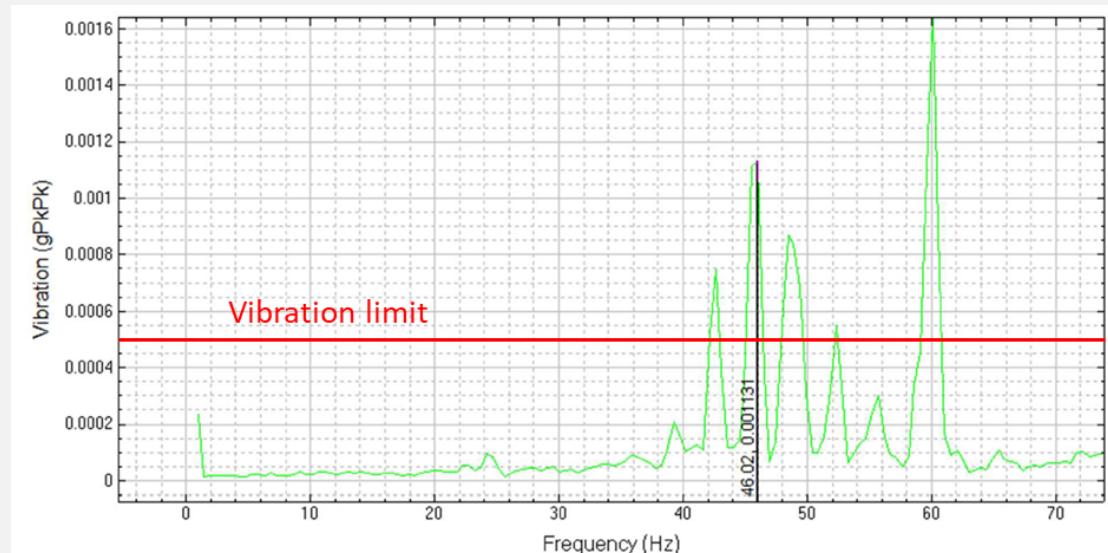

The vibration created by the equipment exceeded the specification limit defined by the MR manufacturer.

**Impact: No adverse impact, potentially because the MR scanner was installed on anti-vibration pads.**

### RF cage

Typically, the MR Examination room needs to be enclosed within an RF cage (also known as a Faraday cage or RF cabin) to shield the MR scanner from external radiofrequency signals originating from outside the MR Examination room that can otherwise impact on image quality. The RF cage also serves to attenuate the RF signals emitted by the MR scanner being transmitted beyond the MR Examination room. The MR manufacturer will specify the required shielding effectiveness. Typically, this is between 90-100 dB at several specified radiofrequencies. If scope for multi-nuclear MR systems is to be included, then consideration of testing at additional relevant frequencies may be appropriate, particularly after all installation work has completed.

#### Real-world example: Equipment producing RF interference at 31P frequencies

A third-party piece of equipment that was intended to be used in conjunction with MR systems was found to produce RF interference at 31P frequencies at 3T.

**Impact: The screen was not used during 31P-MR exams, preventing the acquisition of some planned studies.**

It is important that all requirements from the RF cage manufacturer are incorporated into the design. Typical requirements for the concrete slab supporting the RF cage include the following

- **Recess.** It is often important to ensure a consistent floor level between the MR Examination room and immediately outside the room, recognising that even relatively small physical bumps can be unacceptable for wheeling certain patients in/out of the MR Examination room. To achieve this, the concrete slab underneath the RF cage should be cast/scabbled to accommodate the cross-section of the RF cage and the MR Examination room door, as specified by the RF cage manufacturer. Alternatively, feathering of the floor immediately outside of the MR Examination room to raise the height as it approaches the MR Examination room may be possible, although subsequent implications of a non-level floor for patient trolleys and other wheeled equipment should be considered.
- **Flatness.** Typically, RF cage manufacturers have requirements on the flatness of the concrete slab that are often stricter than many other building projects. Additional self-levelling compound may be required to meet the required specification.
- **Dryness.** Prior to installing the RF cage, the concrete slab should be sufficiently cured to support the weight of the MR scanner, since the first step of the RF cage build often involves laying down a moisture barrier that may restrict further drying of the slab.

**Real-world example: change in floor level when entering the MR Examination room door**

The change in floor level caused a “bump” when wheeling patients in/out of the MR Examination room that was significantly problematic for patients with spinal problems.

**Impact: A slope to avoid bump was retrofitted at additional expense and time**

**Real-world example: slab recess level for the RF cage did not take into account the MR Examination room door frame**

While the floor of the MR Examination room was equal to the floor level outside, the reduction in the slab level did not extend to the MR Examination room door, resulting in a sizeable change in level at the door threshold.

**Impact: A slope to avoid bump was retrofitted at additional expense and time**

Some aspects of the RF cage design are specific to the make and model of MR scanner which is to be installed. Examples of this include the penetration panel and floor anchoring points. Consequently, delaying the build of the RF cage until selection of the MR system helps to avoid separate follow up work on the RF cage. Additionally, it is helpful to consider the impact of concurrent building activity when scheduling the RF cage build. Delivery of the RF cage materials before the project is ready may result in additional challenges for the secure storage of materials and an increased risk of damage.

Different materials can be used for the RF cage, with copper, aluminium and steel being the main examples. Copper has an advantage over aluminium and steel of being able to adapt on site to any unexpected deviations from plans. Additionally, it may be helpful to support future adaptations to the RF cage. At the time of writing, at least one of the major MR manufacturers recommends the use of copper as the preferred material for the RF cage suggesting effectiveness, long term stability, design possibilities, manufacturing, customising and costs. RF cages made from aluminium require additional care during construction, particularly around doors and windows, to ensure sufficient electrical contact between panels due to the layer of aluminium oxide that may otherwise negatively impact on the level of RF attenuation. Steel is also an option for RF cages, although MR

manufacturers may specify additional requirements, such as the use of non-ferromagnetic material immediately underneath the MR scanner. Further details can be found in the MR manufacturers site planning guides.

**Real-world example: external wall was not sufficiently weatherproof before RF cage was built**

During a period of stormy weather water penetrated the building, came down internal walls and under the RF cage.

**Impact: The RF cage, along with the internal walls and floor, had to be replaced, resulting in a two-month project delay with associated significant costs for the hospital that included outsourcing of MRI scanning.**

Any electrically conducting connection through the RF cage (e.g. electrical supply for lighting, power sockets, network cable) needs to pass through an RF filter, while any non-electrically conducting connection can pass through a waveguide. There is scope to use media converters to modify conducting signalling cables, e.g. ethernet cabling, into non-electrically conducting fibre-optic cable, to allow it to pass through an RF waveguide. However, electrical filters for ethernet connections are also available. If general anaesthesia of patients is to be performed it is essential to install RF waveguides through the RF cage for suction, oxygen, medical air, anaesthetic gases and an anaesthetic gas scavenging system.

The location and dimensions of waveguides and the position of connections within the MR Examination room should be confirmed with the intended users. Wall-mounted service connections (e.g. electrical, optical fibre, ethernet, medical gases) in the MR Examination room should align with the intended equipment layout, ideally locating connection points immediately adjacent to where the equipment will be positioned when in use. For equipment requiring multiple connections (e.g. an [MR Conditional](#) anaesthetic machine) it is generally desirable to locate the required wall connection points close together. Trunking can be used to direct cabling/fibre from the position of filters/waveguides to connection points to minimise cabling/fibre across the floor. However, this may be undesirable in some cases, e.g. where minimal length of tubing between the patient and the anaesthetist in the MR Control room is required when performing artificial breath holds.

**Real-world example: Lack of fibre optic connection adjacent to the position of medical gases.**

The fibre optic cable from the [MR Conditional](#) anaesthetic machine had to pass along the floor of the MR Examination room to the waveguide on the other side of the room.

**Impact: Trip hazard, reduced increased risk of damage to optical fibre.**

The elevation of waveguides should also be considered, particularly into the MR Control room where it may be helpful to locate them both above and below the worktop to support a range of connections and minimise cable clutter.

**Real-world example: no waveguide between MR Examination room and MR Control room.**

A new MR suite was constructed without any waveguides between the MR Examination room and the MR Control room.

**Impact: impaired ability for optical fibre connections between MR Examination room and the MR Control room, e.g., for patient monitoring, power injector.**

Consideration should be given to waveguide solutions as part of the MR Examination room door (sometimes known as IV waveguides) that allow placement of critical care lines through a waveguide without needing to disconnect the lines from the patient each time they are moved in/out of the MR Examination room.

Larger diameter waveguides may be required, e.g. to allow projection of images/video from outside of the MR Examination room, or to allow smaller items to be passed in/out of the MR Examination room without needing to open the door.

**Real-world example: size of installed waveguide was insufficient for intended use**

Size of installed waveguide was found to be insufficient to allow pass through of items required for general anaesthetic cases.

**Impact: Wider waveguide was retrofitted at additional cost. 2 days downtime**

Although uncommon, if a local decision is made to install a fire sprinkler system within the MR Examination room then discussion with the RF cage manufacturer is advised to ensure the design does not compromise the RF cage performance, e.g. by having water-filled pipes permanently within waveguides that may provide a path for external RF interference to enter the MR Examination room. Non-ferromagnetic water sprinkler systems intended for use within MR Examination rooms are available.

A removable conducting plate within the RF cage, known as a penetration panel or filter panel, can be used to accommodate multiple RF filters/waveguides. Use of softer metals, such as brass, for the penetration panel can be helpful practically if there is a need to add additional connections in the penetration panel after it has been installed. Installation of a blank plate may be helpful as part of futureproofing.

A penetration panel will be installed for the MR manufacturer to make connections between the MR scanner and their equipment in the MR Technical room. Ideally, this MR system penetration panel should be dedicated to connections made by the MR manufacturer only. One or more additional penetration panels should be installed to support other connections into the RF cage that are not directly associated with the MR system. The distance between the MR system penetration panel and other penetration panels should meet any minimum distance requirements specified by the MR manufacturer. Additionally, a minimum clearance on both sides of the filter panel should be specified for servicing/future modifications. Ideally, penetration panels should be fitted such that any servicing/alteration to the panel occurs from the outside of the RF cage to avoid the need for servicing personnel and tools to enter the MR Examination room.

For projects planning to reutilise an existing RF cage, the MR manufacturer should be consulted with regards potential changes that they may require for the penetration panel.

Air ducts connect into the RF cage via separate honeycomb waveguides. The ceiling of the RF cage should incorporate a typically 600x600 mm honeycomb wave guide, providing an air connection from the MR Examination room to the void immediately above the RF cage that provides some ability for air pressure equalisation when the MR Examination room door is opened/closed.

To further avoid the potential for RF interference to be transmitted into the MR Examination room, it is important for the RF cage and all electrical items within it to be connected to a common electrical earth. The RF cage should be connected to a single RF common electrical ground stud which is also the earthing connection for the MR system power distribution unit supporting the

gradient and RF system cabinets in the MR Technical room. This ensures a common earth between all parts of the system. Typically, a separate equipotential bonding busbar (EBB), also known as an earthing busbar, is required for each MR system. Further details should be available in the MR manufacturer's site planning guide.

**Real-world example: Lack of single common earthing for new MR installation**

The electrical earth for power sockets inside the MR Examination room was initially connected to an equipotential bonding busbar (EPP) separate from that of the RF cage and MR system.

**Impact: Potential for RF interference on MR image quality**

To ensure electrical isolation between honeycomb waveguides in the RF cage and external air ducting, a non-conducting packing material, e.g. wood, should be used, as shown below in Figure 7. Mechanical vibration is known to be another potential source of RF interference. Consequently, a degree of mechanical isolation between the RF cage and any attached structures (e.g. ducting, pipes) is desirable to reduce the possibility of vibrations being transmitted onto and into the RF cage.



*Figure 7. Example of wooden frame providing electrical isolation between honeycomb waveguides in the RF cage and external air ducting.*

If an existing MR scanner is being replaced and it has been established in the pre-design phase that the performance of the existing RF cage is sufficient (perhaps with localised remedial work if required) then repurposing the existing RF cage can reduce costs. This option also provides scope to plan for the old MR scanner to be removed immediately prior to the delivery of the new MR system, utilising the same exit/delivery route including scaffolding, creation of MRI entry/exit panels, propping and ramps. It is important to note that there may be substantial delays and costs associated with a late decision to procure and install a new RF cage.



**Real-world example: An existing RF cage was initially considered to be sufficient for a replacement MRI installation, but the performance was subsequently found to be insufficient during the build phase of the project.**

A new RF cage was purchased and installed.

**Impact: Additional 3 weeks to project + additional £200K costs**

#### *MR Examination room door*

Unless there are other requirements, there is usually only a single door into and out of the MR Examination room. This should be lockable to prevent inadvertent access when the MR suite is unattended. However, this door should always be openable from within the MR Examination room.

The MR Examination room door should have clear signage indicating the hazards in the MR Examination room. Immediately outside of the MR Examination room door it is helpful to incorporate floor signage to highlight that the magnetic field is always on, and to consider the installation of a retractable belt barrier or swinging door barrier as additional warning prior to entering the MR Examination room. A mains-powered illuminated “The magnet is always on” sign with integrated battery backup may be placed above the MR Examination room door, linking in with similar signage outside imaging rooms utilising ionising radiation. However, there are also concerns that any lamp failure will wrongly give the impression that the hazard is no longer present. Any decision to utilise an illuminated sign should additionally consider appropriate preventative maintenance to avoid this possibility. Fluorescent signage may also be considered. Examples of some of these signs are shown below in Figure 8.







Figure 8. IPEM door and floor warning signs ([IPEM 2017](#)) and an example of both in practice, additionally demonstrating a second copy of signage on the inside of the door to maintain a visible warning sign when the door is open

For MR scanners with a quench pipe, in the unlikely event of both a magnet quench and a quench pipe failure, large amounts of helium gas will be emitted into the MR Examination room over a short period of time (typically 10s of seconds). This will greatly increase the room air pressure and subsequently prevent opening of the door if it opens inwards into the MR Examination room. An emergency air extract system, discussed later in the [Air Handling](#) section, is typically insufficient on its own to remove the large amounts of helium gas from a full quench for an MR system containing many 100s of litres of liquid helium in a timely manner to avoid room over-pressure and allow immediate access to the MR Examination room. Various mitigation options to consider for this scenario include the following.

- An outwardly opening, latch-free MR Examination room door. A latch-free design will open in the event of room over pressure without the need for the additional manual intervention. For latch-based outwardly opening doors there are practical and safety concerns for anyone attempting to open the MR Examination room door in this scenario since the room overpressure may already be significant. However, keeping a latch-free outwardly opening MR Examination room door closed during general use may present a challenge if there is a small room overpressure during normal operation.
- An outwardly opening hatch within the MR Examination room door or elsewhere within the wall of the RF cage.
- An alternative over-pressure relief mechanism.

The MR Examination room door is an integral part of the RF cage which significantly increases the weight of the door. Additionally, there is often a higher degree of friction when opening/closing the door as a result of the need to ensure a good contact between the door and the surrounding door to maintain the integrity of the RF cage. Consequently, consideration should be given to ways to aid

manual handling when opening/closing the MR Examination room door, both in the initial design and subsequently with regards ongoing maintenance during the use phase. Additionally, any door stops to prevent the MR Examination room door opening too far should be appropriately robust.

There have been several incidents where the locking mechanism on the MR Examination room door has failed, preventing MR staff from immediately accessing the patient ([Steckner et al. 2026](#)). Design teams are encouraged to consider and discuss this scenario with potential RF cage manufacturers, several of whom provide backup options to open the door in these situations. Design teams should consider further mitigation options, especially if no backup solution is available. These may include the following.

- A design where the door handle is physically separate from the door locking mechanism, thereby avoiding some of force applied to the handle potentially being transferred to the locking mechanism and increasing the likelihood of lock failure.
- A second door into the MR Examination room, providing an alternative entrance / exit. This has the potential disadvantage of requiring additional control measures to ensure no unauthorised access into the MR Examination room as well as increased expense (both initially, and for subsequent maintenance) and potentially increased space requirements. A possible solution to the additional control measures may be to access would be to require the second MR Examination room door to be locked at all times and only unlocked in an emergency situation.
- Installation of equipment and associated PPE within the MR Control room to break the window into the MR Examination room and cut through the RF mesh ([Steckner et al. 2026](#)).

#### Real-world example: MR Examination room door latch failure

A radiographer found the MR Examination room door would not open, preventing them from gaining access to the patient in the scanner. After various unsuccessful attempts were made to open the door, including the patient attempting to open the door from the inside, the fire rescue services were called in. A decision was made for them to



break and remove a window into the MR Examination room, through which the patient was rescued (see photo).

Fortunately, the patient was able to remove themselves from the MR scanner and stayed calm throughout the 3 hours before they were rescued.

Subsequently, the door manufacturer replaced the door with another that included a removable panel that allowed access to the door latch mechanism should a similar event occur (see photo). Additionally, they replaced the door latch with a roller-ball latch.



**Impact: 7 days of MR scanner downtime, about £20K cost to hospital**

### *Magnetic shielding*

In addition to RF shielding, there is scope to install high magnetic permeability metal shielding within the walls/floor/ceiling of the MR Examination room. Typically, the main objective for this magnetic shielding (sometimes described as passive shielding) is to limit the extent of the [B<sub>0</sub> Hazard Area](#) to the MR Examination room, particularly if the adjacent area is publicly accessible. Such shielding is often required for higher field MR systems, e.g. 3T, particularly if the building has a floor immediately below the MR scanner. Additionally, magnetic shielding can be used to reduce the likelihood of nearby large moving metal objects, such as motor vehicles and lifts, negatively impacting MR image quality (via temporary disturbances to static field homogeneity) if the minimum distances from these objects to the proposed position of the MR scanner, as specified by the MR manufacturer, cannot be met.

To establish whether magnetic shielding may be required, MR manufacturers provide information in their site planning guides about the spatial extent of the static magnetic field around their MR systems. This can be overlaid on room plans to give an initial indication of the extent of magnetic field contours, although importantly the actual distributions may vary due to metal in the structure of the building around the MR Examination room, in particular the location of steel beams. Simulations to take these into account and calculate more accurate distributions can be performed by the MR manufacturers. Consequently, it is important to identify any existing steel in the vicinity of the MR Examination room to support these more accurate calculations. Subsequently, such simulations can be used to calculate the amount of magnetic shielding that is required to restrict the extent of the [B<sub>0</sub> Hazard Area](#) accordingly. Importantly, these predictions will be based on the ferrous metal used for the shielding. Examples include M36 silicon steel, Armco and Stabolec steel. In instances where a different material to that used in the simulations is desirable, e.g. to better accommodate structural needs, this should be checked with the MR manufacturer. In some cases, updated simulations may be required.

In the scenario where a decision on the magnetic shielding is required before a decision on the MR scanner to be installed, simulations may be performed by other bodies, e.g. RF cage manufacturers, based on a known worst-case example.

**Real-world example: [B<sub>0</sub> Hazard Area](#) extension into main hospital corridor following inaccurate magnetic shielding calculations.**

This was attributed to steel within the building that was not taken into account in the magnetic shielding calculations. The extension of the [B<sub>0</sub> Hazard Area](#) into the main hospital corridor exposed patients and staff to hazards associated with the static magnetic field.

**Impact: Additional shielding installed at cost to hospital, 1 month delay to project**

**Real-world example: the [B<sub>0</sub> Hazard Area](#) extended further out of the building than predicted.**

The original calculations of the fringe field did not consider metal cladding on the building which pushed the fringe field out in areas without cladding.

**Impact: delays while stud wall removed, additional steel shielding put in place and stud wall replaced.**

**Real-world example: the [B<sub>0</sub> Hazard Area](#) extended further out of the building than predicted.**

The original calculations of the fringe field did not consider existing metal plate in the floor which pushed the fringe field out in neighbouring areas.

**Impact: additional work required to corridor to avoid public access to [B<sub>0</sub> Hazard Area](#).**

The amount of magnetic shielding can vary in size, from a small plate on a single wall to multiple layers on all walls, the ceiling and floor, with weight varying from a few hundred to thousands of kilograms. Consequently, reconfirmation of sufficient structural support for any magnetic shielding is recommended. Additionally, the MR manufacturer will specify limits on the size of magnetic shielding that can be used in relation to the distance of the shielding from the MR scanner. If magnetic shielding is required underneath the MR scanner then there may be scope to suspend this from the slab into the ceiling void of the floor below to increase the distance to the MR scanner isocentre. Positioning the shielding further away from the MR scanner may also reduce the amount of shielding required and subsequently reduce the added structural support required.

It is encouraged to identify any locations where the [B<sub>0</sub> Hazard Area](#) extends outside of the building, even if generally considered inaccessible, and to add these to a site-wide map showing their location together with the location of any MRI quench pipe outlets that can be utilised by estates management, e.g. defining permit to work areas, and fire rescue services.

#### *Acoustic noise*

MR scanners can generate significant amounts of acoustic noise ([Steckner 2025](#)). Additionally, equipment in the MR Technical Room may also be acoustically loud. Acoustic noise issues should be considered, particularly if there are noise-sensitive locations near to the MR suite. These locations include wards, office space and operating theatres but may include other areas. Sensitivity to acoustic noise is likely to be more of an issue for a new MR suite, where people in neighbouring areas are unfamiliar to the background sounds of MRI scanning. Additionally, acoustic noise within the MR suite should be considered. While positioning the MR Examination room door within the MR Control room may have advantages such as improved supervision of the entrance to the MR Examination room, one disadvantage of this arrangement is the potential for increased noise levels within the MR Control room.

Noise transfer can be airborne or via the building structure. Positioning the MR scanner on anti-vibration pads within the MR Examination room may help to reduce structure-borne noise transmission, in addition to reducing incoming external vibrations that may impact the MR system. The use of acoustic foam/panels either side of the RF cage as well as sound-insulating plasterboard may help reduce noise transmission to adjacent areas. Similarly, the introduction of non-conducting packing material into RF waveguides may be helpful to support reduced transmission of acoustic noise. The use of passive acoustic screening within the MR Examination room has also been reported ([Moelker et al 2003](#)). The use of appropriate acoustic dampers within HVAC ductwork to/from the MR Examination room may help to reduce acoustic noise transmission to connected areas.

To address potential acoustic noise issues, e.g. with areas adjacent to the MR suite, the design team may consider appointing an acoustic engineer who may also perform/specify requirements for an acoustic noise survey as part of acceptance testing. More general guidance on acoustic noise considerations is provided in Health Technical Memorandum 08-01: Acoustics ([NHSE 2013](#)). Site planning guides may describe options for acoustic noise suppression, and some RF cage manufacturers offer options for this as part of their product range.

### *Patient privacy*

Depending on the types of MRI examinations planned, the use of blinds or switchable smart glass should be considered with any windows into the MR Examination room to ensure patient privacy.

### *Lighting*

In addition to lower power requirements, LED-based lighting offers the benefit of longevity compared to incandescent lamps. Additionally, conventional filament lamps on an AC supply in the immediate vicinity of the magnet will experience oscillating forces that further reduce their longevity. However, general LED lighting, where the conversion from AC mains to DC occurs within the lamp unit, can cause RF interference that negatively impacts on MRI image quality. LED lighting in the MR Examination room should be provided by systems that are certified as suitable for use in the MR Examination room, where the AC-DC conversion is appropriately screened to avoid RF interference, e.g. by locating this outside of the RF cage.

#### **Real-world example: original LED lighting installed in MR Examination room caused artefact on MR images**

Standard LED lighting that was not specifically designed to be compatible with MRI was installed. The AC/DC conversion that occurred at each lamp produced RF interference that was picked up by the MR scanner, impacting image quality.

**Impact: Costs and delay required to retrofit appropriate LED lighting.**

Consideration should be given to the required lux levels and colour rendering index (CRI) in all areas within the MR suite, including the MR Examination room, particularly if planned MRI services include items where increased illumination is important, e.g. injection and biopsy. [HBN 06-01](#) does not provide specific guidance on lux levels, instead signposting to Lighting for healthcare premises guidelines from the Chartered Institution of Building Services Engineers ([CIBSE 2019](#)). These CIBSE guidelines have recommendations for both 300 lux and 500 lux for MRI imaging suites. The higher figure of 500 lux is recommended here as a minimum, particularly if there is an intention to perform injections, biopsies or other interventions within the MR Examination room, with an option to dim the lighting if required, e.g. to support feed and wrap neonatal MRI. Additionally, these CIBSE guidelines provide recommendations on CRI. Colour controllable LEDs for mood-enhancing lighting to enable an improved patient experience may be considered, but again this should be designed to operate in MRI Examination rooms to avoid RF interference impacting on MR image quality. Emergency lighting in the event of a power failure is a requirement under [BS 5266-1 \(2025\)](#), with the level of emergency lighting determined by local requirements.

Ideally, the light switch for the MR Examination room should be located outside of the room, e.g. in the MR Control room, to provide the ability to illuminate the MR Examination room without entering. This allows a visual inspection via the MR Control room window while maintaining a locked MR Examination room door which may be preferable in the event of an alarm going off out of hours, e.g. fire or oxygen alarm.

#### **Real-world example: Fire alarm in MR suite out of hours**

The fire alarm was triggered in the MR suite in the middle of the night. The attending fire brigade wanted to illuminate the MR Examination room to visually check for signs of smoke, but the light switch was located in the MR Examination room.

**Impact: MR staff were called to site to gain access to the MR Examination room to turn on light. Subsequent new MRI installations designed with MR Examination room light switch located in the MR Control room.**



### *Patient experience*

Various options are available for consideration within the MR Examination room to help improve patient experience. These include RF-shielded windows and additional lighting options such as artificial skylights, illuminated wall panels or coloured mood lighting. Examples of these are shown below in Figure 9. Such measures can help improve patient co-operation during the MRI scan, particularly with regards staying still, which subsequently has an impact on the quality of the MR image acquired. This may be more relevant for certain patients, e.g. individuals who are particularly anxious and paediatric patients.



*Figure 9. Example of artificial skylight designed for use in the MR Examination room and an RF-shielded window, both of which can help to improve the patient experience of an MRI scan.*

Importantly, any such lighting options should be designed to work in MR Examination rooms without causing RF interference. For any MR suites where multi-nuclear examinations are planned, all relevant frequencies should be considered with regards potential RF interference.

#### **Real-world example: Coloured mood lighting created RF interference on MR images**

Third party coloured lighting was installed in the MR Examination room as part of a push to increase patient experience within the design. After installation, the lighting was found to create significant RF interference on MR images.

**Impact: Coloured lighting was turned off and was unused.**

Additionally, a video system that allows patients to watch videos during their MRI scan can be helpful in multiple situations. Examples of this include goggle-based video systems or a wall-mounted monitor that the patient can view via an angled mirror. Wall-mounted monitors are ideally located behind the MR scanner, level with the scanner bore for the patient to view. Monitors

mounted to a floor stand are also possible. Any video system will typically require additional space within the MR Control room for the video control. Additionally, consideration of an additional monitor within the MR Control is advisable to allow staff to clearly see what the patient is viewing and to help selection of video content.

If music/video streaming from the internet is planned, it is important this is highlighted and agreed with local IT services as part of the IT requirements for the MR suite.

#### *Floor demarcation and tether anchor points*

Consideration should be given to marking a zone within the MR Examination room using a change in floor colour. This can be helpful to demarcate a specific static magnetic field strength around the MR scanner, which may be used to indicate where certain MR Conditional equipment—which has limits on the maximum static magnetic field it can safely be exposed to—should be excluded from. An IPEM report on MRI safety signage ([IPEM 2017](#)) indicates a 10 mT floor marking is appropriate for most [MR Conditional](#) equipment that may be brought into the room, although a check on static magnetic field limits of any MR Conditional equipment planned for the MR Examination room is recommended. Incorporating demarcation in the design rather than applying floor marking as a post-installation modification can be helpful to ensure infection control requirements are satisfied.

How the position of floor demarcation will be planned should be considered. MR engineers often ramp the magnet up and down during installation which may provide an opportunity to measure the fringe field and install the floor demarcation prior to the magnet being ramped up again. This approach will require coordination with the [MR Installer](#). Alternatively, a more conservative marking should be considered to allow for variations between the expected and actual fringe fields.

An example of floor demarcation is shown below in Figure 10.



*Figure 10. Example of change in floor colour to visually demarcate a specific threshold of the magnetic field.*

Additionally, the fitting of anchor points in the walls inside the MR Examination room with fixed-length tethers should be considered to help ensure such [MR Conditional](#) equipment is not inadvertently moved closer to the MR scanner and into a higher magnetic field than is specified on the [MR Conditional](#) labelling. The fitting of these and any other wall fixations should be carefully planned to avoid inadvertently penetrating the RF cage and impacting its integrity. An alternative may be to anchor into cabinetry casework. An example of wall anchor points is shown below in Figure 11.



*Figure 11. Example of anchor point in wall providing scope for non-ferromagnetic chain to tether an [MR Conditional](#) anaesthetic machine to avoid it being taken closer to the MR scanner than intended.*

### [Storage](#)

Provision of adequate storage within the MR Examination room is essential to accommodate various MRI equipment and consumables. The MR manufacturer may provide a coil storage cart as part of the MR system, but additional storage will be likely.

Strong consideration should be given to build design options that provide long-lasting solutions to minimize the need for servicing/maintenance throughout the lifetime of the MR system, e.g. continuous hinges that distribute weight over the length of frame, reducing stresses on individual points and the likelihood of door sagging.

It is important to consider manual handling, which can be particularly relevant for heavier items such as some MRI coils and test objects. Third party options are available for table-height rolling carts that allow for the transfer of heavy RF coils and other equipment with minimal lifting.

#### **Real-world example: high shelving for MRI test objects**

Manual handling was not considered as part of the design and high shelving was installed for the storage of heavy MRI test objects.

**Impact: Ongoing manual handling issues for MR staff and potentially increased risk of droppage.**



### *Power sockets/network ports*

The need for power sockets and network ports within the MR Examination room should be considered. Electrical cabling into the MR Examination room will be required to pass through low-pass filters to avoid introducing unwanted external RF interference into the room. Similarly, network cables will need to pass through a dedicated filter or be converted into an optical signal to allow passage via optical fibre through a waveguide.

### *Wall-mounted emergency stop buttons*

The MR examination typically has two wall-mounted emergency stop buttons.

- Emergency Magnet Off (also known as the quench button).
- Emergency Power Off (sometimes abbreviated to EPO)

The location of these emergency stop buttons should ensure they are easily accessible to staff while minimizing the risk of accidental activation. A common and effective location is above the height of frequently used equipment, such as patient trolleys, but still within comfortable reach for most staff. To further reduce the risk of unintended activation, it is recommended to install a protective guard flap.

#### **Real-world example: Shelving in MR Examination room was positioned immediately below the Magnet quench button which did not have a protective cover**

An item of equipment was placed on the shelving, partly obscuring the magnet quench button. Subsequently, the item was pushed back on the shelf, inadvertently coming into contact with the emergency button and activating a magnet quench.

**Impact: Several days downtime & cost of replacement helium associated with unintended manual activation of magnet quench. Current cost estimate > £100,000**

Emergency stop buttons should be clearly labelled as to their purpose. The MR manufacturer will provide recommendations on labelling, with a new label for the Emergency Magnet Off button introduced IEC 60601-2-33 (2022). Additional guidance and templates are provided by [AXREM](#) and [IPEM](#).



*Figure 12. Example of wall mounted emergency magnet off button with protective guard flap to avoid accidental activation and the new signage label introduced in IEC 60601-2-33 (2022).*

Both emergency stop buttons should also be installed in the MR Control room. An emergency electrical power off button may also be installed in the MR Technical room. The position of all emergency stop buttons should be marked on a plan of the MR suite and incorporated into local documentation, e.g. in the MRI Local Rules.

#### 3.4.9 Recovery area

##### *Function*

An area for patient recovery that is separate to the preparation area may be considered. This may be helpful to facilitate an efficient workflow if the available size of the preparation area is limited and cannot accommodate multiple patients.

##### *Location*

The recovery area may be located outside of the [MR Controlled Access Area](#), although close proximity may be desirable to minimise distance during the transport of any intubated patients if planning to provide MRI scanning under general anaesthetic.

##### *Operational/design considerations*

If outside of [MR Controlled Access Area](#), there may be scope to share the recovery area with other modalities.

For anaesthetic recovery piped oxygen and suction should be available.

Lockable drug cupboards may be required.

### 3.4.10 MR Control room

#### *Function*

The Control room is the hub of the MR suite and is where MR staff will spend significant amounts of time. Activities associated with this room include controlling the scanner, observing the patient whilst in the scanner, performing administrative computer-based tasks associated with the MRI service, taking phone calls and having oversight of activities occurring within other areas of the MR suite.

#### *Location*

The MR Control room is located next to the MR Examination room. Ideally, it should either be located close and have visibility of the entrance to the [MR Controlled Access Area](#) (or have other means for MR staff within the MR Control room to observe this entrance, e.g. CCTV) in order to help supervise access to the [MR Controlled Access Area](#), e.g. observing tailgaters.

#### *Operational/design considerations*

The MR Control room requires sufficient space for the operator console and additional devices such as: a CCTV monitor for patient observation; the patient call/alert system; patient intercom and possible music system; a control system for the power injector; a remote monitor for any patient physiological monitoring equipment; and usually a separate computer for accessing the Hospital Radiology Information System (RIS) and/or the Hospital electronic patient record (EPR) system. More generally, the MR Control room should be of sufficient size (see [HBN 06-01](#)) to allow the full range of occupancies expected to be accommodated. Higher occupancies may occur for GA sessions or other specialist scanning activity and should be considered when planning the MR Control room. Guidelines from the Association of Anaesthetists of Great Britain and Ireland ([Wilson et al. 2019](#)) highlight the need for additional space in the MR Control Room to allow remote anaesthetic monitoring equipment and line-of-sight patient monitoring for all staff, anaesthetists and radiographers.

The MR Control room should provide line-of-sight overview of the inside of the MR Examination room via a viewing window. A preferred configuration is for the MR Control room to have an uninterrupted view down the magnet bore to allow the MR operator to be able to observe the patient for signs of distress / deterioration. Typically, the majority of patients enter the MR scanner head-first, and consequently a view from the MR table end is preferred. Where direct line-of-sight is not feasible, a view down the magnet bore may be provided by additional means such as CCTV.

Additionally, the MR Control room should ideally provide direct line of sight to the area immediately outside of the MR Examination room door, allowing the MR staff within the Control room to observe anyone approaching the MR Examination room.

Shared MR Control rooms for multiple MR systems can be beneficial, e.g. to allow greater flexibility for radiographer support between MR systems, although patient privacy and background noise when communicating with patients should be considered.

Dimmable lighting in the MR Control room is generally helpful to allow MR staff to modify lighting level to be appropriate for viewing MR images.

The use of window blinds/switchable opaque glass for the MR Examination room should be considered to ensure patient privacy for certain MRI examinations. Additionally, their inclusion with other windows in the MR Control room may be appropriate to protect patient confidentiality.

Consideration should be given to what control/alarm panels are to be installed within the MR Control room to immediately alert MR staff to any issues associated with the supporting plant so that they can take appropriate action and potentially minimise any downtime of the MRI service. These should include the following.

- Chiller mimic panel to alert MR staff to any issues with the chiller. In chillers systems with built in redundancy, any issues should be highlighted on the chiller mimic panel so that ideally they can be addressed before total chiller failure, avoiding any MRI downtime.
- MR Examination room heating ventilation and air conditioning (HVAC) status. [HBN 06-01](#) recommends that there should be a green indicator light in the MR Control room to confirm to the staff that the ventilation is operational and a red light to indicate that it is not operational or has a fault.
- MR Examination room temperature. [HBN 06-01](#) recommends there should be an audible alarm if the ambient room temperature falls outside of the range specified.
- MR Examination room humidity
- Leak detection in MR Technical room
- Oxygen alarm
- Medical gases
- Nurse call for changing rooms/toilet



Figure 13. Examples of oxygen monitoring displays in the MR Control Room.

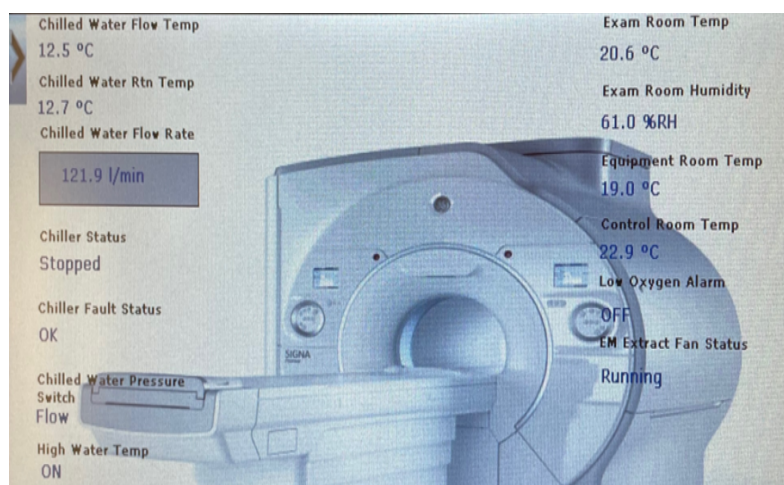


Figure 14. Heating, ventilation, and air conditioning (HVAC) mimic panel, providing information on the chilled water entering the facility, magnet and MR Control room temperature and relative humidity. The oxygen sensor alarm and emergency extract fan status are shown as is the chiller status.

The MR Control room should also contain an Emergency Magnet Off button (also known as the quench button) and an Emergency Power Off button. As with the MR Examination room, these buttons should be positioned to ensure they are easily accessible to staff while minimizing the risk of accidental activation. A commonly recommended location is above the height of frequently used equipment yet still within comfortable reach for most staff. To further reduce the risk of unintended activation, installation of a protective guard flap is recommended. Both the quench and emergency electrical power-off buttons should be clearly labelled.

Clear labelling of each control/alarm panel should be considered, incorporating a description of what it is, an indication of the normal levels and who should be contacted in the event of an alarm. Figure 15 highlights various labels from the IPEM MRI safety notices ([IPEM 2017](#)), including a recent update introducing variations to the label for the Emergency Magnet Off button to cover both conventional and low helium MRI systems.

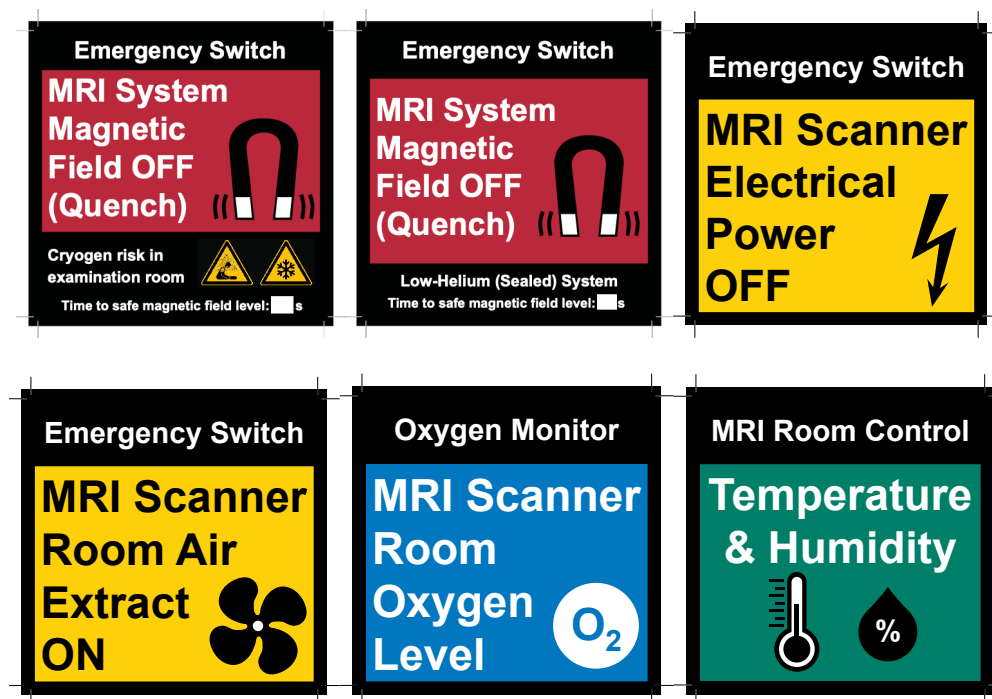


Figure 15. Example of IPEM signage for the labelling of various MR safety related items.

#### Real-world example: Chiller mimic panel not installed in MR control room.

On a non-turnkey installation, MR staff missed that a chiller mimic panel was not planned for the MR control room. Consequently, once operational, MR staff were not made aware of chiller problems until they resulted in problems with MR system.

**Impact: Chiller alarm panel was retrofitted at additional expense**

Given the potentially large number of items of electrical equipment within the MR Control room, it is important to ensure the MR Control room has sufficient number and distribution of power sockets and network ports. It is often helpful to have sockets available both above and below desk height to support a range of connections.

### 3.4.11 MR Technical room

#### *Function*

The MR Technical room accommodates parts of the MR system that are sited outside of the MR Examination room. This equipment is generally housed within multiple equipment cabinets. The MR Technical room may also accommodate additional equipment, e.g. a video projector to support functional MRI studies or a UPS/power conditioning.

#### *Location*

The MR Technical room is generally located immediately adjacent to the MR Examination room as the MR manufacturer will generally specify a maximum length for cables between the MR scanner and the equipment within the MR Technical room. However, these specifications may still allow for a small amount of separation between these two rooms if required.

Additional reasons/benefits for immediate adjacency to the MR Examination room include the following.

- Video projection from the MR Technical room into the MR Examination room, e.g. for fMRI studies.
- Avoiding the need for passive magnetic shielding in the separating wall that might otherwise have been required to contain the [B<sub>0</sub> Hazard Area](#).

#### *Operational/design considerations*

The size of the MR Technical room and the distance between the electronic cabinets and MR system should comply with the MR manufacturer's requirements.

When planning adjacent MR Technical rooms, it is recommended to seek advice from the MR manufacturers, since some have requirements for a minimum separation distance between the electronics cabinets of different MR systems if operating at the same nominal field strength (e.g. one MR manufacturer has a recommendation of a 5 m separation). In general, it is preferable to have separate MR Technical rooms to avoid complications from different service or environmental requirements, particularly if the MR systems are from different manufacturers. Additionally, consideration should be given to potential future changes in MR scanner replacements.

Entrance to the MR Technical room may be from within the [MR Controlled Access Area](#) or from outside of the [MR Controlled Access Area](#). Either way, a general door lock is recommended, with the physical key often kept in the MR Control Room. Entrance to the MR Technical Room via the MR Examination room itself should be avoided where possible. Practically, it is desirable for the entrance to the MR Technical room to be relatively close to the MR Control room, particularly for MR engineers who often need to work between these locations when on site.

Generally, the MR Technical room is the location within the MR suite with the greatest requirements in terms of power and chilled water. Additionally, there may be significant requirements for air conditioning. These are all discussed in the section on the [supporting plant](#). Positioning water pipes immediately above the electrical equipment cabinets should be avoided where possible. Where this is not possible, consideration should be given to the installation of drip trays above electrical equipment cabinets, ideally with a direct connection to drain. Since the MR Technical room is often unoccupied, installation of a leak detection system in any drip trays and in the floor of the MR Technical room is advisable with an alarm point within the MR Control room to help ensure swift remedial action in the event of a leak.



**Real-world example: Water damage to MRI electrical equipment in the MR Technical Room**

Water leak from floor above into MR Technical room leading to damage to electrical equipment.

**Impact: £100,000 cost, 3 weeks system down time for replacement of MRI cabinets. A drip tray was subsequently installed above the cabinets with a leak detection system incorporating an alarm in the MR Control room.**

Network connections and power sockets within the MR Technical room may be required to support remote monitoring solutions.

**3.4.12** [Cleaning/storage/staff changing](#)

Consideration should be given to sufficient storage space for cleaning equipment and other items within the MR suite. These may include the following.

- Filters and other consumables for chillers and other supporting plant
- [MR Conditional](#) patient transfer equipment
- [MR Conditional](#) monitoring equipment
- Radiotherapy planning equipment.

Ideally, [MR Safe](#)/[MR Conditional](#) items that are to be used within the [MR Environment](#) should be stored within the [MR Controlled Access Area](#) to help ensure they are not inadvertently swapped with similar equipment that is unsafe to bring into the [MR Environment](#).

**Real-world example: [MR Safe](#) cleaning equipment stored outside the [MR Controlled Access Area](#) inadvertently swapped with ferromagnetic cleaning equipment**

A fully plastic mop, labelled as [MR Safe](#), that was used to clean in the [MR Environment](#) was inadvertently swapped with another mop that contained ferromagnetic components. This was subsequently taken into the MR Examination room.


**Impact: Projectile incident where ferromagnetic mop was pulled into the MR scanner bore.**

Additionally, space for staff changing including secure storage should be considered.



### 3.5 Examples of an MR suite layout


Throughout this guidance an attempt has been made to focus on examples of best practice. However, it is recognised that practically there may be a need for compromises to be made, especially when designing into an existing and limited space. To support this aspect, this section provides examples of different actual MR suite layouts, highlighting some ideal and non-ideal features of each. The ACR zones are highlighted on these example plans in addition to the [MR Controlled Access Area](#) and the [MR Environment](#).

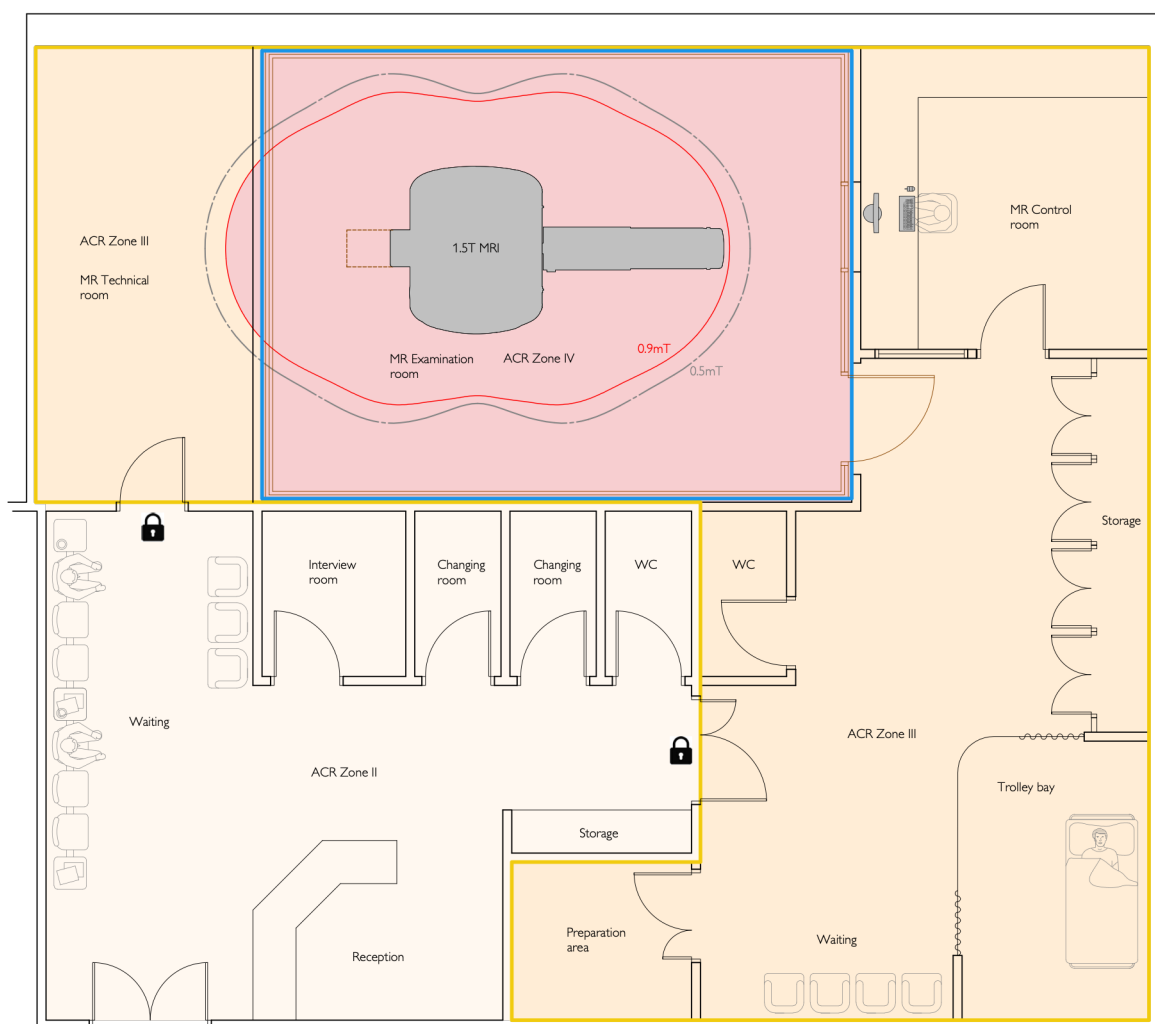

#### Legend

— MR Controlled Access Area — B0 Hazard Area (0.9mT) — MR Examination room — MR Environment


| Ideal (good practice)                                                                      | Non-ideal (potential issues)                                                                         |
|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Good line of sight of MR Examination room door from operator in MR Control room via window | MR Technical room opens outside of <a href="#">MR Controlled Access Area</a> although lockable door. |
| Interview room outside <a href="#">MR Controlled Access Area</a>                           | Sub-waiting area inside <a href="#">MR Controlled Access Area</a>                                    |
| WC within <a href="#">MR Controlled Access Area</a>                                        |                                                                                                      |
| Operator has direct view down the scanner bore from MR Control room                        |                                                                                                      |
| Well defined preparation area                                                              |                                                                                                      |
| Changing rooms outside <a href="#">MR Controlled Access Area</a>                           |                                                                                                      |
| Single entrance into the main <a href="#">MR Controlled Access Area</a>                    |                                                                                                      |
| Spacious MR Examination room                                                               |                                                                                                      |

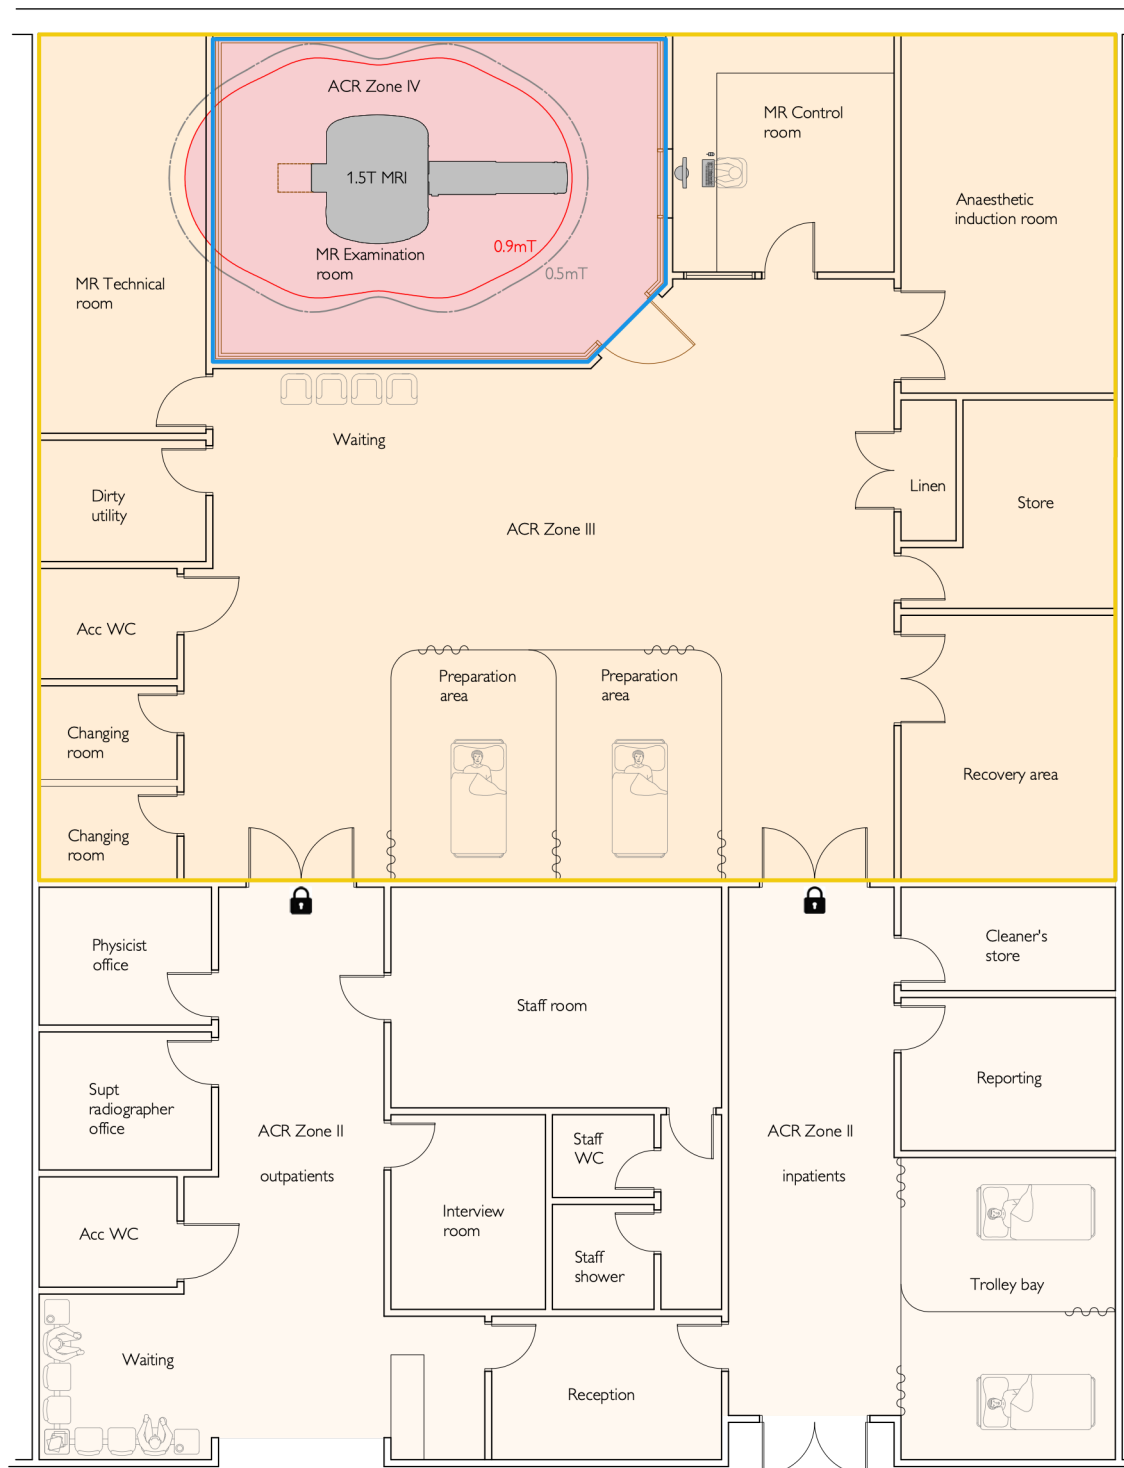

#### Legend

— MR Controlled Access Area   
 — B0 Hazard Area (0.9mT)   
 — MR Examination room   
  MR Environment


| Ideal (good practice)                                                                      | Non-ideal (potential issues)                                                         |
|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Good line of sight of MR Examination room door from operator in MR Control room via window | Changing rooms and sub-waiting area inside <a href="#">MR Controlled Access Area</a> |
| Interview room outside <a href="#">MR Controlled Access Area</a>                           |                                                                                      |
| WC within <a href="#">MR Controlled Access Area</a>                                        |                                                                                      |
| Operator has direct view down the scanner bore from the MR Control room                    |                                                                                      |
| Preparation area of reasonable size                                                        |                                                                                      |
| Changing rooms outside <a href="#">MR Controlled Access Area</a>                           |                                                                                      |
| Spacious MR Examination room                                                               |                                                                                      |

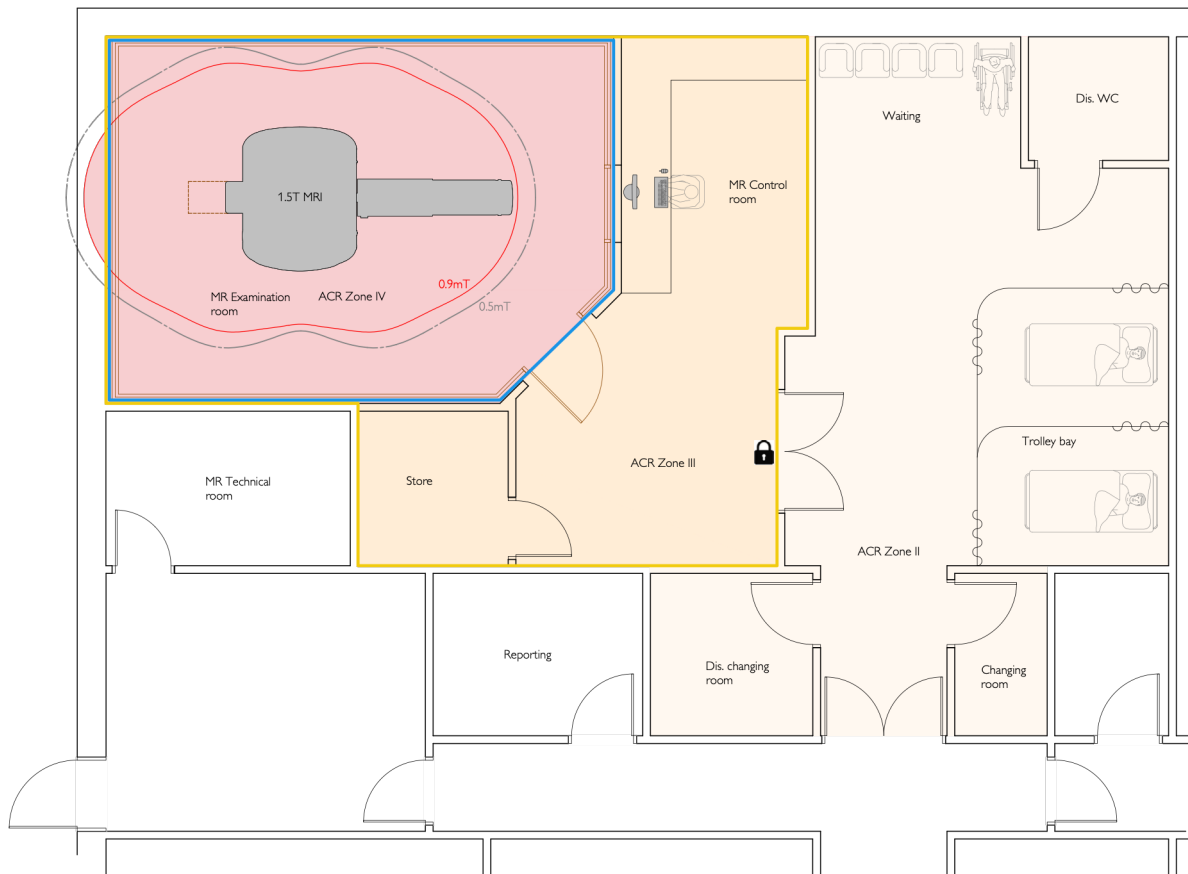

Legend

— MR Controlled Access Area    
 — B0 Hazard Area (0.9mT)    
 — MR Examination room    
  MR Environment


| Ideal (good practice)                                                           | Non-ideal (potential issues)                           |
|---------------------------------------------------------------------------------|--------------------------------------------------------|
| Clear MR safety zones                                                           | No clearly identified preparation area.                |
| Good line of sight of MR Examination room door from operator in MR Control room | No WC within <a href="#">MR Controlled Access Area</a> |
| Operator view straight down bore from the MR Control room                       | No interview room                                      |
| Changing rooms outside <a href="#">MR Controlled Access Area</a>                |                                                        |
| Single entrance into <a href="#">MR Controlled Access Area</a>                  |                                                        |

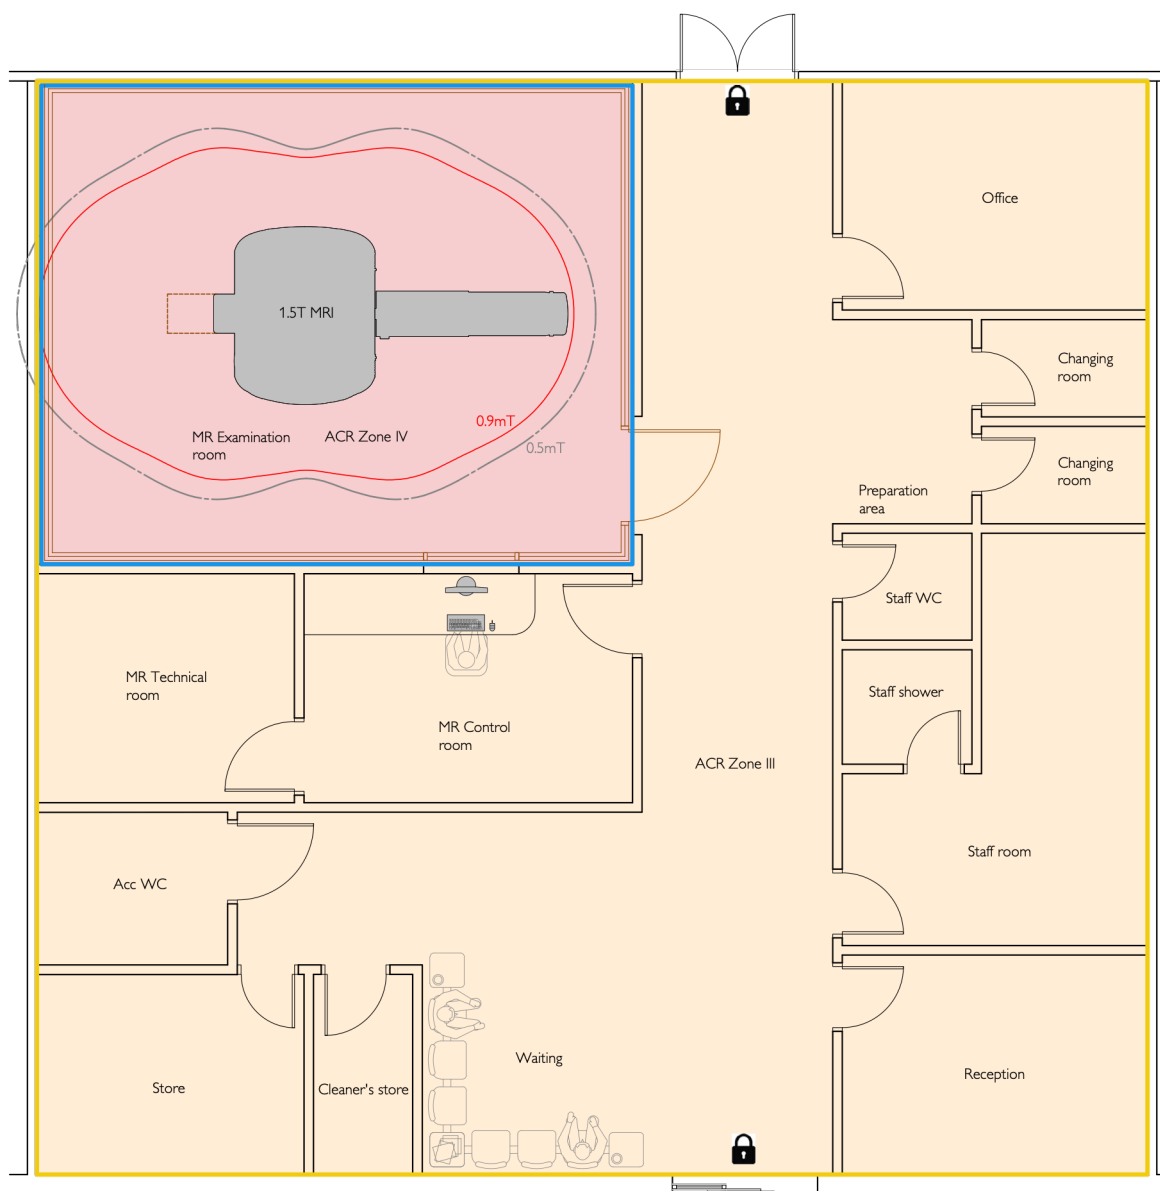

#### Legend

— MR Controlled Access Area   
 — B0 Hazard Area (0.9mT)   
 — MR Examination room   
  MR Environment

| Ideal (good practice)                                          | Non-ideal (potential issues)                                                                            |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Single entrance into <a href="#">MR Controlled Access Area</a> | Operator does not have line of sight of the MR Examination room door                                    |
| WC inside <a href="#">MR Controlled Access Area</a>            | Entrance to MR suite opens directly into the <a href="#">MR Controlled Access Area</a> . No ACR Zone II |
|                                                                | Preparation area is limited in size and ill defined.                                                    |
|                                                                | No interview room                                                                                       |
|                                                                | Operator has a side on view of MR scanner                                                               |
|                                                                | Changing rooms located very close to MR Examination room door                                           |

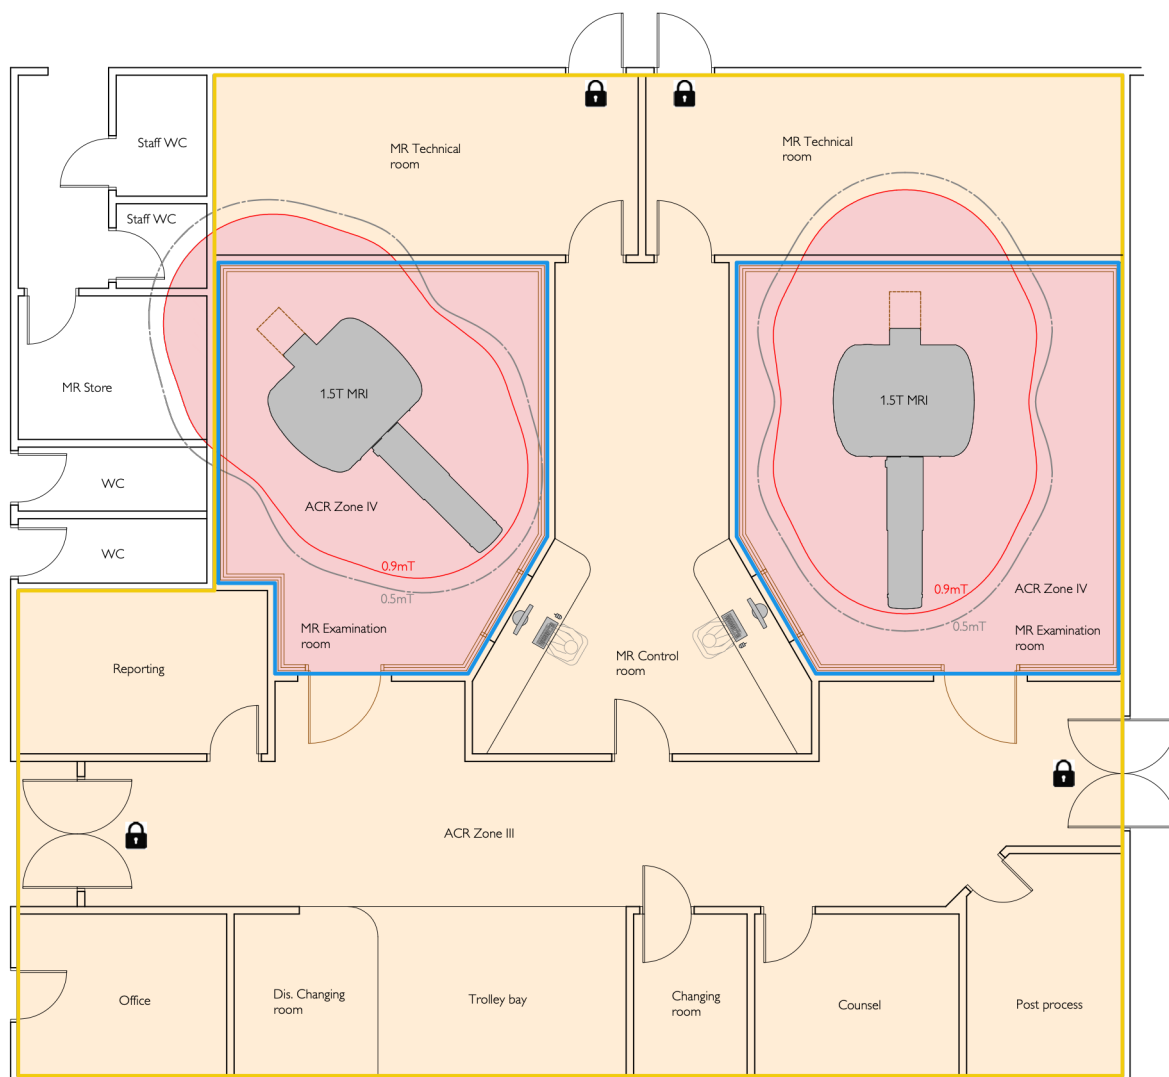


#### Legend

— MR Controlled Access Area    — B0 Hazard Area (0.9mT)    — MR Examination room    MR Environment

| Ideal (good practice)                                                      | Non-ideal (potential issues)                                                                                                                                       |
|----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operator has view straight down bore from Control room (Left hand scanner) | Operator has no direct view down scanner bore from Control room (Right hand scanner)                                                                               |
|                                                                            | Operator has no line of sight of MR Examination room door from MR Control room.                                                                                    |
|                                                                            | Changing rooms inside <a href="#">MR Controlled Access Area</a>                                                                                                    |
|                                                                            | No WC within <a href="#">MR Controlled Access Area</a>                                                                                                             |
|                                                                            | No preparation area                                                                                                                                                |
|                                                                            | No interview room                                                                                                                                                  |
|                                                                            | Multiple entrances to the <a href="#">MR Controlled Access Area</a>                                                                                                |
|                                                                            | <a href="#">B<sub>0</sub> Hazard Area</a> extends significantly out of the back wall of magnet requiring either shielding or control of access for rooms involved. |




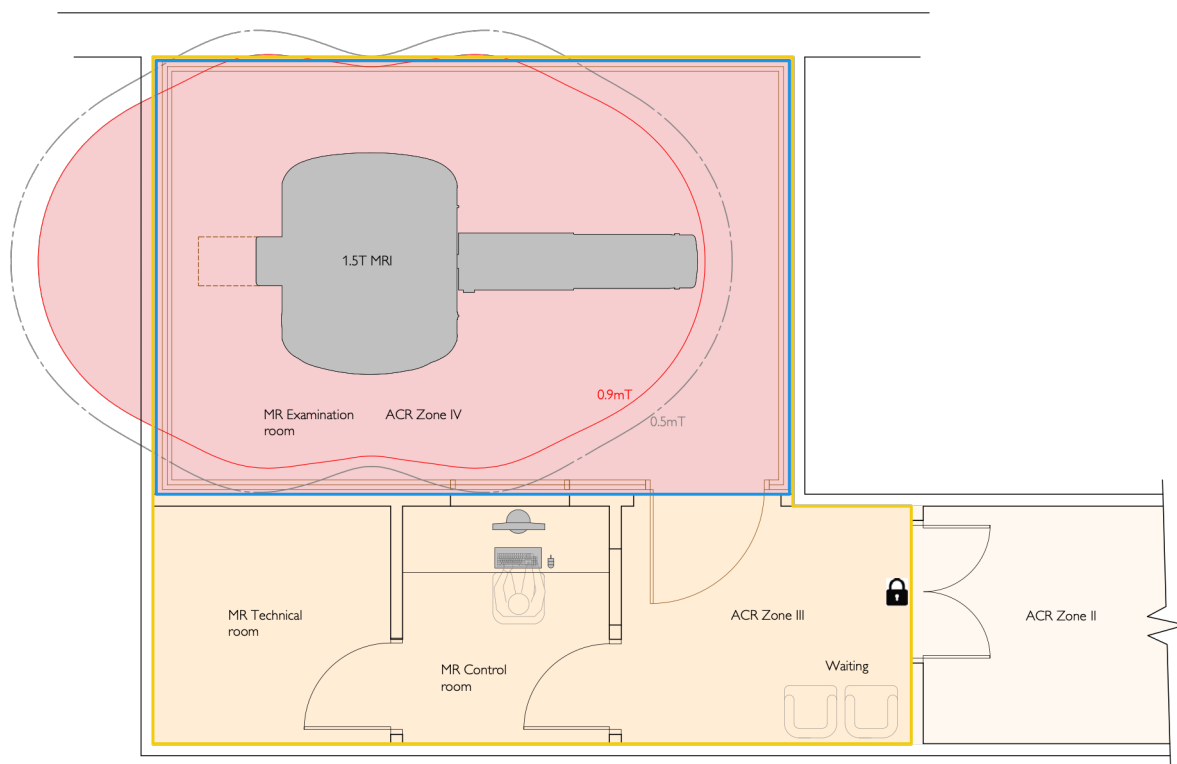

**Legend**

— MR Controlled Access Area    — B0 Hazard Area (0.9mT)    — MR Examination room    MR Environment

| Ideal (good practice)                                                                      | Non-ideal (potential issues)                                                                                                                    |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Good line of sight of MR Examination room door from operator in MR Control room via window | No changing rooms identified                                                                                                                    |
| MR Technical room in <a href="#">MR Controlled Access Area</a>                             | No WC within <a href="#">MR Controlled Access Area</a>                                                                                          |
|                                                                                            | No preparation area                                                                                                                             |
|                                                                                            | No interview room                                                                                                                               |
|                                                                                            | Operator has a side on view of MR scanner                                                                                                       |
|                                                                                            | <a href="#">B<sub>0</sub> Hazard Area</a> extends significantly out of the back wall of magnet requiring either shielding or control of access. |

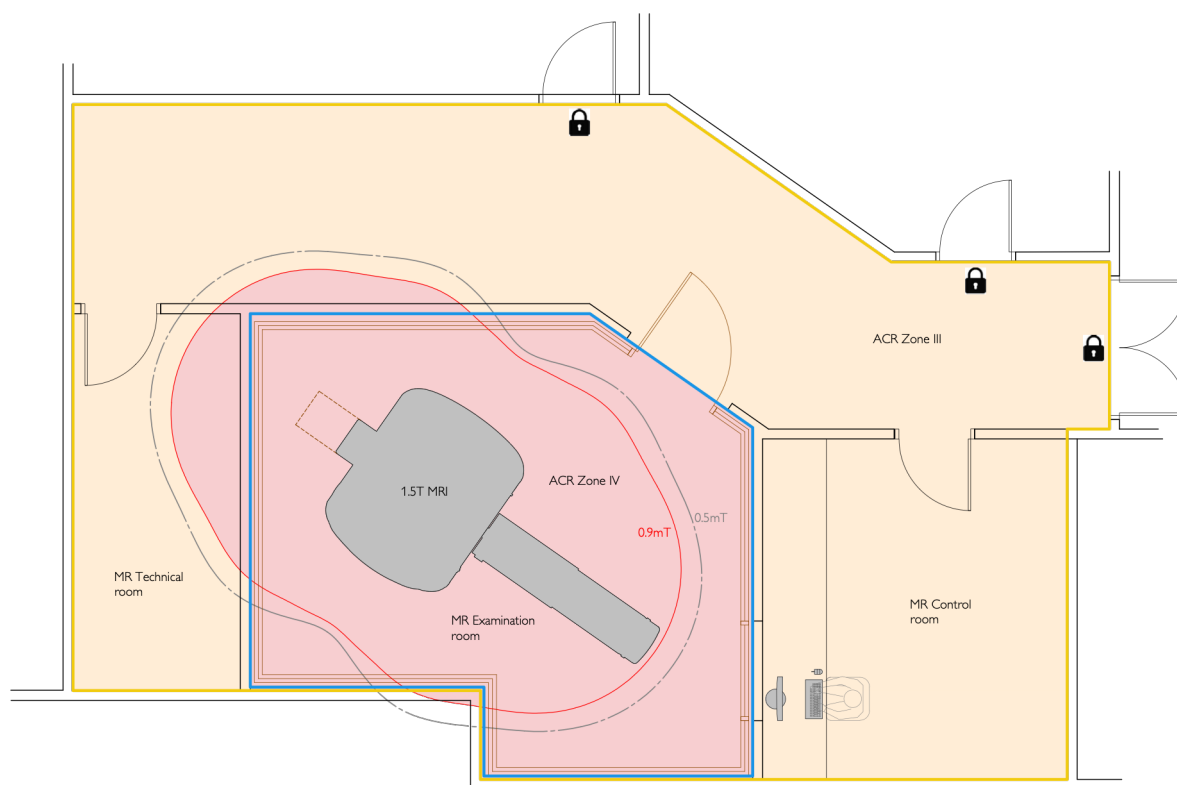

**Legend**

— MR Controlled Access Area    — B0 Hazard Area (0.9mT)    — MR Examination room    MR Environment

| Ideal (good practice)                                          | Non-ideal (potential issues)                                                                                |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| MR Technical room in <a href="#">MR Controlled Access Area</a> | Operator has no line of sight of MR Examination room door from MR Control room.                             |
|                                                                | MR Examination room opens into a potential through corridor.                                                |
|                                                                | No WC within <a href="#">MR Controlled Access Area</a>                                                      |
|                                                                | No preparation area                                                                                         |
|                                                                | No interview room                                                                                           |
|                                                                | <a href="#">B<sub>0</sub> Hazard Area</a> very close to external wall and potentially extends a few cm out. |
|                                                                | MR Examination room has complicated shape adding to expense and potentially awkward workflow in room.       |

## 3.6 Supporting plant and items external to the MR suite

### 3.6.1 Quench pipe

Some of the latest generation of superconducting MR systems require very little helium, such that they can accommodate the helium gas that is produced in the event of a magnet quench within the physical confines of the scanner. However, many clinical MR systems at the time of writing use much larger amounts of helium that require the installation of a quench pipe to vent the helium gas in the event of a magnet quench from the MR scanner to outside of the building. Appropriate design of the quench pipe is important to ensure safety.

Designing the general arrangement of a quench pipe at an early stage of a project, before specialists are engaged, requires careful consideration of several factors. Ultimately, the structural engineer will be responsible for specifying the quench pipe design.

The following steps are recommended for consideration to help guide the design process.

- Understand the Purpose of Quench Pipes. Quench pipes are essential safety features designed to safely carry away helium gas in the event of a magnet quench. They help prevent pressure buildup and potential hazards by providing a controlled path for the escaping gas.
- Locating the MR Examination room. The quench pipe is a consideration when deciding on an appropriate location for the MR Examination room. Due to the size of MR scanners, however, the access required for installation or replacement usually dictates that the MR Examination room is located adjacent to an external wall, or in some instances on the top storey below a roof which can be opened for install and replacement. This, in turn, usually means the quench pipe also has near-by access to external air. If the area immediately around the quench pipe outlet is accessible, this should be a restricted area, e.g. governed by a permit to work.
- Coordinate with MRI Equipment Layout. Gain an understanding of the planned layout of the MR suite, including the location and size of the MRI magnet and associated equipment. If the client has not chosen their preferred supplier, the architect may request permission from the client to contact the suppliers that are being considered, in order to request their standard design guidance. This information will influence the placement and routing of quench pipes.
- Check MR manufacturer requirements. MR manufacturers will typically specify quench pipe requirements for the diameter of the quench pipe related to the total distance and number of turns.
- Identify Potential Quench Pipe Routes. Assess potential routes and locations for quench pipes based on the MR suite's layout and supplier guidance. Consideration should be given to minimizing the length of the quench pipe, and the number of turns required, to reduce resistance. Avoid routing pipes through occupied or sensitive or 'difficult to access' areas of the building. Avoid routing the pipe through fire rated construction to avoid breaching the integrity of the fire line. Plan for appropriate outlet gas discharge locations away from building openings (windows, intake louvres, etc.) and populated areas. Choose a discharge point at a higher elevation, if feasible and safe, to facilitate better dispersion of gas into the atmosphere. Seek feedback from the client's safety experts, building officials, and other relevant parties to validate the suitability of the proposed discharge location. Particularly for aesthetically significant buildings, there may be restrictions on the quench pipe exiting through a side wall.
- Some sites may have additional local restrictions. Be prepared to revise the design if additional safety measures or adjustments are recommended. Document the proposed quench pipe general arrangement in preliminary design drawings and specifications. Clearly

communicate the design intent and key risks to future specialists who will further develop and implement the detailed design.

- **Identify Potential Quench Pipe Outlet Type.** Once the preferred and safest outlet location is identified, choose the type of outlet that best directs the gases away from sensitive areas to allow for safe dispersal of helium gas without causing hazards to nearby individuals or buildings. Avoid locations where gas could be trapped or recirculated back into occupied spaces, for example through mechanical intake louvres. All outlets should be designed to prevent wind-driven precipitation from entering or collecting in the outlet. To mitigate for the potential of birds' nests, the outlet should be covered by a mesh to prohibit birds from entering. Typical outlet types are indicated in Figure 16. Additional roof membrane protection against cryogenic temperatures should be considered for roof outlet designs that project the helium gas directly onto the roof surface. The choice of quench pipe outlet should also consider the potential need for future work adjacent to the outlet, e.g. orientating roof outlets off the edge of the building or extending the height of the quench pipe outlet to avoid risks to anyone working on the roof.

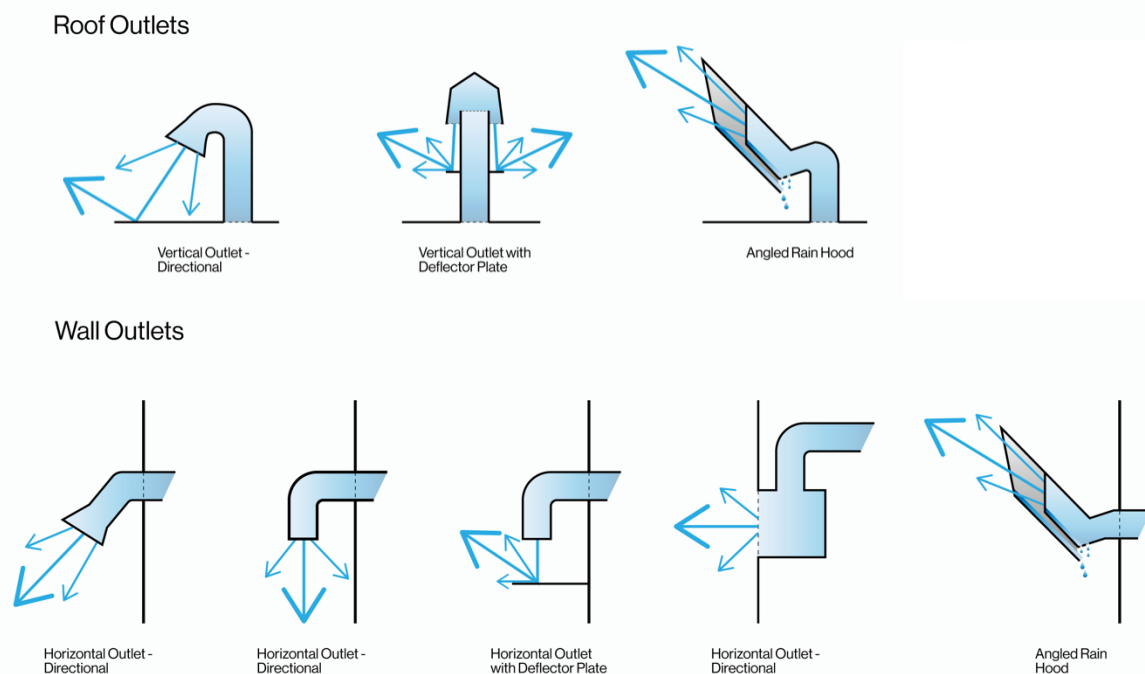


Figure 16. Examples of quench pipe outlet designs.

- **Exclusion Zones and Shielding.** The recommended exclusion zones around quench pipe outlets can vary greatly between MR manufacturers. Previously, the HBN 06-03 guidance (2003) recommended a minimum of a 3 metre exclusion zone. HBN 06-03 was withdrawn around 2010 for reasons unknown, but the 3 metre minimal exclusion zone is still quoted in MHRA guidelines. The exclusion zone extent is also determined by the detailed design of the outlet. The level of design detail available can vary depending on the MRI supplier. MRI suppliers may provide detailed information for one or more types of outlets, but not necessarily the type that appears most suited to the project circumstances. Additional deflection shielding may also be required to guide the gases away from sensitive areas. Such additional shielding should normally be designed or specified by the quench pipe designer to ensure a single point of design responsibility.

- **Quench Pipe Specialist Design Scope.** The design needs to specify that the final outlet type, location and exclusion zone is all to be designed and confirmed by a specialist, commonly a subcontractor to the main contractor. In the event that fully coordinated detail designs are required for building regulations applications, then the client will need to have decided on the specific MRI equipment to be used and commissioned the full specialised design of the quench pipe and outlet based on the chosen equipment. In any event, it is recommended that the specialist is appointed as early as possible in the design process. The responsibilities of the specialist quench pipe designer should include the following.
  - confirmation or comment on the suitability of the proposed pipe route
  - confirmation or comment on the suitability of the proposed outlet location and type.
  - engagement with the client to agree the outlet type and position with regards to the anticipated maintenance regime.
  - coordination with the MRI equipment supplier to ensure the supplier's technical performance requirements for the quench pipe are clear and understood.
  - advise the architect on the required extent of exclusion zone.
  - engagement with the design team to ensure design responsibilities, especially at points of interface, are clear and confirmed.
  - advising the design team if any additional protection measures are required to the building fabric surrounding the quench pipe. For example, if the quench pipe is directed directly onto a roof.
  - coordination with the design team including structural engineer to finalise all details necessary for construction, including quench pipe fixing points, secondary support structures etc.
  - contribute to the health and safety file and operations and maintenance manual
  - provision of compliance declarations for the quench pipe designs, in accordance with all relevant regulations associated with the specialist's scope of work, for building regulation submission.
  - Consideration of introducing inspection points at regular intervals along the length of the quench pipe within the building to allow the integrity of the quench pipe and any fixings to be visually checked.
- **Exclusion Zone Access Control.** There should be agreement on a suitable barrier system to prevent accidental access or to deter unauthorised access into the quench danger zone. The barrier system would need to allow access for routine quench pipe inspection and maintenance.
- **Consider Engineering Integration.** With the project structural engineer, evaluate how quench pipes can be integrated into and fixed to the building's structural design. Whilst project building services engineers are not usually directly involved in the design and specification of the quench pipe, coordination between the pipework and other building services, including at high level within the MR Examination room is important, for example to avoid crossovers and ensuring adequate access.
- **Plan for Future Expansion and Maintenance.** Anticipate future needs for maintenance and potential upgrades of the MR system. Design quench pipe routes and access points with consideration for ease of maintenance and potential future modifications.
- **Consider Future Building Use and Development.** Where possible and with advice from the Client, anticipate future changes in building use or nearby developments that could affect the safety of the selected discharge location. Design the quench pipe outlet with flexibility to adapt to evolving circumstances.

Warning signs should be installed near the quench pipe outlet to clearly indicate the risks.

Consideration should be given to a suitably large sign at the outlet such that it can be clearly seen

and read at the exclusion distance versus multiple smaller signs placed at the exclusion perimeter. Figure 17 shows the example signage for this location from the IPEM MRI safety notices ([IPEM 2017](#)).

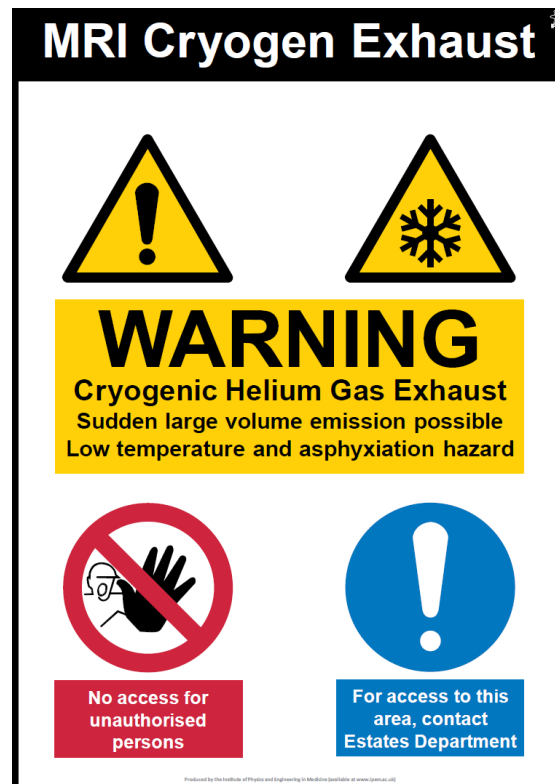


Figure 17. MRI quench pipe outlet warning signage from IPEM MRI safety notices.

#### **Real-world example: Inappropriate location of quench pipe outlet**

The quench pipe outlet was originally located in area where building work was subsequently required. To enable the building work to be performed safely, the MR scanner was ramped down and the quench pipe outlet was relocated to a more appropriate position.

**Impact:** around £50K costs to hospital, downtime of MR scanner

#### **Real-world example: Inappropriate location of quench pipe outlet**

A quench pipe was installed with the outlet located 3 metres from ground level rather than creating a general 3 metre exclusion zone. Consequently, the head of a person underneath was well within 3 metres from the outlet.

**Impact:** Physical barrier retrofitted to create 3 metre exclusion zone around the quench pipe outlet

#### **Real-world example: Inappropriate location of quench pipe outlet**

A quench pipe was installed with the outlet located in an area where access was required to service other equipment. This was identified during installation checks and the quench pipe was relocated to a more suitable location before ramp up of the MR system.

**Impact:** Minor delay to MR system ramp up

### 3.6.2 External physical barriers for access restriction.

The installation of physical barriers may be required outside of the MR suite to restrict access to certain areas for the following reasons.

- Hazardous areas such as regions of high magnetic field
- Hazardous areas around the quench pipe outlet.
- Prevent movement of large metal objects immediately adjacent to the MR suite, e.g. motor vehicles, that may otherwise negatively impact MRI image quality.

If restriction is only required for the purposes of minimising movement of large metal objects, then more aesthetic options, such as large planters, may provide sufficient obstacles. Additional warning signage to advise for the need to maintain restriction should be considered.

#### **Real-world example: Missing bollards to avoid motor vehicles driving/parking adjacent to MR suite.**

The design did not consider the need to restrict moving metal (e.g. vehicles) within a manufacturer-specific distance from the magnet iso-centre to avoid negatively impacting the quality of MR images.

**Impact: Physical bollards retrofitted at additional cost**

### 3.6.3 Chilled water supply

Superconducting MR scanners typically require a continuous supply of chilled water to keep the cold head running at all times to minimise helium boil off. Additionally, substantial cooling via the chilled water supply is generally required for various electrical equipment in the MR Technical room. Typically, the closed-circuit chilled water supply will have a single point of connection to the MR system in the MR Technical room.

The chilled water supply needs to meet the requirements of the MR manufacturer. However, strong consideration should be given to the provision of duplicate or shared load designs to allow individual chiller faults to be non-critical, particularly if minimising downtime of the MRI service is part of the project brief. Additionally, consideration should also be given to adequate maintainability of the chilled water system (e.g. appropriate bypass and filtration) to minimise disruption due to maintenance or fault. For some MR systems a backup chiller is listed as essential in the site planning guide. At least one of the main MR manufacturers reports that most new MRI installations now incorporate a backup chiller to minimise the likelihood of MR system downtime. The inclusion of sufficient flow meters and pressure gauges in pipework should be considered to allow troubleshooting of chilled water problems.

The chiller should incorporate an automatic restart after any power loss, e.g. generator testing. It may be helpful to consider further in the design, scope to accommodate the temporary installation of mobile chillers as a further backup option.

#### **Real-world example: Insufficient maintainability of chilled water system**

A scanner dedicated chilled water system was installed with a recirculating, filtered water loop. The single filter was equipped with a maintenance bypass valve, allowing periodic filter maintenance without interruption of water flow. Following a water contamination incident, frequent filter cleaning was required. While the filter was bypassed for cleaning, contaminated water entered the scanner, contaminating the scanner's heat exchanger and necessitating downtime for repair.

**Impact: In total, 10 episodes of filter blocking causing downtime, and 4 episodes of scanner heat exchanger contamination over 18 month period.**

For coastal locations, chillers utilising corrosion-resistant materials and protective coatings are recommended to ensure durability against corrosion from salt-laden air and higher humidity levels.

#### **Real-world example: Inappropriate chiller installed for coastal location.**

Original chiller was identified as inappropriate for an MR suite located close to the coast.

**Impact: Chiller replaced at an additional cost of £180,000**

Particularly if a decision is made not to go for a backup chiller, the design should consider a solution to keep the cold head running in the event of chiller failure. An option to install a mains water supply/drain into the MR Technical room as a backup cooling solution for when the chiller fails may be possible for some MR systems. Typically, such backup solutions are only sufficient to support the cold head, aiming to avoid excessive helium boil off, and not support of MRI scanning which generally requires much greater levels of cooling. It should be recognised that backup systems have scope to be utilised for extended periods of time and such options should be viewed in conjunction with local sustainability policies.



### 3.6.4 Air handling

[HTM 03-01](#) recommends any room where anaesthetic gases are planned to be administered for the purposes of general anaesthesia (e.g. induction, MR Examination room, recovery) should have ventilation at 15 air changes/hour. Any other MR Examination rooms (interventional or non-interventional), including those where anaesthetic gases are planned to be administered for the purpose of pain relief or sedation but not full anaesthesia, should be at least 10 air changes/hour. Further details on ventilation are available from [HTM 03-01](#).

The air handling design should comply with any MR manufacturer's requirements. This may include a requirement for the incoming air to the MR Examination room to contain a proportion of non-recirculated air to mitigate for the potential of helium leakage. The air handling unit should incorporate an automatic restart after any power loss, e.g. generator testing.

The MR Technical room may have a substantial need for air conditioning to avoid overheating of various electrical equipment located within. Additionally, some MR systems, particularly low-helium superconducting systems, may have an air-cooled backup for the cold head in the event of a failure of chilled water supply. These can output a significant amount of heat into the MR Technical room which can be beyond the specification of typical air conditioning units.

#### **Real-world example: Underpowered air handling unit**

MR suite was expanded to increase the number of MR systems from 1 to 2. Initially, the air handling unit was insufficient to support the larger MR suite.

**Impact: Several weeks delay to clinical use of new MR suite.**

MR systems typically have specific requirements regarding humidity levels within the MR Examination room and Technical Room, with many requiring a relative humidity of around 50% and the need to avoid both low and high extremes of humidity. If the humidity is too high then there is a negative impact on patient safety and the risk of damage to electrical components in both the MR Examination room and Technical Room from condensation. If the humidity is too low, which may be more common during the winter months, then this can have a negative impact on MRI image quality. Importantly, MR manufacturers may refuse to spend time troubleshooting image quality issues if they note humidity levels are too low. Consequently, both humidification and dehumidification are generally required.

#### **Real-world example: High humidity resulting in damage to MR system.**

A MR manufacturer identified that damaged MR system components resulted from humidity levels being above the specified humidity range.

**Impact: £60,000 cost to hospital to replace damaged components and around 2 days MR system downtime**

The location of humidity control equipment, particularly if it requires servicing, should be agreed with MR staff.

**Real-world example: Inappropriate location for humidity control unit.**

Rather than the MR Technical room or other appropriate location, the humidity control unit was installed in the MR Control Room where it took up valuable space and was an inconvenience for MR staff each time the unit was serviced. It was subsequently identified there was a lack of communication between the design/installation teams and local MR staff.

**Impact: Ongoing inconvenience for MR staff**

While many institutions may prefer to manage air temperatures centrally, e.g. via a building management system, some degree of local control may be important to support MRI scanning of certain patients, e.g. neonates. [HBN 06-01](#) recommends that any local adjustment of temperature control should be in line with those referenced in [HTM 03-01](#). An example of the various supporting plant for an MR system is shown below in Figure 18.

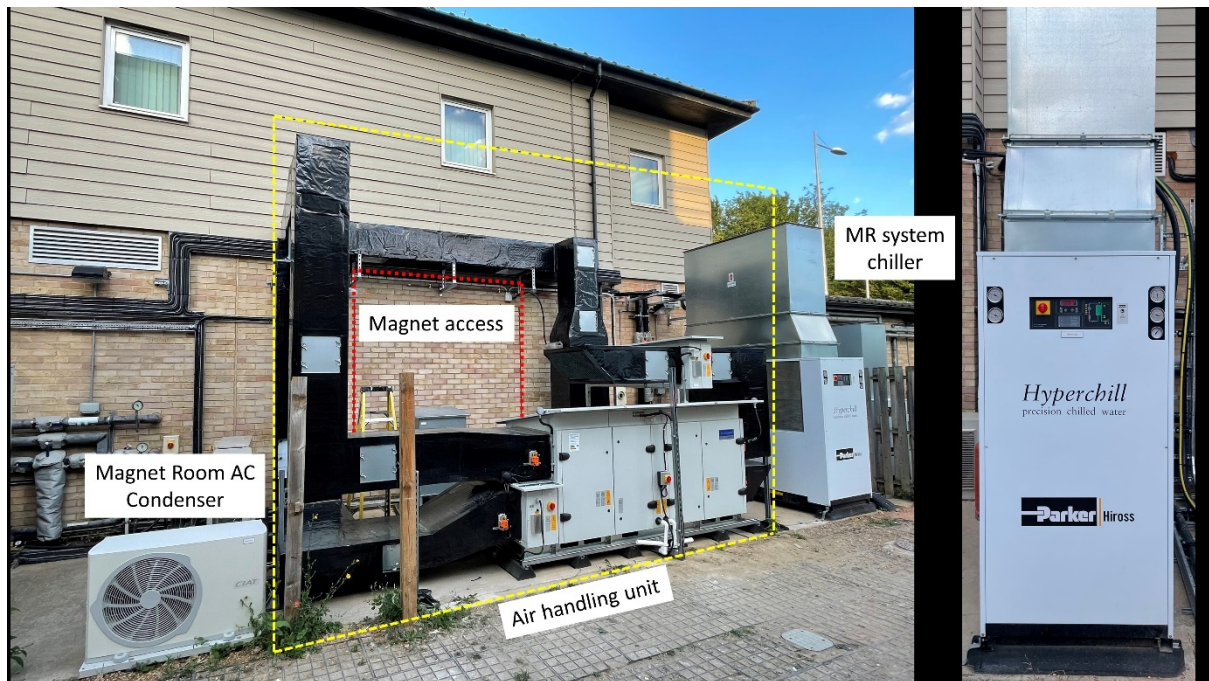


Figure 18. Example of MRI supporting plant. The air handling unit is highlighted by the yellow dotted box. Also shown is the condenser unit for the MR Examination room air conditioning and the MR chiller system that provides chilled water to the MR system heat exchanger located in the equipment room. The red dotted line partially shows the magnet access. This wall is demolished for installation/removal of the magnet.

For MR systems that include a quench pipe, it is recommended that an emergency air extract should be provided from the MR Examination room to mitigate for the possibility of helium leak. At least one MR manufacturer specifies a minimum of 12 room air exchanges per hour for the emergency air extract. The emergency extract duct should be located in the ceiling opposite the entrance to the MR Examination room to draw any potential helium escape away from the room exit. Importantly, emergency air extract systems are typically not sufficient by themselves to fully mitigate for the potential of large amounts of helium gas to be released into the MR Examination room over a short period of time (typically 10s of seconds) in the event of a magnet quench and a failure of the quench

pipe. Consequently, as discussed in the section above on the MR Examination room, other forms of room overpressure relief need to be identified and incorporated into the design. The emergency extract ducting should aim for a direct route to an external wall, ideally avoiding crossing into another fire compartment.

MHRA ([MHRA 2026](#)) advise “It is essential that an adequate number of oxygen monitors are installed and that they are regularly maintained.” MR manufacturers may provide an oxygen monitor as part of the MR system. For low helium MR systems that do not require a quench pipe, oxygen monitoring may not be required in accordance with the MR manufacturers guidance. Many oxygen detection systems are based on a chemical sensor that will need replacing multiple times through the lifetime of the MR system. To ensure that oxygen monitors can be maintained, it is important to design the location of the chemical sensor so that it is easily accessible. A common location is attached to the return air duct for the MR Examination room at a location outside of the MR Examination room, e.g. above the MR Control room.

**Real-world example: Oxygen sensor installed at a location that was too difficult/hazardous to access**

The oxygen sensor for a new MR system was installed at a location that could only be accessed via the outside of the building. This route was deemed too hazardous by maintenance engineers attending to service the oxygen sensor.

**Impact: Oxygen sensor was not replaced and eventually failed leaving the MR suite with no oxygen monitoring.**


A low oxygen alarm should automatically trigger operation of an emergency MR Examination room air extract fan to avoid any delays associated with manual initiation. Additional functionality to allow manually initiation of the emergency air extract should be considered to allow pre-emptive operation.

### 3.6.5 Electrical power supply


MR systems and supporting plant often have substantial electrical power requirements. For the MR system itself, the MR manufacturer's site planning guide will specify the design capacity of the electrical supply and any other requirements such as permissible voltage variation, phase voltage imbalance, voltage waveform distortion (harmonics) and line impedance. Other electrical equipment attached to the same electrical supply may be a source of power quality problems (HVAC, motors, pumps, generators and lift machinery) such as harmonic distortion. A power quality survey should be considered prior to the design of the electrical supply, to identify any potential problems and design mitigations. An inadequate power supply may result in nuisance tripping of circuit breakers and high levels of harmonic distortion can impact image quality.

#### **Real-world example: Insufficient quality of power supply resulting in intermittent poor image quality**

An MR scanner was attached to an electrical switch board that also supplied a large chiller unit. Noticeable ghosting on the MRI images was found to coincide with harmonics on the electricity supply that occurred when a pump in the chiller unit was operating.

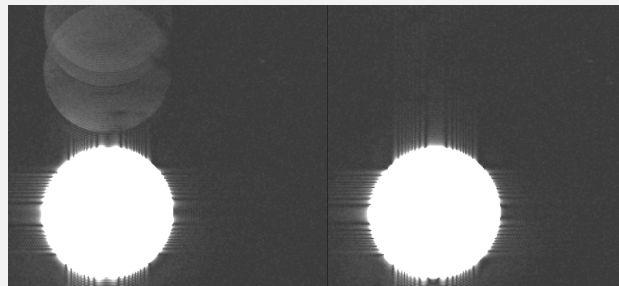

The figures below show the quality of the 3-phase electrical supply to the MR system exhibiting the ghosting artefact (left) and for a neighbouring identical MR system that was installed at the same time on a different power supply and did not exhibit the artefact (right). The measured total harmonic distortion for the affected MR scanner (left) was 4.5%. Although this was within the MR manufacturer's specification of 5%, it was noticeably greater than the supply for the neighbouring MR scanner (right).

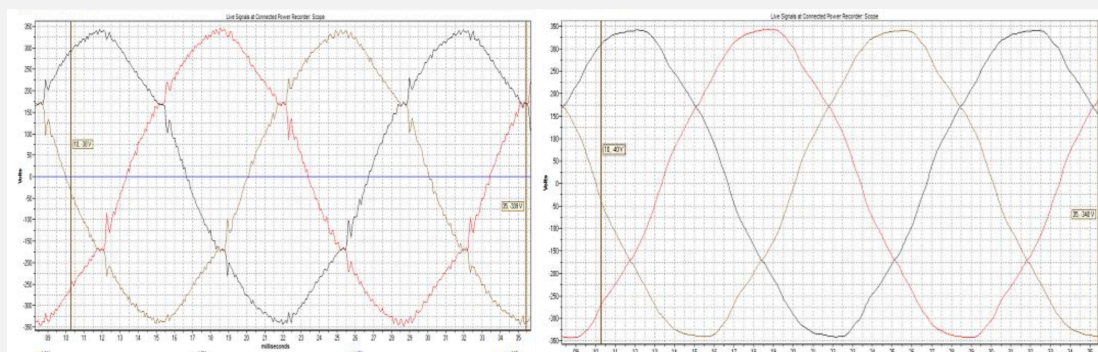

Identical Images of a test object with a basic spin echo sequence, acquired with a pump associated with the chiller unit on (left image). The noticeable ghosting was not present with the pump turned off (right image) and remained absent once a harmonic filter was fitted to the pump.

**Impact: Cost to fit a harmonic filter to the separate chiller unit.**

For replacement MR system projects it is important to check the power requirements, since these may have increased compared to the existing MR system, particularly with higher MRI gradient performance on many of the current generation of MR systems.

**Real-world example: increased power requirements for replacement MR scanner not planned for.**

This was not noticed until MR acceptance testing when the power consistently tripped when performing MRI sequences with high intensity gradient switching.

**Impact: Delays to clinical use while increased power supply was retrofitted.**

Power requirements for all other electrical equipment that is intended to be used within the MR suite should also be considered. The power supply to any equipment that is intended to be used within the MR Examination room, e.g. power injector, anaesthetic machine, patient monitoring, will be required to go through a filter into the RF cage.

Consideration should be given to secondary power supply (SPS) support, e.g. via local generator, for MR systems and other critical electrical equipment within the MR suite in the event of a failure of the primary electrical supply. [HTM 06-01](#) includes MR scanners in a list of examples that may be regarded as risk grade B with regards loss of power supply, the highest risk level below life support or complex surgery.

If the MR system is to be supported by SPS then the same support should be extended to all supporting plant. Even if a decision is made against SPS support for MR scanning, strong consideration should be given to SPS support for the chillers and cryocompressor to maintain operation of the coldhead to avoid problems with helium boil off. Prolonged periods (days) without a cryocompressor will result in a need for replacement helium, typically at additional cost to the institution. For some low helium MR systems that do not require a quench pipe, shorter power interruptions of around an hour will automatically trigger a controlled magnet quench where the helium gas is retained within the MR system. Such an event may require a few days to recover from and potentially require magnet reshimming. In cases where it is desirable to maintain the availability of MRI scanning during a mains supply failure, then the design and quality of the essential supply should be validated to ensure that the MRI equipment will operate as intended.

Tertiary power supplies such as an uninterruptible power supply (UPS) may be considered to provide short-term power to the MR system (or components of the system) and supporting plant in the event of a failure of the primary electrical supply to cover the delay before the SPS becomes available and/or allow systems to be shut down normally. [HTM 06-01](#) provides general guidance for this and power issues more generally. Provision of a UPS to maintain operation of MR scanning is substantial and is likely to be cost prohibitive in many projects. However, this may be more relevant for some installations, e.g. if interventional or intraoperative MRI scanning is planned. Specifications for an appropriate UPS may be found in MR manufacturers' site planning guides. In these cases, UPS support for the chiller should also be considered. More generally, consideration should be given to designing in UPS support for the key components of the MR system where the UPS implications are considerably less. These include the following.

- Remote monitoring systems – to ensure the MR system is continuously monitored, allowing faults to be identified and addressed promptly.
- MR console computer – to avoid data corruption.
- Power sockets within the MR Examination room, e.g. for patient monitoring.



**Real-world example: Corruption of non-UPS supported MRI host computer following mains power failure.**

As a result of an unexpected mains power failure, the MRI host computer became corrupted and required a complete rebuild to resolve.

**Impact: At least 2 days downtime associated with rebuilding of MR host computer. Loss of all changes to protocols and other settings made since the last backup was performed.**

### 3.6.6 Remote monitoring and building management systems

MR manufacturers often offer a remote monitoring service for the MR system which can help to identify problems as quickly as possible so that they can be addressed promptly with minimal negative impact. Additionally, MR manufacturers may offer different options for remote monitoring, including linking into the supporting plant to help identify problems with chilled water supplies. All remote monitoring will have certain IT requirements and it is important to recognise that local IT processes may take time to complete to ensure remote monitoring can go live shortly after the MR system is delivered.

The integration of the supporting plant into a local Building Management System (BMS) can be valuable for identifying faults early, particularly when the scanner is not in use. Where environmental conditions are monitored or adjusted remotely, consideration should be given to providing additional local controls—for example, allowing limited-range temperature adjustments within the MR Examination room.

Clear escalation procedures should be planned to ensure that the local MRI service understands the extent of BMS integration and the associated response processes (e.g., communication routes, monitoring periods such as 24-hour observation, and required response times). Additional local protocols should also be established to guide staff when faults are detected before any BMS alarm-driven actions are initiated. Departments responsible for managing the BMS should understand the required actions and response times for each fault type linked into the system.

Potential use of the MR suite outside core hours, e.g. extended hours and on-call cases, should be considered as part of a BMS-managed air handling unit to avoid incidents where operation is reduced/disabled when required.

### 3.6.7 IT options & configuration

Standard IT considerations should be made for the MR suite such as the location of sufficient numbers of ethernet ports. Since MR scanning acquires increasing larger amounts of data, consideration should be given to meeting current and future demands for network speed, particularly where radiologist review of images may be required to advise on additional imaging/conclusion of the exam.

Additionally, sites are encouraged to consider potential IT related options for the MR system which may help to support better workflows. These include the following.

- Worklists. Some MR systems provide functionality for multiple worklists.
- DICOM nodes. Connections to other DICOM nodes in addition to PACS. For each DICOM node, various options may be available, including the following.
  - Query/retrieve
  - Automatic send/archive of DICOMs. Some MR systems offer functionality to auto-send selected data based on specific DICOM tags.

- DICOM Storage Commitment – provides confirmation message back to the MR system that DICOMs have been received successfully.
- MPPS (Modality Performed Procedure Step).
- DICOM Study Description. Some MR systems offer an option to set this to match the Requested procedure from the worklist instead of the user-selected exam protocol.
- Enhanced DICOM. This offers many advantages over what is often referred to as standard or classic DICOM, including faster data transfer and capture of additional information in the DICOM metadata. However, although Enhanced DICOM was introduced in the mid-2000s there are some IT systems that may not support this. Sites should consider not only their PACS, but other 3<sup>rd</sup> party systems in use within the local organisation. Workaround options to produce standard DICOM versions of datasets when required should be considered. This may be relevant when considering the need for transfer of DICOMs between institutions.
- NTP (network time protocol) server. Linking the MR system to an available NTP server helps to ensure an accurate time on the MRI host computer and subsequently an accurate time stamp on DICOM images which may be important for certain applications. Even if accurate at installation, without a link to an NTP server, the MR system clock may drift significantly over the lifetime of the MR scanner.
- Remote monitoring options. The MR manufacturer should be able to provide requirements for network connections and institutional firewalls to allow them to remotely connect and monitor the MR system. Some remote monitoring options may place additional requirements on the design, e.g. power socket and a network connection in the MR Technical room.
- Additional options for connected DVDs, USB drives, network shares and printers.

MR manufacturers provide DICOM conformance statements which may help to understand some of the options available. To allow setup of workflows for MR scanning, sites will be required to pass on details of basic IT options (RIS worklist, PACS) to the MR manufacturer so that they can be configured during installation.

A network connection between the MR system and any associated workstations to the MR manufacturer is used for remote monitoring, technical and applications support. The MR manufacturer should provide details regarding local firewall configurations that are required to enable remote connection. Project managers should plan for change requests to be submitted to local IT teams in a timely manner to help ensure approvals can be obtained to ensure changes are implemented when required. For conventional superconducting MR systems, it is particularly important for this to be in place by the time of delivery, as remote monitoring is a key mitigation for certain issues that can result in significant additional cost and delays if not addressed in a timely manner.

#### **Real-world example: delays in firewall configuration to enable remote monitoring**

Network firewall changes required to enable the MR manufacturer to remotely connect to the MR scanner to monitor its status were not in place when the magnet quenched shortly after installation. The magnet quench happened on Friday evening was not discovered until staff returned on the following week. During this time ice had formed in the magnet cryostat. This required extensive work to remove and cool the magnet down.

**Impact: Approx £150K additional cost to project. Approx 2 weeks delay to project**

### 3.7 Summary & checklist

|                                                                                                                                                                                                      |   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Design team</a>                                                                                                                                                                          | ✓ |
| Design team includes representation from all professional groups to cover the technical aspects of the design, ideally with previous experience of MRI installations?                                |   |
| All individuals from these professional groups have previous experience of MRI installations or access to support from colleagues with such experience.                                              |   |
| Design team includes representation from all the different clinical groups that are intended to use the space?                                                                                       |   |
| Clinical staff within design team allocated sufficient time to allow them to fully engage and contribute to the design team?                                                                         |   |
| Design team have been provided with the 'golden thread' building information (e.g. power supply, water supply, structural information, fire safety information, etc) to satisfy Building Safety Act? |   |
| Design team confirmed the final design meets the project brief?                                                                                                                                      |   |

|                                                                                                                                             |   |
|---------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">MR suite layout and general design</a>                                                                                          | ✓ |
| General design options to make the space more patient-friendly considered?                                                                  |   |
| The <a href="#">MR Controlled Access Area</a> is appropriately defined?                                                                     |   |
| Number of entry points to <a href="#">MR Controlled Access Area</a> are minimised?                                                          |   |
| Doors to <a href="#">MR Controlled Access Area</a> are self-closing and self-locking?                                                       |   |
| The <a href="#">MR Controlled Access Area</a> cannot be used as a shortcut to unrelated destinations?                                       |   |
| The <a href="#">MR Environment</a> is appropriately defined?                                                                                |   |
| Appropriate signage for <a href="#">MR Controlled Access Area</a> and <a href="#">MR Environment</a> ?                                      |   |
| Appropriate definition of fire zones?                                                                                                       |   |
| Consideration of how a general fire alarm in the hospital will impact on access control for the <a href="#">MR Controlled Access Area</a> ? |   |
| Non-ferromagnetic fire extinguishers planned throughout the <a href="#">MR Controlled Access Area</a> or whole MR suite?                    |   |
| Delivery route of MR scanner(s) identified and preserved for future scanner replacement and removal at end of life?                         |   |
| Storage location identified for emergency evacuation equipment?                                                                             |   |
| Space available for resuscitation team attendance outside MR Environment?                                                                   |   |

|                                                                |   |
|----------------------------------------------------------------|---|
| <a href="#">Reception and waiting area</a>                     | ✓ |
| Sufficient seating?                                            |   |
| Appropriate location relative to interview and changing rooms? |   |

|                                                                                                            |   |
|------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Pre-change preparation area</a>                                                                | ✓ |
| Additional space for MRI simulator preparation?                                                            |   |
| Appropriate space identified for programming implanted devices (e.g. CIEDs, neurostimulators) if required? |   |

|                                                          |   |
|----------------------------------------------------------|---|
| <a href="#">Patient screening areas / interview room</a> | ✓ |
| Appropriate auditory and visual privacy?                 |   |



|                                                                       |  |
|-----------------------------------------------------------------------|--|
| Support for current/future electronic patient screening requirements? |  |
|-----------------------------------------------------------------------|--|

|                                                                                                                                                   |   |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Patient transfer area</a>                                                                                                             | ✓ |
| Defined location inside/outside of <a href="#">MR Controlled Access Area</a> after operational and MR safety considerations?                      |   |
| Location for safe storage of trolleys and wheelchairs that are unsafe for MRI, preferably outside the <a href="#">MR Controlled Access Area</a> ? |   |
| Consideration of patient hoist?                                                                                                                   |   |

|                                                                                                                         |   |
|-------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Patient changing rooms</a>                                                                                  | ✓ |
| Enough rooms to accommodate planned patient throughput, including consideration of potential future patient throughput? |   |
| Lockers for patients to securely store clothing and personal items?                                                     |   |
| Consideration of non-ferromagnetic locker keys?                                                                         |   |
| Storage space for both clean and used <a href="#">MR Safe</a> clothing?                                                 |   |
| Space for patients in wheelchairs?                                                                                      |   |
| Nurse call?                                                                                                             |   |
| Ability to gain access to room in an emergency?                                                                         |   |

|                                                                                                                                        |   |
|----------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Sub-waiting area</a>                                                                                                       | ✓ |
| Appropriate access to patient toilets?                                                                                                 |   |
| Space for patients in wheelchairs?                                                                                                     |   |
| Consideration of ferromagnetic detection system to support screening prior to entry to the <a href="#">MR Controlled Access Area</a> ? |   |

|                                                                                                                                                 |   |
|-------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Patient preparation area</a>                                                                                                        | ✓ |
| Enough cannulation chairs?                                                                                                                      |   |
| Sufficient space to allow easy manoeuvring of an <a href="#">MR Conditional</a> trolley or dockable MR table in/out of the MR Examination room? |   |
| Patient preparation area directly visible from MR Control room?                                                                                 |   |
| Sufficient space for sedation/anaesthetic induction and recovery?                                                                               |   |
| Provision of medical gases considered?                                                                                                          |   |
| Sufficient space for general patient recovery if no separate recovery area?                                                                     |   |
| Sufficient space for patient transfer if there is no dedicated space for this outside of the <a href="#">MR Controlled Access Area</a> ?        |   |
| Sufficient space for inpatient MR safety screening if there is no dedicated interview area for this patient cohort?                             |   |
| Sufficient space for 'holding area' whilst an inpatient is waiting to return to the ward?                                                       |   |
| Additional WC within the <a href="#">MR Controlled Access Area</a> considered?                                                                  |   |

|                                                                                                                                          |   |
|------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">MR Examination room</a>                                                                                                      | ✓ |
| MR manufacturers requirements for space are met?                                                                                         |   |
| Proposed position of MR scanner meets MR manufacturer's specifications for proximity to items that may impact performance of MR imaging? |   |
| Proposed position of MR scanner to nearby equipment that may be adversely impacted by the fringe magnetic field considered?              |   |

|                                                                                                                                                                                                                                                                  |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Sufficient space for easy and safe transfer of all patients in/out of the MR Examination room and on/off the MR scanner table including in an emergency patient evacuation?                                                                                      |  |
| Sufficient space for required scanner table movement?                                                                                                                                                                                                            |  |
| Sufficient space to accommodate all equipment to support all planned MR procedures, e.g. power injectors, anaesthetic machines, monitoring, biopsy, radiotherapy planning lasers                                                                                 |  |
| Position of MR scanner and location of window into MR Control room provide a clear view down the scanner bore from the MR Control room?                                                                                                                          |  |
| Provision of medical gases?                                                                                                                                                                                                                                      |  |
| Consideration of anti-vibration pads?                                                                                                                                                                                                                            |  |
| Consideration of all relevant frequencies for RF cage testing if multi-nuclear MR system?                                                                                                                                                                        |  |
| Concrete slab is appropriate depth to accommodate RF cage to avoid step into the MR Examination room?                                                                                                                                                            |  |
| Concrete slab is sufficiently flat for the RF cage?                                                                                                                                                                                                              |  |
| Concrete slab is sufficiently cured to accommodate the RF cage?                                                                                                                                                                                                  |  |
| Building is sufficiently weather-tight to support building of RF cage?                                                                                                                                                                                           |  |
| Location and size of all waveguides confirmed with the intended users?                                                                                                                                                                                           |  |
| Consideration of waveguide solutions within MR Examination room door allowing placement of non-conducting lines without disconnecting from patient?                                                                                                              |  |
| Consideration of additional penetration panel for future use?                                                                                                                                                                                                    |  |
| Consideration of additional penetration panels in RF cage for connections into the MR Examination room that are not the responsibility of the MR manufacturer?                                                                                                   |  |
| MR manufacturer's specifications met for minimum distance between the MR system penetration panel and other penetration panels?                                                                                                                                  |  |
| Sufficient clearance around penetration panels to allow access for future modifications?                                                                                                                                                                         |  |
| Single common earth/equipotential bonding strategy approved by MR manufacturer?                                                                                                                                                                                  |  |
|                                                                                                                                                                                                                                                                  |  |
| Appropriate signage on and around MR Examination room door?                                                                                                                                                                                                      |  |
| Consideration of retractable belt barrier outside MR Examination room?                                                                                                                                                                                           |  |
| Door warning floor signage considered?                                                                                                                                                                                                                           |  |
|                                                                                                                                                                                                                                                                  |  |
| For MR system with quench pipes, consideration of mitigations for room over-pressure?                                                                                                                                                                            |  |
| Consideration of mitigation options for MR Examination room door failure?                                                                                                                                                                                        |  |
|                                                                                                                                                                                                                                                                  |  |
| Consideration of the potential need for magnetic shielding from default plans of MRI fringe field (not taking local structure into account)?                                                                                                                     |  |
| If required, calculations performed taking local structural environment into account for the MRI fringe fields and any required magnetic shielding to reduce extent of <a href="#">B<sub>0</sub> Hazard Area</a> into areas adjacent to the MR Examination room? |  |
| Confirmation structure can support the required magnetic shielding?                                                                                                                                                                                              |  |
| Confirmation location of magnetic shielding is compliant with MR manufacturer's specifications?                                                                                                                                                                  |  |
|                                                                                                                                                                                                                                                                  |  |
| Consideration of acoustic noise transmission to areas outside of the MR suite?                                                                                                                                                                                   |  |
| Consideration of acoustic noise protection within the MR suite?                                                                                                                                                                                                  |  |
|                                                                                                                                                                                                                                                                  |  |
| Sufficient patient privacy during MRI examination?                                                                                                                                                                                                               |  |
|                                                                                                                                                                                                                                                                  |  |
| LED lighting suitable for MR Examination rooms?                                                                                                                                                                                                                  |  |
| LED lighting with sufficient lux levels?                                                                                                                                                                                                                         |  |
| LED lighting with appropriate colour rendering index (CRI)?                                                                                                                                                                                                      |  |

|                                                                                                       |  |
|-------------------------------------------------------------------------------------------------------|--|
| Consideration of dimmable/coloured lighting?                                                          |  |
| Light switch located outside the MR Examination room?                                                 |  |
| Consideration of emergency lighting?                                                                  |  |
| Consideration of artificial skylights and illuminated wall panels?                                    |  |
| Consideration of patient video system?                                                                |  |
| Suitable floor demarcation?                                                                           |  |
| Consideration of fitted hooks/anchor points in the walls                                              |  |
|                                                                                                       |  |
| Adequate storage for MRI equipment and consumables including consideration of manual handling issues? |  |
| Consideration of mains power sockets in the room?                                                     |  |
| Consideration of network ports in the room?                                                           |  |
|                                                                                                       |  |
| Appropriate location of emergency stop buttons?                                                       |  |
| Protective guard for emergency stop buttons?                                                          |  |
| Appropriate signage for emergency stop buttons?                                                       |  |

|                                                                    |   |
|--------------------------------------------------------------------|---|
| <a href="#">Recovery area</a>                                      | ✓ |
| If anaesthetic recovery planned, piped oxygen and suction planned? |   |
| Sufficient size for expected patient throughput and staffing       |   |
| Sufficient size for activities (e.g. any transfers etc)?           |   |

|                                                                                                                          |   |
|--------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">MR Control room</a>                                                                                          | ✓ |
| Sufficient size to allow accommodation of the full range of expected occupancies (including anaesthetics where planned)? |   |
| CCTV considered where direct line of sight supervision is not achievable?                                                |   |
| Direct line of sight to the area immediately outside of the MR Examination room door?                                    |   |
| Consideration of patient privacy and background noise if shared MR Control rooms are planned?                            |   |
| Dimmable room lighting?                                                                                                  |   |
| Consideration of window blinds/switchable opaque glass for patient confidentiality?                                      |   |
| Consideration of control/alarm panels including HVAC status, oxygen alarm, chiller mimic panel                           |   |
| All control/alarm panels appropriately labelled?                                                                         |   |
| Appropriate location of emergency stop buttons?                                                                          |   |
| Emergency stop buttons appropriately labelled?                                                                           |   |
| Sufficient number and position of power sockets and network ports?                                                       |   |


|                                                                                                                                                                        |   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">MR Technical room</a>                                                                                                                                      | ✓ |
| Complies with MR manufacturer's minimum space requirements?                                                                                                            |   |
| Position of electronic cabinets comply with MR manufacturer's requirements for distance to MR scanner?                                                                 |   |
| Distance between electronic cabinets supporting MR scanners at the same nominal field strength comply with any MR manufacturer's requirements for separation distance? |   |
| Consideration of drip tray installation above electronic cabinets & associated leak detection alarm?                                                                   |   |

|                                           |  |
|-------------------------------------------|--|
| Sufficient mains plugs and network ports? |  |
|-------------------------------------------|--|

|                                                                  |   |
|------------------------------------------------------------------|---|
| <a href="#">Cleaning/storage/staff changing</a>                  | ✓ |
| Sufficient storage space for cleaning equipment and other items? |   |
| Sufficient space for staff changing?                             |   |

|                                                                                                                                   |   |
|-----------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Supporting plant</a>                                                                                                  | ✓ |
| Quench pipe design complies with requirements of the MR manufacturer?                                                             |   |
| Appropriate exclusion zone including consideration of physical barriers around quench pipe outlet?                                |   |
| Appropriate warning signage around quench pipe outlet?                                                                            |   |
|                                                                                                                                   |   |
| Consideration of physical barriers to increase distance of moving motor vehicles near MR suite?                                   |   |
|                                                                                                                                   |   |
| Chilled water supply meets the MR manufacturer's requirements?                                                                    |   |
| Consideration of duplicate/shared load chiller designs?                                                                           |   |
| Sufficient flow meters and pressure gauges to support troubleshooting?                                                            |   |
| Consideration to design in scope for integrating mobile chillers as backup solution?                                              |   |
| Appropriate chiller options if coastal location?                                                                                  |   |
| Consideration of mains water backup to maintain cold head operation?                                                              |   |
|                                                                                                                                   |   |
| Air handling design complies with <a href="#">HTM 03-01</a> ?                                                                     |   |
| Air handling meets MR manufacturer's requirements?                                                                                |   |
| Humidity control design to meet MR manufacturer's requirements?                                                                   |   |
| Location of humidity control equipment appropriate for MR staff?                                                                  |   |
| Consideration of local control for MR Examination room temperature?                                                               |   |
| For MR systems with quench pipe, appropriate emergency extract system, including position of extract duct in MR Examination room? |   |
| For MR systems with quench pipe, oxygen monitor planned with an automatic trigger of emergency air extract?                       |   |
| Oxygen sensor positioned to allow safe and routine maintenance access throughout system life?                                     |   |
|                                                                                                                                   |   |
| Electrical power supply meets MR manufacturer's requirements?                                                                     |   |
| Consideration of secondary power supply support?                                                                                  |   |
| Consideration of battery (UPS) backup for key items of equipment?                                                                 |   |
|                                                                                                                                   |   |
| Clarity with MR staff regarding BMS operation and fault reporting?                                                                |   |
| Potential use of MR suite outside core hour considered for BMS-managed air handling unit?                                         |   |
|                                                                                                                                   |   |
| Consideration of MR system IT options?                                                                                            |   |
| Timely submission of MR manufacturer's IT requirements to local IT teams planned?                                                 |   |

## 4 Build (RIBA stage 5)



### 4.1 Introduction

This section covers the building works associated with a new MRI installation, prior to the delivery and installation of the MR system. The involvement of multiple contractors at this stage of the project requires careful coordination and effective communication to ensure details of the design are fully realised as intended and that unexpected issues are managed appropriately. This may be particularly important for non-turnkey installations if one or more contractors have no or limited previous experience of working on new MRI installations with the additional issues that they need to consider.

Project plans should include sufficient time during the build stage to allow for equipment installation and commissioning before key timepoints, in particular the delivery of the magnet and subsequently the magnet ramp-up. These two timepoints form two of the subsections below, together with further subsections on issues associated with the removal of a previous MR system, a new RF cage and the magnet quench pipe.

If some aspects of the build are required to overlap with the installation of the MR system, then this should be planned with the MR manufacturer in advance, especially if there is a need to ramp the magnet down for certain items to be completed. If looking to do any such work with magnet at field, then there will be a need to implement appropriate screening of individuals and equipment. Additionally, it is important to incorporate reasonable contingency within the plan to help ensure unexpected problems can be accommodated in a timely manner, ideally avoiding the need to delay subsequent steps in the project that in turn can result in much more substantial delays to overall project completion.

It is important for the project team to meet regularly during the build phase, although frequency may vary, e.g. monthly for pre-commencement, then weekly for the final stages. These meetings are opportunities to discuss general progress, any issues arising such as unexpected delays and necessary re-scheduling, and to make any final decisions on design. It is helpful to provide the project team with an up-to-date schedule of installation and commissioning (e.g. as a Gantt chart or spreadsheet) so that any delays and scheduled activities are shared and planned for in terms of availability of other staff groups/contractors, applications training and ultimately planning for the first clinical lists following handover. Examples of items that might appear in such a schedule are listed below in Table 3.

| Activity                                                        | typical duration [days] | Comments                                               |
|-----------------------------------------------------------------|-------------------------|--------------------------------------------------------|
| Consider: Helium fill and QA if redundant system being sold     | 2                       |                                                        |
| Decommissioning and ramp down of old MR system (if appropriate) | 1-2                     | For replacement of a current MR system                 |
| Erection of structural scaffolding access and landing platform  | 1-3                     | For systems <i>not</i> being installed on ground floor |

|                                                                                        |                |                                                                                                   |
|----------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------------------|
| Form MRI entry/exit panel                                                              | 1-2            |                                                                                                   |
| Remove old MR system & existing chiller                                                | 1-3            | For replacement of a current MR system                                                            |
| Strip existing RF cage structure & associated mechanical & electrical works throughout | 10-20          |                                                                                                   |
| Check and form floor levels & service openings to walls                                |                |                                                                                                   |
| Take down existing walls and install new                                               |                |                                                                                                   |
| 1 <sup>st</sup> mechanical and electrical installation                                 | 3-8            |                                                                                                   |
| Install RF cage and carry out RF cage test                                             | 5-8            |                                                                                                   |
| Form filter cupboard in cage                                                           | 1-2            |                                                                                                   |
| Plasterboard & plastering throughout                                                   | 3-5            |                                                                                                   |
| Doors & joinery fitted furniture                                                       | 2-5            |                                                                                                   |
| Electrical mains GO LIVE date                                                          | Milestone date |                                                                                                   |
| Suspended ceiling grids                                                                | 1-2            |                                                                                                   |
| 2 <sup>nd</sup> mechanical and electrical installation                                 | 2-5            |                                                                                                   |
| Install LED lighting                                                                   | 1-2            |                                                                                                   |
| Mechanical, electrical commissioning                                                   | 1-5            |                                                                                                   |
| Decoration throughout                                                                  | 2-5            |                                                                                                   |
| Floor coverings throughout                                                             | 2-4            | Install permanent floor markings of magnetic field isocontours in MR Examination room if required |
| Medical gases, scanner ventilation works                                               | 1-5            | Preferably prior scanner delivery                                                                 |
| Delivery checks                                                                        | 1              | Prior MRI release for shipment                                                                    |
| Snagging (also known as a punch list)                                                  | 1-3            |                                                                                                   |

Table 3. Example activities associated with the build phase of a new MRI installation project.

## 4.2 Removal of old MR system

For replacement MR scanner projects that include a new RF cage, there will be a need to remove the old MR scanner near the start of the building works before arrival of the new MR scanner. Projects where the existing RF cage is being retained may provide scope for the removal of the old scanner and delivery of the new MR scanner to occur around the same time, e.g. over a single weekend, utilising the same exit/delivery route including scaffolding, creation of MRI entry/exit panels, propping and ramps as well as a single crane event. However, this may limit the scope to deal with unexpected issues.

Typically, decommissioning, ramp down and removal of an existing MR scanner will be organised by the MR manufacturer of the new MR system, although this may be subcontracted to specialists dealing in used MRI equipment.

## 4.3 RF cage

When the main building structure is ready, construction of the RF cage is one of the first items in the build phase. Typically, the MR manufacturer's specifications for the RF cage are confirmed by the RF cage manufacturer immediately after the cage has been built and then again immediately after the RF cage is resealed following delivery of the MR scanner. These measurements are performed with the RF cage disconnected from the earth reference point, allowing an electrical resistance measurement to be taken to demonstrate the absence of any additional earthing. It may be helpful for a member of the physics team that will be performing the acceptance testing to witness these measurements on behalf of the [MR Responsible Organisation](#). An RF cage certificate documenting the results should be provided demonstrating that the system complies with the manufacturers required shielding effectiveness. An example of this is shown in Figure 19.

| <b>TO:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                        | <b>TESTING RESULTS</b>                                                                                                                                                         |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|--------------------------|--|-------------|----------------------------------|--------|-------------------------------|------|----------------------------------------------------------------------------------------|--------------------|------------|----------|-----------|----------|------------|-------------|--------|---------|-------------------------------------------------------|------------------------------|------------|
| <b>ATTN:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                        | <b>FREQUENCY</b>                                                                                                                                                               |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| <b>FROM:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                        | <b>E@30MHz</b>                                                                                                                                                                 | <b>E@63MHz</b> | <b>E@128MHz</b> |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| <b>Our Ref:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                        |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| <b>Date:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                        |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| <b>Dear [REDACTED]</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                        |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| I am pleased to provide you with the following protocol from 2 <sup>nd</sup> RF cage testing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                        |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| <table border="1"><thead><tr><th colspan="2">RF CAGE TESTING PROTOCOL</th></tr></thead><tbody><tr><td>TEST NUMBER</td><td>PSE-21-11 (2<sup>nd</sup> test)</td></tr><tr><td>CLIENT</td><td>APOLLO BUILDING SERVICES Ltd.</td></tr><tr><td>SITE</td><td>FLOOR LEVEL : N/A<br/>CAGE MANUFACTURER : Flux Medical Ltd.<br/>CABIN TYPE : Copper&amp;wood</td></tr><tr><td>DATE OF RF TESTING</td><td>07.05.2021</td></tr><tr><td>STANDARD</td><td>EN50147-1</td></tr><tr><td>ENGINEER</td><td>[REDACTED]</td></tr><tr><td>TEST RESULT</td><td>PASSED</td></tr><tr><td>COMMENT</td><td>RF cage complete. MRI inside, fit out done by others.</td></tr><tr><td>DATE OF PROTOCOL PREPARATION</td><td>13.05.2021</td></tr></tbody></table> |                                                                                        |                                                                                                                                                                                |                |                 | RF CAGE TESTING PROTOCOL |  | TEST NUMBER | PSE-21-11 (2 <sup>nd</sup> test) | CLIENT | APOLLO BUILDING SERVICES Ltd. | SITE | FLOOR LEVEL : N/A<br>CAGE MANUFACTURER : Flux Medical Ltd.<br>CABIN TYPE : Copper&wood | DATE OF RF TESTING | 07.05.2021 | STANDARD | EN50147-1 | ENGINEER | [REDACTED] | TEST RESULT | PASSED | COMMENT | RF cage complete. MRI inside, fit out done by others. | DATE OF PROTOCOL PREPARATION | 13.05.2021 |
| RF CAGE TESTING PROTOCOL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                        |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| TEST NUMBER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | PSE-21-11 (2 <sup>nd</sup> test)                                                       |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| CLIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | APOLLO BUILDING SERVICES Ltd.                                                          |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| SITE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | FLOOR LEVEL : N/A<br>CAGE MANUFACTURER : Flux Medical Ltd.<br>CABIN TYPE : Copper&wood |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| DATE OF RF TESTING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 07.05.2021                                                                             |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| STANDARD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | EN50147-1                                                                              |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| ENGINEER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | [REDACTED]                                                                             |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| TEST RESULT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | PASSED                                                                                 |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| COMMENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | RF cage complete. MRI inside, fit out done by others.                                  |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
| DATE OF PROTOCOL PREPARATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 13.05.2021                                                                             |                                                                                                                                                                                |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                        | Dynamic range of testing set (DR) was 115dB at E@30MHz.<br>Dynamic range of testing set (DR) was 114dB at E@63MHz.<br>Dynamic range of testing set (DR) was 112dB at E@128MHz. |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                        | With kind regards,<br>[REDACTED]                                                                                                                                               |                |                 |                          |  |             |                                  |        |                               |      |                                                                                        |                    |            |          |           |          |            |             |        |         |                                                       |                              |            |

| MEASURING POINT                | FREQUENCY |         |          |
|--------------------------------|-----------|---------|----------|
|                                | E@30MHz   | E@63MHz | E@128MHz |
| RF DOOR                        | 104dB     | 104dB   | 101dB    |
| RF WINDOW                      | 103dB     | 101dB   | 100dB    |
| FILTERPLATE (with filterplate) | 104dB     | 105dB   | 100dB    |
| WALL                           | 111dB     | 108dB   | 103dB    |

Figure 19. Example RF cage results, showing the shielding effectiveness at 30 MHz, 63 MHz and 128 MHz, demonstrating all results were greater than 100 dB.

At this point, it is recommended to confirm that all planned waveguides and filter panels to support connections to third party equipment (e.g. injector/projectors, TV screen, medical gases) have been installed according to the design, before installation of walls and decoration work within the MR Examination room.



**Real-world example: Missing RF waveguide was not picked up until building works had completed.**

RF waveguides indicated on the original plan were not installed. This omission was not picked up until after the building and decoration of the MR Examination room had completed.

**Impact: Avoidable added time & cost associated with installation of RF waveguide: Ramp down MRI magnet, additional work to stud walls to gain access to RF cage, then repairs after waveguide fitted.**

**Real-world example: Medical gases not replaced**

For a replacement MRI installation that involved a new RF cage room, the anaesthetics gases were not reinstalled. It was assumed by MR staff that the room was to be refurbished with like for like, but it was unclear if this was included within the design.

**Impact: additional costs to retrofit, delays in clinical use**

Since confirmation of RF cage performance is made prior to the remaining building & decoration of the MR Examination room and the installation of supporting services, various practical measures are recommended to help avoid unintentionally compromising the performance of the RF cage. These include the following.

- Temporary removal of the RF finger contact springs at the bottom of the MR Examination room door to avoid potential damage arising from opening/closing the door over any trailing cables on the floor immediately outside of the MR Examination room door. Importantly, any such changes to the RF cage need to be reinstated prior to a follow up RF cage check and final handover to the customer.
- Connecting the RF cage to an electrical continuity tester that will generate an audible alarm if a path to earth is inadvertently made during the remainder of the building works. This is strongly advised to immediately flag any such problem, avoiding the potentially very difficult task of identifying them after all the building works have completed.
- Avoidance of any loose metal connections, since these can produce discharges of RF interference, appearing as RF spike artefacts on the MR images and degrading diagnostic quality. The suspended ceiling should be fixed. Suspension via movable clamps or springs should be avoided. Similarly, any cabling in the ceiling void should be fixed to appropriately secure cable trays and mounting brackets. Loose cables trailing on the suspended ceiling within the RF cage as demonstrated in Figure 20 are known to be a source of RF spikes and should be avoided.



*Figure 20. Loose cables trailing on the suspended ceiling within the RF cage are known to be a source of RF spikes and should be avoided by use of secure cable trays and mounting brackets.*

Importantly, the use of any ferromagnetic materials/components during the subsequent building works within the RF cage should be avoided, since these may present a projectile risk when the MRI magnet is ramped up.

**Real-world example: ferromagnetic screws used within MR Examination room.**

Ferromagnetic screws were used for fixings within the MR Examination room. During a routine inspection of the quench pipe, a ceiling tile bracket was dislodged and was pulled into the MR scanner, narrowly missing the MR engineer and causing some superficial damage to the outer covers of the scanner.

**Impact: Cost & time associated with ramping magnet down, replacing all ferromagnetic fixings and ramping magnet back up.**

Finally, RF cage performance may already have dropped by the time the MRI installation has completed and is ready to hand over to the customer ([Small et al. 2026](#)). Consequently, consideration should be given to planning for a repeat RF cage test once all building work and installation of the MR scanner has completed to confirm the performance of the RF cage is still appropriate.

#### 4.4 Quench pipe

For MR systems that incorporate a quench pipe, the following steps are recommended to be taken at installation to confirm that the quench pipe has been installed correctly and to support ongoing annual inspections.

- Obtain confirmation from the MR manufacturer that the MRI quench pipe has been installed to their specification.
- Perform a risk assessment if required for accessing locations to visually inspect the quench pipe outlet. Potential mitigations may include introducing a permit to work system for the area immediately around the quench pipe outlet.

- Perform a visual inspection of the quench pipe outlet, taking photographic evidence of the following to support subsequent annual check.
  - Access to quench pipe outlet is appropriately controlled
  - No obstructions to the quench pipe outlet
  - Any rain covers/protective mesh are in place
  - Appropriate signage is in place, e.g. [IPEM 2017](#).
  - Area below the outlet appropriate to mitigate risk of exposure to cryogenic gases in the event of an MRI quench, e.g. open windows, sufficient distance to public spaces.
- Perform a visual inspection of as much of the quench pipe as is practical to do so, taking photographic evidence of the following to support subsequent annual check
  - Insulation
  - Hazard warning tape

#### **Real-world example: Incorrect location for quench pipe outlet**

The quench pipe outlet was planned to be located 3 metres above head height, but was fitted 3 metres above ground level.

**Impact: additional works to increase height of quench pipe outlet. Minor delay in magnet ramp up and clinical use.**

## **4.5 Build requirements prior to MR scanner delivery**

Timely commissioning of items within the build phase of the project is key to help identify issues as early as possible. This is important as missing opportunities to perform any remedial work prior to key timepoints in the project can greatly increase overall delays with an associated greater cost. One of the key timepoints in the project timeline is the delivery of the MR scanner.

Conventional superconducting MR scanners require a connection to power and a chilled water supply when they arrive on site to minimise helium boil off. Consequently, water chillers should be installed and commissioned and all chilled water pipework fully pressure tested and flushed with clean filters prior to MRI delivery. Ideally, any planned backup chilled water supply with the associated changeover mechanism should also be fully installed, commissioned and ready to use if needed by the time of MRI delivery. The mains electrical cable for the MR system should have been routed and be ready to connect to the MR system.

Installation and commissioning of the RF cage should have completed, including confirmation of expected non-MR manufacturer waveguides and filter panels. An opening in the RF cage will then need to be made, sufficient in size to bring the MR scanner into the room.

The HVAC, including all ductwork, should also be fully installed and commissioned prior to magnet delivery. Additionally, the oxygen monitor should be installed and commissioned, including confirmation that a low oxygen alarm automatically triggers the emergency air extract mechanism from the MR Examination room.

**Real-world example: Emergency extract continuously drawing cold air into MR Examination room**

During winter, the cold temperature of the MR Examination room was impacting on clinical MRI. Eventually, it was identified that the emergency extract system was incorrectly configured and this had not been picked up at commissioning. The emergency extract system was reconfigured to correct operation.

**Impact: Reduced capacity and delays to patient scans**

MR Examination room lighting should be fully installed and commissioned. Ideally, all fire compartmentation works should also have been completed.

**Real-world example: Poor communication between installation parties**

An issue with external RF interference and image artefacts was identified to arise from some additional lighting within the MR Examination room lighting aimed at improving the patient experience, but access to the control box was blocked by the subsequent installation of pipework. Consequently, these lights were permanently turned off.

**Impact: Unusable lighting system, impaired patient experience**

Local network connections and IT firewall changes should be in place to allow the MR engineers to configure remote monitoring of the MR system by the MR manufacturer soon after magnet delivery. Additionally, local connections to the BMS should be operational to help identify any issues with the chiller and supporting plant in a timely manner.

#### 4.6 Build requirements prior to ramping up MRI magnet

Another key timepoint in the project is when the MRI magnet is ramped up, since it is then that all of the risks associated with the large static magnetic field become real and permanent. If the MR system is based upon a permanent magnet, then these risks may be present when the MR scanner is delivered.

Where possible, all building work and installation & commissioning of equipment within the MR Examination room should be completed prior to the MR scanner being ramped up to avoid the need to manage the additional risks of performing work in the presence of the high magnet field. Key items of work to consider include the following.

- In-room storage
- Medical Gases
- Electrical safety testing, including commissioning of any isolated power supply (IPS)/UPS-supported sockets

It is important that an [MR Controlled Access Area](#) should be in place by the time the MRI magnet is ramped up to field. It should be clear who is responsible for the [MR Controlled Access Area](#) since this will be prior to handover of the MR system and building work to the [MR Responsible Organisation](#). It is important to confirm the installation of any planned magnetic shielding to avoid the agreed magnetic field threshold extending into areas adjacent to the MR Examination room.

**Real-world example: Magnetic shielding in the design was not installed.**

Magnetic shielding in the ceiling above the MR Examination room that was included in the design to avoid the [B<sub>0</sub> Hazard Area](#) extending into consultation rooms above the MR suite was not installed during the main build phase of the project.

**Impact: >£50K additional cost to hospital, 2 month delay to project**

**Real-world example: steel shielding, specified during design phase, was not installed.**

The need for steel shielding to contain fringe field from extending into offices above the MR Examination room was identified during the design phase of the project but was not sufficiently communicated to the installation team.

**Impact: Additional costs, plus a 2–3-month delay to ramp down MRI magnet, order and install shielding, then ramp MRI magnet back up.**

It may be beneficial to aim for installation and commissioning of any [MR Conditional](#) equipment that is intended to be used within the MR Examination room, e.g. anaesthetic machines, power injectors and patient monitoring, to occur before the magnet is ramped up to reduce the impact on needing to screen and supervise installation engineers within the [MR Environment](#) once the MRI magnet is at field. Similarly, it may be helpful for installation/commissioning of other items intended to be used within the [MR Controlled Access Area](#) more generally, e.g. intercom system and nurse call system. The reader is referred to [HBN 06-01](#) for further information on more general items to consider.

Importantly, the data connection for remote monitoring of the MR system by the MR manufacturer should be confirmed prior to ramping up the magnet, as this can help to ensure timely intervention in the event of problems relating to/including a magnet quench when MR engineers or MR staff are not on site.

**Real-world example: delays in firewall configuration to enable remote monitoring**

Network firewall changes required to enable the MR manufacturer to remotely connect to the MR scanner to monitor its status were not in place when the chiller supporting the MR system developed a fault. The failure of the chilled water supply resulted in the MR scanner losing helium for 4 days before a radiographer visited and discovered the problem. This resulted in the loss of over 200 litres of helium.

**Impact: hospital had to cover costs for replacement helium**

Finally, any floor sealing and a deep clean of the MR Examination room is recommended immediately prior to magnet ramp up to avoid the need to use non-ferromagnetic equipment. Deep cleaning may be helpful to remove any ferromagnetic swarf or other particulates that may have been introduced to the room, e.g. via contractor's clothing or footwear.

If building works are still ongoing when the magnet is ramped up it is recommended to install a tack mat in the MR Examination room doorway, if not already in place, to capture dust and dirt and help minimise the introduction of further ferromagnetic particles into the MR Examination room.

## 4.7 Summary & checklist

|                                                                                                                                                                                                         |   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">RF cage</a>                                                                                                                                                                                 | ✓ |
| All specifications from the RF cage manufacturer have been met, e.g. slab depth, flatness, dryness?                                                                                                     |   |
| RF cage attenuation measurements completed and within MR manufacturer's specifications?                                                                                                                 |   |
| All planned waveguides and filter panels to support connections to third party equipment have been installed before the installation of walls and further building work within the MR Examination room? |   |
| Consideration of temporary measures to avoid/identify inadvertent damage to RF cage during remainder of building/installation works?                                                                    |   |
| Electrical continuity tester in place to immediately indicate if electrical connections to earth are inadvertently made?                                                                                |   |
| Loose metal connections are appropriately secured, e.g. cable trays?                                                                                                                                    |   |
| Consideration of repeat measurement of RF cage performance after all building and installation works completed?                                                                                         |   |
| All fixings within the MR Examination room are non-ferromagnetic?                                                                                                                                       |   |


|                                                                                                                    |   |
|--------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Quench pipe</a>                                                                                        | ✓ |
| Received confirmation from the MR manufacturer that the MRI quench pipe has been installed to their specification? |   |
| Risk assessment completed if required for accessing locations to visually inspect the quench pipe outlet?          |   |
| Documented visual inspection of the quench pipe and quench pipe outlet to support subsequent annual inspections?   |   |

|                                                                                                                                     |   |
|-------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Build requirements prior to MR scanner delivery</a>                                                                     | ✓ |
| Required power supply and connections for MR system in place?                                                                       |   |
| Chillers installed, commissioned and ready for connection to MR system?                                                             |   |
| If specified, backup chilled water system (and any associated automatic changeover) installed, commissioned and ready for use?      |   |
| If required, quench pipe installed and confirmed to meet MR manufacturer's requirements?                                            |   |
| HVAC installed and commissioned                                                                                                     |   |
| Oxygen monitor installed and commissioned, including confirmation of automatic triggering of emergency air extract by oxygen alarm? |   |
| <a href="#">MR Examination room</a> lighting should be fully installed and commissioned?                                            |   |
| Data connection for remote monitoring in place?                                                                                     |   |
| BMS connections to supporting plant operational?                                                                                    |   |

|                                                                                                |   |
|------------------------------------------------------------------------------------------------|---|
| <a href="#">Build requirements prior to ramping up MRI magnet</a>                              | ✓ |
| All storage within MR Examination room built/installed?                                        |   |
| Medical gases installed and commissioned?                                                      |   |
| Electrical safety testing completed?                                                           |   |
| <a href="#">MR Controlled Access Area</a> in place, with clear allocation of responsibilities? |   |
| Any planned magnetic shielding installed?                                                      |   |

|                                                                                                                                                                                                                   |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Installation and commissioning of any <a href="#">MR Conditional</a> equipment that is intended to be used within the MR Examination room?                                                                        |  |
| Installation/commissioning of other items intended to be used within the <a href="#">MR Controlled Access Area</a> to minimise MR safety screening/supervision of service personnel once the magnet is ramped up? |  |
| Confirmation by MR manufacturer of fully functioning remote monitoring?                                                                                                                                           |  |
| MR Examination room floor sealed?                                                                                                                                                                                 |  |
| Deep clean of the MR Examination room?                                                                                                                                                                            |  |
| Installation of tack mats at entrance to MR Examination room?                                                                                                                                                     |  |

## 5 Delivery & installation (RIBA stage 5)



### 5.1 Introduction

This section covers the delivery and installation of the MR system. Although both this and the previous build section are part of RIBA stage 5, they are separated here since in the context of new MRI installations they form two distinct pieces of work.

Use of the term [MR Installer](#) in this section recognises that for some new MRI projects the MR manufacturer may subcontract installation of the system to a separate team. Additionally, the MR system may be purchased from another supplier.

Ideally most of the building work will have completed by this stage of the project. However, there will typically be a need for some overlap to reseal the RF cage and complete the build and decoration of the MR Examination room. Consequently, it is important to consider and agree how site responsibilities will be managed between the [MR Installer](#) and other contractors.

It is important to establish schedules with all parties concerned in the early stages of the MR installation. Examples of items that might appear in the schedule of work for the delivery and installation phase are listed below in Table 4.

| Activity                                                             | typical duration [days] | Comments                                                                                                                                                |
|----------------------------------------------------------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| MR scanner and associated equipment delivery including liquid helium | 1                       | Note: local Council should be notified in advance and permission obtained for any road closures required for delivery of MR scanner if applicable       |
| Internal cabin finishing works                                       | 1-2                     | Make good post delivery. Refit RF cage scanner entry panels                                                                                             |
| Helium fill                                                          | 0.5                     | To suit manufacturer's programme                                                                                                                        |
| MR scanner installation, ramp up & commissioning period              | 4-8                     | Once the MR scanner is ramped up permits to work should be issued (MR) and MR safety screening of contractors/Trust staff accessing MR controlled areas |
| Network connections (PACS + remote monitoring)                       | 1-2                     | Integral with MRI commissioning                                                                                                                         |



|                                                            |     |                                                                                                                          |
|------------------------------------------------------------|-----|--------------------------------------------------------------------------------------------------------------------------|
| Installation of ancillary equipment e.g. contrast injector | 1-2 | Consider this prior to MRI ramp up. Also check any dedicated enabling requirements (power, data, structural mounts, etc) |
| Cleaning of MR suite                                       | 1-2 | To meet local requirements                                                                                               |

Table 4. Example activities associated with delivery and installation phase.

## 5.2 MR scanner delivery

Conventional superconducting MR scanners are not ramped up during transit and therefore the hazard of the large magnetic field is not present. Consequently, the requirements for delivering MR systems are generally similar to those associated with the delivery of other large items of equipment. Sites should follow standard practice and recommendations for such deliveries.

Typically, the [MR Installer](#) will organise and manage many of the aspects associated with the MR scanner delivery. Specific points to consider include the following.

- Structural capacity for delivery/exit route within the building
- Structural capacity of the proposed location for the crane & all approvals to erect
- Hospital approvals. Potential impact on any hospital services/other departments should have been discussed well in advance, mitigations considered and plans agreed well in advance of the proposed delivery date.
- Council/other external approvals, e.g. any public road closures required for cranes to remove/deliver the magnet should have been approved in advance by the local council. Consider also requirements for any crane jib or load over-sail of property not under the control or ownership of the main contract or its agents.
- Forming delivery/exit apertures for MRI
- Forming scaffold/platform for MRI exit/delivery

MR systems based on permanent magnets may pose additional logistical challenges for delivery in terms of increased weight compared to superconducting magnets, as well as the permanent magnetic field. Non-ferromagnetic alternatives may be required for many of the tools typically used to rig the MR scanner. The benefit is that there are no cryogenics and therefore no need for quench pipes or a continuous water cooling system. Typically, there is also only one cabinet that comes with the system that requires power.

### Real-world example: Late change in delivery route for MR scanner

Permissions for the original proposed delivery route were not obtained, and an alternative delivery route had to be arranged at short notice.

**Impact: Additional cost**

If included in the design, MR scanners should be placed on MR manufacturer approved anti-vibration pads at their final location in the MR Examination room. Super-conducting MR systems will require connection to the dedicated chilled water supply at delivery to ensure minimal helium boil off.

### 5.3 MR scanner installation

The installation of the MR scanner will typically be performed by dedicated MR installation engineers. They will generally be very experienced with the installation of MR systems and be able to manage appropriately any potential issues that might arise. Consequently, this section focuses more on a few issues that may be helpful for the [MR Responsible Organisation](#) to consider.

#### Adjacent MR scanners at same field strength

In the event that an MR scanner is installed adjacent to another scanner operating at the same nominal static magnetic field strength, it is recommended that MR engineers utilise the permitted flexibility on the field strength to which they ramp the magnet to maximise the difference in final static magnetic fields between the two systems. This helps to mitigate for problems that may result in the RF signal emitted by one MR scanner being detected by an adjacent MR scanner and negatively impacting on the image quality. However, even when such a separation is performed, there may still be overlap in RF frequencies when MR images acquired with a high receiver bandwidth and image artefacts can result if RF cage performance is insufficient.

#### Real-world example: RF interference from nearby MR scanner at same field strength

Two 3T MR scanners were installed with a shared MR control room. Although the MR scanners were ramped up with the appropriate separation of centre frequencies, intermittent external RF interference was observed on MR images with high receiver bandwidths. It was subsequently identified that the metal strip at the base of the MR Exam room door that formed the electrical connection with the door frame was missing. This had been removed after the RF cage was built and commissioned to avoid potential damage to this strip during the rest of the building work, but reattaching this had been missed.



**Impact: reduced MRI quality until RF finger contact springs reattached on MR Examination room door.**

#### Confirmation of fully functioning remote monitoring

Sites are encouraged to seek confirmation from the [MR Installer](#)/MR manufacturer that any planned remote monitoring is working as expected. This is encouraged as soon as possible after the MR scanner is connected to the local IT network to help mitigate for problems that may arise out of hours, in particular any problems with the chilled water supply or a magnet quench.

#### Real-world example: Non-functioning remote monitoring system not followed up.

Remote monitoring of MR system was discovered to be partly/non-functional many months after installation had completed.

**Impact: Increased consequences should problems have arisen with cooling for the MR system out of hours, potentially resulting in significant periods of downtime if system had quenched.**

### **MR system local IT configuration**

Configuration of the MR system with regards local network connections (PACS, RIS worklist, other DICOM nodes) and remote monitoring is typically set up by the [MR Installer](#) in conjunction with the Trust PACS/IT team. Local sites are encouraged to confirm local IT configurations are completed as requested. This should include end-to-end testing to confirm a complete patient workflow, i.e. registering a test patient on the RIS, pulling details across to the scanner, scanning a test object and archiving images to PACS. Where specified, retrieval of MRIs from PACS should be confirmed. It may be helpful to confirm any changes in DICOM metadata when retrieving items from the PACS. Additionally, confirmation of MRI transfers to each specified DICOM node is recommended.

### **MR system commissioning**

Following magnet delivery and installation the [MR Installer](#) will run a series of commissioning procedures and tests. These include shimming, tune up, quality assurance (QA) tests and coil QA. The MHRA recommend that the manufacturer or supplier provides written evidence that the equipment is compliant with the procurement specifications and their own performance specifications and suggest it may be helpful for a hospital technical representative to be present during commissioning procedures.

### **Control of access**

Prior to the magnet being ramped up it is important for the [MR Safety Expert](#) to liaise with the [MR Responsible Person](#)/lead MR radiographers to ensure designation of the [MR Controlled Access Area](#), appropriate display of MR safety notices and that any personnel working in [MR Controlled Access Area](#) e.g. contractors, Estates staff undergo MR safety screening. It is recommended that any areas within the [B<sub>0</sub> Hazard Area](#) outside of the MR suite or areas close to the quench pipe outlet are now classified as permit to work areas.

Typically, MRI installers will provide MR safety signage as per recommendations in IEC 60601-2-33. However, the [MR Responsible Organisation](#) may prefer to utilise alternative/additional signage, e.g. IPEM MR-Safety Notices ([IPEM 2017](#)).

## **5.4 Ancillary equipment installation**

Ancillary equipment is not always supplied in one process by the magnet installer, so this may arrive anytime during or sometimes post installation with other responsible parties for installation. It is important that any ancillary equipment is tested and labelled as [MR Safe](#), [MR Unsafe](#) or [MR Conditional](#) with conditions attached. Consider any services or enabling works that may be needed for such equipment within the overall project plan.


## 5.5 Summary & checklist

|                                                                                                                                                 |   |
|-------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">MR scanner delivery</a>                                                                                                             | ✓ |
| All approvals obtained for MR scanner delivery, including crane location, over-sail permissions, delivery route and any required road closures? |   |
| All enabling works for MR scanner delivery completed, including formation of access route into the building and any required scaffolding?       |   |
| MR scanner placed on anti-vibration pads in MR Examination room?                                                                                |   |
| MR scanner connected to chilled water supply?                                                                                                   |   |

|                                                                                                                             |   |
|-----------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">MR scanner installation</a>                                                                                     | ✓ |
| Separation of centre frequencies for adjacent MR scanners at same nominal field strength?                                   |   |
| Confirmation of fully operational remote monitoring from <a href="#">MR Installer</a> /MR manufacturer?                     |   |
| Confirmation of MRI IT configurations as specified, including successful end-to-end testing of a complete patient workflow? |   |
| Confirmation from <a href="#">MR Installer</a> of completed commissioning of MR system?                                     |   |
| Confirmation of working access control to <a href="#">MR Controlled Access Area</a> ?                                       |   |
| Confirmation of installed additional MR safety signage specified by <a href="#">MR Responsible Organisation</a>             |   |

|                                                                                                                                        |   |
|----------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Ancillary equipment installation</a>                                                                                       | ✓ |
| All ancillary equipment (e.g. pump injector, infusion pump, GA machine etc.) commissioned and displays appropriate MR safety labelling |   |

## 6 Acceptance (RIBA stage 6)



### 6.1 Introduction

This section covers the acceptance phase of a new MRI installation. Acceptance testing covers the process of checking that the installation and the performance of the equipment are as expected. It is performed on behalf of the [MR Responsible Organisation](#) to inform a decision to accept the work and formally take on responsibility from the MR manufacturer and/or installation provider. Additionally, acceptance testing provides baseline measurements for any subsequent checks, e.g. as part of regular quality assurance programme.

Discussions here are focused on items that are considered to have additional/specific relevance for MR suites. For more general, non-MRI specific items, please refer to [HBN 06-01](#). For acceptance of the MR system, acceptance should only commence once the MR manufacturer has completed the installation and commissioning of the MR system and believe it is ready for use. Ideally all building works should also have completed prior to acceptance testing.

Project teams are encouraged to plan for independent acceptance testing of the MR scanner by a suitably qualified MR physicist. There are many examples where despite the completion of MR manufacturer's own commissioning, items are inadvertently missed. Additionally, it is important to factor in an appropriate time into the project plan for acceptance testing.

This guidance does not include any recommendations on specific imaging acceptance checks. This is anticipated to be the subject of future work. In the meantime, the reader is referred to guidance on MRI QA, such as IPEM report 112 ([IPEM 2017a](#)).

### 6.2 Non-imaging acceptance test checks

A list of non-imaging acceptance test checks relevant to a typical MRI installation is provided below in Table 5. These should be considered in addition to items on the [Build checklist](#) and [Delivery & installation checklist](#) that have not been completed.

| Check                                                                                                    | Essential/<br>Possible         | Suggested acceptance<br>criteria |
|----------------------------------------------------------------------------------------------------------|--------------------------------|----------------------------------|
| Delivery and commissioning of all ordered RF coils?                                                      |                                | As ordered                       |
| Delivery of all peripheral equipment expected as part of the MR system, e.g. coil cart, patient padding? |                                | As ordered                       |
| Installation of all ordered software licences/packages?                                                  |                                | As ordered                       |
| Confirmation that all commissioning work has been performed and has passed                               |                                | All commissioning completed      |
| Detachable Table undocks in emergency?                                                                   | <b>Essential</b> if applicable | Undocks/redocks                  |


| Check                                                                                                                | Essential/<br>Possible   | Suggested acceptance<br>criteria                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <a href="#">MR Conditional</a> Trolley                                                                               | Essential if applicable  | Present and labelled                                                                                                                                                           |
| Patient communication system                                                                                         | Essential                | Functional                                                                                                                                                                     |
| Patient alarm                                                                                                        | Essential                | Functional                                                                                                                                                                     |
| MR Examination room door opens/closes and locks                                                                      | Essential                | Checked                                                                                                                                                                        |
| RF cat flap opens/closes easily                                                                                      | Essential if applicable  | Checked                                                                                                                                                                        |
| CCTV camera if installed as an extra                                                                                 | Possible                 | Installed and operational                                                                                                                                                      |
| Check extent of relevant fringe field values                                                                         | Essential                | <a href="#">B<sub>0</sub> Hazard Area</a> does not extend into uncontrolled areas                                                                                              |
| Acoustic Noise                                                                                                       | Possible                 | Noise levels acceptable in adjacent occupied spaces                                                                                                                            |
| RF Cage Attenuation check                                                                                            | Possible                 | RF Cage installers to demonstrate performance after full installation or independent check of RF cage performance. Copy of RF cage certificate supplied to local Physics team. |
| For MR systems with quench pipe: risk assessment for accessing locations to visually inspect the quench pipe outlet. | Essential                | Checked                                                                                                                                                                        |
| Manufacturer phantoms                                                                                                | Essential                | Checked as present                                                                                                                                                             |
| Spill kit for phantoms<br>Relevant COSHH forms completed                                                             | Essential                | Checked as present                                                                                                                                                             |
| Power to auxiliary equipment available                                                                               | Essential                | Checked as functional                                                                                                                                                          |
| Music/video/lights                                                                                                   | Possible                 | Checked as present and functional                                                                                                                                              |
| Warning signs for entrances to <a href="#">MR Environment</a> and MR CAA                                             | Essential                |                                                                                                                                                                                |
| Display plots of relevant fringe fields associated with static magnetic field                                        | Essential                |                                                                                                                                                                                |
| MR safety labelling of devices/ancillary equipment                                                                   | Essential                | Checked as present with correct conditions on label                                                                                                                            |
| Floor markings of magnet field isocontours for <a href="#">MR Conditional</a> ancillary equipment                    | Possible                 |                                                                                                                                                                                |
| Systems of work for roof/basement                                                                                    | Essential where required | Written/signed off                                                                                                                                                             |
| Medical gases/scavenging – all outlets checked and signed off by appropriate person?                                 | Essential if applicable  | Checked as present and functional                                                                                                                                              |
| Policy for out-of-hours emergency access lodged with Security/Fire Department                                        | Essential                | Policy written and signed off                                                                                                                                                  |
| <a href="#">MR Safe/MR Conditional</a> ladders in MR Technical room                                                  | Essential                | Checked as present                                                                                                                                                             |

| Check                                                                                                                                                                                                                                                                                                                                                        | Essential/<br>Possible                         | Suggested acceptance<br>criteria                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|-----------------------------------------------------------------|
| Display panels in MR Control room wall for oxygen level/chilled water flow/chilled water temperature and any system faults                                                                                                                                                                                                                                   | <b>Essential</b>                               | Checked as present                                              |
| Appropriate labelling next to all display panels/alarms. This may include the following descriptions. <ul style="list-style-type: none"> <li>• What is it.</li> <li>• What is expected if working as intended, e.g. no alarm, normal range of values.</li> <li>• Who and to contact if alarming/outside expected values, and how to contact them.</li> </ul> | <b>Essential</b>                               | Checked as present                                              |
| MR Examination room temperature and humidity monitor.                                                                                                                                                                                                                                                                                                        | <b>Essential</b>                               | Checked as present                                              |
| Emergency magnet off buttons, labelled with expected time (provided by MR manufacturer) for the static magnetic field to drop to safe levels                                                                                                                                                                                                                 | <b>Essential</b> for superconducting MR system | Present and confirmed functional by manufacturer                |
| Emergency power off buttons                                                                                                                                                                                                                                                                                                                                  | <b>Essential</b>                               | Checked as present                                              |
| Patient Lockers                                                                                                                                                                                                                                                                                                                                              | <b>Essential</b>                               | Checked as present and functional                               |
| Liaison/visits with other teams who may need to access <a href="#">MR Controlled Access Area</a> to explain safety <ul style="list-style-type: none"> <li>- Resuscitation</li> <li>- Security</li> <li>- Domestic Services</li> <li>- Fire Brigade</li> </ul>                                                                                                | <b>Essential</b> as required                   | Done                                                            |
| <a href="#">MR Conditional</a> Fire Extinguisher                                                                                                                                                                                                                                                                                                             | <b>Essential</b>                               | Present, checked as <a href="#">MR Conditional</a> and labelled |

Table 5. List of non-imaging acceptance test checks relevant to a typical MRI installation.

Once the magnet has been installed, commissioned and acceptance tested, all building works including final touches have been completed, and reports/evidence has been submitted to the project team and Trust then the scanner and building can be handed over to the Trust.

## 7 Use (RIBA stage 7)



### 7.1 Introduction

This section covers the use of the new MRI installation, from when it is formally accepted and lasting for the lifetime of the system. Those involved in Facilities and Assets Management support the users of the MR suite and there should be close working relationships with the [MR Responsible Person](#) and the [MR Safety Expert](#) throughout the lifetime of the building.

### 7.2 Policies and procedures

The [MR Responsible Organisation](#) should have appropriate policies and procedures in place to support safe working practices within the MR suite and ensure high-quality services. Various guidance and resources are available to support on this, including the following.

- MHRA guidelines for MRI safety ([MHRA 2026](#))
- SCoR-BAMRR guidelines for safety in MRI ([SCoR-BAMRR 2019](#))
- A list of all SCoR guidance covering MRI ([SoR](#))
- Quality Standard for Imaging ([CoR-RCR 2024](#))
- BIR template risk assessment for MRI ([BIR](#))
- AXREM General Equipment (Non X-Ray) Handover Form ([AXREM 2026](#))

The MHRA also provide guidelines on the management of medical devices more generally ([MHRA 2021](#)).

Regular audits of current practice against local policies and procedures, and additionally of local policies and procedures against national guidance, are encouraged to help ensure up to date high quality and safe working practices.

### 7.3 Preventative maintenance.

Regular preventative maintenance and servicing of the MR scanner and supporting plant is key to addressing issues in a timely manner, ideally before they impact on the MRI service. There are various examples, particularly with chillers and other supporting plant, where a lack of appropriate preventative maintenance has resulted in failures that have led to significant downtime of the MR scanner.

A plan for how service engineers will access certain areas when on site, e.g. [MR Controlled Access Area](#), MR Tech room, chillers, AHU, to allow them to carry out their work should be implemented. Co-ordination of preventative maintenance visits may be helpful to minimize impact on the MRI service, e.g. arranging for chiller service visits (that may require periods of chiller downtime) to coincide with MR system service visits.

#### 7.3.1 Chillers

For chillers with built in redundancy, it is important that any initially non-critical chiller issues are addressed promptly to avoid the possibility of total chiller failure.



**Real-world example: Loss of chiller redundancy due to delay in repair of initial fault.**

A dual redundant chiller solution was provided for a clinical MR scanner. However, the system suffered failure of both cooling chains due to delay in repair of the first fault. Factors contributing to the delay in repair included confusion over maintenance contractual arrangements, lack of indication of failure of a single chain and delay in parts availability.

**Impact: MRI downtime of 9 days**

As part of business continuity planning, sites may wish to consider options to hire a temporary chiller to support the MR system, particularly if there is no back up chiller option.

**Real-world example: Mobile chiller hire**

Following breakdown of the chiller support for the MR system, a temporary chiller was hired. This was delivered and installed within a few hours, allowing the MR system to be used.

**Impact: MRI downtime limited to a few hours**

### 7.3.2 MR Examination room doors

A preventative maintenance programme associated with the MR Examination room door is recommended to help avoid various issues that include the following.

- Repairing of broken RF finger contact springs to maintain RF cage integrity ([Small et al. 2026](#))
- Door latches and locks are in full working order, reducing the risk of patients and staff becoming trapped within the room ([Steckner et al. 2026](#))
- Doors becoming overly difficult to open and close, which may present a manual handling risk ([Steckner et al. 2026](#)). Additionally, this may result in practices where the MR Examination room door is not appropriately closed during MRI scanning which may result in external RF interference impacting image quality.

Periodically cleaning the RF finger contact springs and magnet door frame with alcohol-based wipes can help reduce residue build up that may impact on electrical contact and RF cage performance. One of the RF cage manufacturers recommending cleaning the door frame around every 2 months for maximum performance.

**Real-world example: RF cage door hard to open/close.**

Broken door handles due to MR Examination room MR Examination room door slamming. Poor MR image quality due to MR Examination room door not completely closed during scans

**Impact: additional costs and poor image quality**

### 7.3.3 Non-ferromagnetic fire extinguishers

If the servicing of non-magnetic fire extinguishers within the MR suite is incorporated into a site-wide servicing programme, care should be taken to ensure that there is a clear recognition of any non-ferromagnetic extinguishers and the need to maintain them as non-ferromagnetic.

**Real-world example: Fire extinguishers within MR suite were not sufficiently identified as non-ferromagnetic as part of hospital-wide servicing programme.**

As part of a regular MR safety audit it was discovered that non-ferromagnetic fire extinguishers within the MR suite had been inadvertently swapped out for standard ferromagnetic fire extinguishers as part of a site-wide servicing programme for fire extinguishers within the hospital.

**Impact: the introduced conventional ferromagnetic fire extinguishers presented a significant projectile risk if taken into the [MR Environment](#).**

### 7.3.4 Electrical supply generator testing

For MR systems on generator supported secondary power supplies it is highly recommended to plan for planned generator testing. A sudden loss of power to the MR system can result in errors that can subsequently lead to significant down time. In 2022, there were 3 cases of generator testing impacting on MRI reported to NRLS.

### 7.3.5 Quench pipe inspections

The MHRA guidelines for MRI safety recommend annual inspections of all vent piping. This should include, at least, a visual inspection of the external piping. Additionally, the quench pipe outlet should be visually checked after periods of extreme weather. Responsibility for checks on the quench pipe sits with the [MR Responsible Organisation](#).

Specific recommendation on steps to perform following installation are provided in the Installation section to establish a baseline. The following steps are recommended to be taken on an annual basis, which may form part of a more general MR safety audit.

- Review and update as required any risk assessment for accessing locations to visually inspect the quench pipe outlet.
- Perform a visual inspection of the quench pipe outlet, taking photographic evidence of the following to check/confirm no changes since previous check.
  - Access to quench pipe outlet is appropriately controlled
  - No obstructions to the quench pipe outlet
  - No changes to any rain covers/protective mesh
  - No changes to signage
  - No changes to area below the quench pipe outlet that might increase the risk of exposure to cryogenic gases in the event of an MRI quench.
- Perform a visual inspection of as much of the quench pipe as is practical to do so, taking photographic evidence of the following to confirm no change since installation
  - Insulation
  - Hazard warning tape

### 7.3.6 Emergency ramp down unit

The magnet emergency ramp down unit (emergency quench button) will usually contain a backup battery. Some MR manufacturers provide the [MR Responsible Organisation](#) with the ability to periodically check this backup battery.

### 7.3.7 Drip trays

Ideally any drip trays that are installed, e.g. in tech room, will be installed with a direct connection to drain. If this is not the case, then periodic checks of drip trays should be considered to avoid overspilling.

### 7.3.8 Oxygen monitors

Conventional oxygen monitors are based on an electrochemical sensor that typically starts to fail after about 2 years, at which point a low oxygen state will be triggered. Regular replacement of the oxygen sensor as part of a preventative maintenance is therefore key to avoiding false alarms. Servicing of oxygen monitors should be performed by qualified individuals.

**Real-world example: Automatic trigger of emergency extract inadvertently disabled when oxygen monitor serviced by a non-trained individual.**

The chemical sensor for an oxygen monitor was replaced by a member of staff, who inadvertently disabled the automatic trigger of the emergency extract fan when the oxygen alarm was triggered.

**Impact: MR suite was operating for an extended period of time with no automatic trigger of emergency extract when low oxygen alarm triggered, impacting the health and safety of staff and patients. Subsequently, servicing of the oxygen monitor was contracted out to specialist company.**

Confirmation of a working automatic trigger of the emergency air extract for the MR Examination room is recommended as part of preventative maintenance checks.

It may be helpful to procure a portable oxygen sensor for an MR suite to utilise in the event of a suspected false oxygen alarm.

### 7.3.9 Cleaning and decontamination

Cleaning, disinfection and decontamination will be required frequently in operational use. The surface finishes, structural plastics and elastomeric seals in MR equipment may have limited compatibility with cleaning and disinfection products. Use of incompatible materials can result in damage or failure of the equipment.

Prior to use, the operating manual should be reviewed for recommendations. This should be checked against any site-wide cleaning and decontamination policy as general purpose materials may not be suitable for MR equipment. Where needed an MR-equipment specific policy and materials may need to be agreed with infection control.

**Real-world example: Multiple coil failures due to use of incompatible surface disinfectant wipes**

Coils were periodically disinfected using a hospital wide policy which recommended the use of a specified brand of pre-impregnated disinfectant wipes. These wipes contained quaternary ammonium compounds ("Quats"), but these substances were incompatible with the polycarbonate-acrylonitrile-butadiene styrene (PC-ABS) plastic used for the coil casings. The casings suffered accelerated deterioration leading to cracking, structural failure or ingress of fluids and electronic failure.

**Impact: Approximately £100,000 to repair/replace the damaged coils.**

## 7.4 Changes within the MR suite

The [MR Responsible Person](#) should be included in the procurement of any new equipment for the MR suite. Some items of [MR Conditional](#) ancillary equipment may require modification of the MRI MR Examination room floor to demarcate areas of high magnetic field where the device may not enter. Tethers may also be required to limit movement in the MR Examination room. Some [MR Conditional](#) equipment requires testing in the MR Examination room while the scanner is imaging to rule out mutual interference. Advice should be sought from the [MR Safety Expert](#).

If a change of usage of the MR suite is proposed, e.g. anaesthetics, paediatrics, compartmentalisation of MR suite to limit aerosol producing procedures (COVID-19), MR-guided biopsy, radiotherapy, MR-autopsy, then a detailed plan should be formulated with all the relevant parties consulted.

Particularly when changes within the MR suite are proposed as part of a hospital-wide initiative, care should be taken to consider whether these changes may unintentionally result in a negative impact, e.g. on MR safety or image quality.

### **Real-world example: Replacement of halogen bulbs with conventional LED bulbs in MR exam room**

A significant reduction in image quality for certain MRI exams on a particular MR scanner was identified by radiology staff. After no cause was found in initial troubleshooting by the MR manufacturer, bookings for the affected MR exams were diverted onto other MR systems. Eventually MR physicists identified the cause was related to LED bulbs in the MR Examination room that had been fitted in place of the original halogen bulbs as part of a hospital-wide energy-saving initiative. These conventional LED bulbs were not designed for use in an MR exam room. The problem was resolved once the halogen bulbs were reinstated.

**Impact: Reduced diagnostic performance for affected patients. Restrictions on MR scanner usage lasting several months**

## 7.5 Outside of the MR suite

Sites should establish/update a plan of the site that highlights the location of relevant MR-related hazards for the purpose of local estates management to support future planned works that may impact on MRI and to maintain an awareness of MR-related hazards outside of the MR suite.

Example of items to include in this plan include the following.

- Location of MR scanners. The introduction of large metal objects (e.g. cranes, scaffolding, new lifts, air ambulance) close to MR scanners can have negative impact on MR image quality. Additionally, various other equipment (e.g. gamma camera, fluoroscopy systems, cyclotrons, linear accelerators, CT scanners, other MR systems and magnetically guided surgical equipment) are particularly sensitive to magnetic fields and consideration of distances to existing MR scanners should be considered when planning to install such equipment to avoid them being negatively impacted.
- Access route to MR scanners. It is important to maintain an access route to the MR scanner for servicing, that can accommodate the replacement/delivery of large items such as a gradient coil and helium dewars. For conventional superconducting MR systems, in the event of a magnet quench it is important that a helium refill occurs as soon as possible to avoid the magnet warming up to the point where a thermal cycle is required. This is particularly important for 3T and higher field systems. One MR manufacturer reports a 24-

hour window of opportunity to deliver helium to stabilise a 3T system and avoid a thermal cycle. Additionally, it is important to maintain an access route for future removal/replacement of the MR scanner, including the locations where a crane or scaffolding may be required.

- Location of MR-related hazards external to the building, e.g. quench pipe outlets or where the [B<sub>0</sub> Hazard Area](#) extends outside of the building, even if these locations are generally inaccessible. Such information may be helpful to establish areas requiring a permit to work and relevant information to provide fire rescue teams. Any proposed building changes in the vicinity of the quench pipe outlet should be discussed with the [MR Responsible Person](#). Air intakes, doors and windows are a particular concern. Workers in these areas should be aware of cryogen hazard and know how to respond in the event of a quench. Following any quench, a thorough inspection of the cryogen vent system should be conducted prior to returning the MR scanner back to service. Any modifications of quench pipe system may be subject to the Pressure Systems Safety Regulations 2000. Close consultation with the [MR Safety Expert](#) and the [MR Responsible Person](#) is strongly recommended when any changes are proposed within or in the vicinity of the MR suite or quench pipe.

It is recommended that such a plan is periodically checked to ensure it is still valid and that items such as signage are in place and visible.

**Real-world example: Access route to MR scanner for servicing not maintained**

When a gradient coil on an MR scanner needed replacing, it was found that building work outside the MR suite that had occurred after the MR system was installed had restricted physical access, leaving insufficient space to remove and replace the coil.

**Impact: Additional building work required to restore access for replacement of gradient coil**

Any building changes in the vicinity of the quench pipe outlet should first be discussed with the [MR Responsible Person](#). Air intakes, doors and windows are a particular concern. Workers in this region should be aware of cryogen hazard and know how to respond in the event of a quench. Following any quench, a thorough inspection of the cryogen vent system should be conducted prior to returning the MR scanner back to service. Any modifications of quench pipe system may be subject to the Pressure Systems Safety Regulations 2000. Close consultation with the [MR Safety Expert](#) and the [MR Responsible Person](#) is strongly recommended when any changes are proposed within or in the vicinity of the MR suite or quench pipe.

## 7.6 Adverse incident reporting

A structured incident reporting system is important to enhance MRI patient safety by strengthening the overall safety culture and providing staff with a reliable mechanism to document adverse incidents, near misses, and unsafe conditions. Reliable incident reporting depends on a strong organisational reporting and learning culture. It also requires standardised methods for reviewing and coding incidents, timely feedback to staff on outcomes and lessons learned and follow-up, to ensure that corrective actions are fully implemented. Learning from analysis can be shared to promote system-wide learning with a focus on processes rather than individual blame. This in turn can help to drive continuous improvement through updates to policies and procedures, training, and system design. By consistently reviewing and learning from incidents, MRI services can create a safer environment for both patients and staff.

In the UK, services are encouraged to adopt the UKHSA national coding taxonomy for MRI-related incidents and near misses ([UKHSA 2024](#)). Using a single, standardised coding framework allows services to identify system-level issues, reduce variability, and enhance safety strategies across MRI practice. Further information on submitting data to the national incident learning system can be found on the Medical Exposures Group [webpage](#). Submitting coded MRI incident data to UKHSA will contribute to the following.

- A national overview of MRI safety events
- Enable services to benchmark their own trends
- Development of effective, evidence-based improvements across the sector

This is a voluntary incident learning system and does not negate the legal requirement to report to the relevant regulatory authorities.

Additionally, in the UK the reporting of adverse incidents that relate to medical devices and medicines to the MHRA via the [Yellow Card scheme](#) is strongly encouraged.

## 7.7 Replacement/decommissioning

A route for eventual replacement of the MR system should be maintained as part of the building maintenance strategy, typically authored by the architects, and the site development control plan. This should include all aspects of the replacement, e.g. crane placement.

### **Real-world example: replacement route for MR scanner not maintained.**

The original route for transferring the magnet into the building was not protected. When it came to subsequently replace the MR scanner, a new route had to be established requiring removal and subsequent replacement of section of the hospital façade.

**Impact: about £70K of additional costs**

The MR manufacturer may be able to provide information about the current performance of an MR system relevant to considerations about replacement/upgrade. This may include metrics on how performance has changed during the lifetime of the system, as well as comparisons with similar systems and with new generations of MR scanner.

The MHRA's guidance on the management of medical devices ([MHRA 2021](#)) provides advice regarding planning for device replacement and eventual decommissioning and disposal. These include suggestions for replacement criteria, appropriate secure deletion of any patient identifiable data and guidance on potential sale of medical device or donation for reuse. Global Health Partnerships, a UK charity and international development organisation, also provide UK-specific guidance on medical equipment donations ([Mullally 2013](#)).

## 7.8 Summary & checklist

|                                         |   |
|-----------------------------------------|---|
| <a href="#">Policies and procedures</a> | ✓ |
| Local policies and procedures in place? |   |
| Regular audits?                         |   |

|                                                                                                                                                              |   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Preventative maintenance</a>                                                                                                                     | ✓ |
| Agreed plan for how service engineers will access certain areas (e.g. <a href="#">MR Controlled Access Area</a> , MR Tech room, chillers, AHU) when on site? |   |
| Preventative maintenance in place for the chillers?                                                                                                          |   |
| Consideration of options to hire a temporary chiller to support the MR system, particularly if there is no back up chiller option?                           |   |
| Preventative maintenance in place for the MR Examination room door?                                                                                          |   |
| Non-ferromagnetic fire extinguishers are appropriately recognised in any site-wide servicing programme?                                                      |   |
| Plan to manage planned generator testing?                                                                                                                    |   |
| Annual inspection of all MRI quench pipes?                                                                                                                   |   |
| Periodic check of magnet quench backup battery (if applicable)?                                                                                              |   |
| Periodic check of any drip trays not connected to drain?                                                                                                     |   |
| Preventative maintenance in place for oxygen monitors?                                                                                                       |   |
| Cleaning and decontamination products compatible with MR manufacturer's instructions?                                                                        |   |

|                                                                                                                                    |   |
|------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Changes within the MR suite</a>                                                                                        | ✓ |
| Recognition of need to include the <a href="#">MR Responsible Person</a> in the procurement of any new equipment for the MR suite? |   |
| Consultation with relevant parties for any proposed change in MR suite usage?                                                      |   |

|                                                                                                                                                                                                                                                                                                                 |   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| <a href="#">Changes outside of the MR suite</a>                                                                                                                                                                                                                                                                 | ✓ |
| Established/updated plan of site highlighting the location of MR-related hazards shared with local estates management teams to support maintaining access route for MR scanner servicing and future replacement and other building projects that may impact on the MR scanner or be impacted by the MR scanner? |   |

|                                                                                                   |   |
|---------------------------------------------------------------------------------------------------|---|
| <a href="#">Adverse incident reporting</a>                                                        | ✓ |
| Consideration of use of UKHSA national coding taxonomy for MRI-related incidents and near misses? |   |

|                                                                          |   |
|--------------------------------------------------------------------------|---|
| <a href="#">Replacement/decommissioning</a>                              | ✓ |
| Appropriate secure deletion of patient identifiable data?                |   |
| Consideration of potential sale of medical device or donation for reuse? |   |

## 8 Examples

This section provides “fly on the wall” accounts of two MRI installation projects, highlighting what went well in hindsight, what didn’t, learning outcomes and the timeline of events.

### 8.1 Example 1 – Replacement MRI

This example was an installation of a replacement MR scanner

#### What went well?

- There was good communication throughout the installation between the project management and the hospital team.
- The project team included a wide range of staff groups including external project manager, Radiology, Estates, MRI Lead Radiographers, Clinical Engineering, MR physics, PACS team, MR manufacturer, building contractors and the façade company.
- The project manager was very experienced and organised, meeting minutes were sent out promptly, and there was a good level of engagement with all relevant parties involved.
- Ceiling pressure relief panel installations did away with the need and considerable cost of an MR Examination room door hatch.

#### What did not go so well?

- Since the original MR scanner had been installed there had been a lot of building alterations (internal and external) so the original removal/delivery route through the hospital was out of the question.
- A relatively new façade had been fitted to the front of the hospital which needed to be removed to allow removal of previous/installation of replacement MR scanner at considerable increased cost to the project (approx. £70k).
- The door to the MR Examination room needed to open inwards (not recommended in MHRA guidelines) as the vaulted ceiling soffit outside the MR Examination room that was fitted post original MRI installation now obstructed an MR Examination room door opening outwards.

#### Learning Outcomes

- It’s important to maintain the access route and consider local site development plans throughout the lifetime of the MR system (see 2.5.2) to avoid additional costs and maintain compliance with national guidelines.

#### Timeline of events

##### Month 1

There was a slight delay in getting the Turnkey orders on the procurement system, but the manufacturer had now received the order and the project management team (external to Trust) were putting a programme together for the replacement of an existing MR scanner.

##### Month 2

A provisional programme, including a Gantt chart and proposed plan of the MR Suite, had been issued subject to confirmation of dates for the (expensive) removal and reinstatement of a Façade on the front of the hospital. This was required to remove the existing MR scanner from the second floor and deliver the new MR scanner once building works had progressed. MR physics queried the change to an inward opening door to the MR Examination room on the proposed plan. However, the



direction of the MR Examination room door swing couldn't be revised as previously requested and shown on the manufacturer's drawing, as the vaulted ceiling soffit outside the MR Examination room would obstruct the door opening. Options for pressure relief and escape provision were to be explored.

### **Pre-commencement Meeting Part 1**

The first of several virtual meetings had been scheduled. Attendees included Project Manager, Head of Radiology, Trust Project Manager for Estates, MRI Lead Radiographers, representatives from Clinical Engineering, MR physics, MR manufacturer, building contractors and the façade company.

On the Agenda:

- Cladding Enabling Works and Programme
- Order/Lease – provisional sums for medical gases, fire alarm works, nurse call, chiller replacement, ceiling lighting panels/mood lighting, ventilation works and new injector.
- Contract Dates and Contract Documentation – building works contracts & cash flow forecast to be issued
- Vacant possession of site and scanner removal survey – dates for erection of scaffolding and clearing of site
- Programme/Progress
- Detailed design – surveys undertaken, direction of MR Examination room door swing (inward) discussed
- Approval of Layouts – dates for final system layout drawings
- Insurances – manufacturer and contractors insurance details to be issued
- Planning and Building Regulations
- Fire Office Comments – confirmation of no compartment walls in MR Suite
- MR physics – RF cage test and proposed commissioning dates
- Infection Control Measures - details of infection control lead to be shared
- CDM regulations – F10 required and to be issued by building contractor. Contractor rules, permits, isolation induction requirements and other site considerations to be issued. Fire heat detectors (not smoke) to be fitted for duration for works. Construction Phase (H&S) Plan to be issued prior to commencement
- Site Rules and Restrictions – to be issued
- Access to Site, Storage, Security, Site Compound and Access to Live Hospital Areas - not discussed
- Emergency Contact Numbers - to be included in Project Directory and contractor information pack.
- Cessation of Work – key staff identified and procedures discussed
- Distribution of Documentation – staff circulation list identified
- Any Other Business
- Date of Next Meeting

### **Month 3**

#### **Pre-commencement Meeting Part 2**

The second virtual meeting had been scheduled. Attendees included Project Manager, Head of Radiology, Trust Project Manager for Estates, MRI Lead Radiographers, representatives from Clinical Engineering, MR physics, MR manufacturer, building contractors and the façade company.

On the Agenda:

- Site/survey - visit being arranged, liaising with Trust Estates
- Cladding removal – manufacturer to arrange ramping down mid-November. Building contractors to arrange delivery of scissor lift. Storage of cladding material to be discussed
- Layout drawings – extent of [B<sub>0</sub> Hazard Area](#) noted and accepted. No requirement for additional steel shielding.
- Electrical drawings to be issued, mains supply to MR suite and scanner and cabling discussed
- Mechanical design – survey on dates confirmed. Chiller position, routes and requirements for chiller swap discussed. Replacement of the existing ventilation/air conditioning serving the MR suite but power supply to be reused. Drawings to be issued.
- RF cage – checking with supplier re pressure relief options
- Trust Estates to issue standard contractor's pack
- Head of Radiology has issued project reference number for use on all communications
- RF cage delivery date confirmed. Check size of delivery vehicle in advance.
- Internal wall being removed as part of the Technical Room – although identified as non-load bearing it also appears to be reinforced concrete, so it is necessary to assess how quickly this can be removed and the amount of disruption. Neighbouring team to be made aware of likelihood of disruption.

### **Late Month 3**

- Electrical design drawings and architectural designs have been issued for comment and approval. Clarity requested for:
  1. Suspended ceiling type and tile
  2. Door type and finish plus ironmongery
  3. Laminate finishes for fitted furniture and worktops etc.
  4. Floor finishes – type and colour reference
  5. Paint finishes – type and colour reference
- MR physics to review the field plots and confirm if they look acceptable and give thoughts to any additional MR Safety Notices required.
- Exception report required for injector as whole life costs are more expensive than originally budgeted for.

### **Month 4**

#### **Progress Meeting 1**

The first progress meeting is held. Attendees include Project Manager, Head of Radiology, Trust Project Manager for Estates, MRI Lead Radiographers, representatives from Clinical Engineering, MR physics, MR manufacturer, building contractors and the façade company

On the Agenda:

- Matters Arising from Previous Minutes
  - Scaffolding and site accommodation is in place.
  - MRI platform design for magnet removal being double checked by scaffolder and verified by structural engineer.
  - Deadline for energising of a fully terminated and tested electrical supply being provided by the Trust identified.
  - Contract sums issued.
  - RF cage design will be updated following survey
  - Cash flow forecast issued

- No issues reported with site establishment
- Manufacturer & contractor latest insurance details issued
- Electrical designs issued, comments received relating to emergency lighting to be addressed.
- RF cage test dates to be advised
- Medical Physics acceptance testing dates to be shown on project programme
- Copy of F10 (HSE project approval) form to be displayed on site
- Personnel inductions to be done by Trust Estates before undertaking site specific inductions
- New H&S file to be issued at project completion
- Trust's contractor rules document issued
- Asbestos information has been issued. Extent of survey to be reviewed against finalised mechanical services specification
- Internal walls have been evaluated, and non-percussive methods are to be utilised for concrete cutting.
- Further site survey of mechanical services has taken place
- Mechanical design – to be issued for comment and further revised when chilled water scope is agreed.
- Contractor's Report – issued and attached to minutes of meeting
- Contractor's Queries and/or Requests for Information- Finishes samples to be delivered to site this week for selection
- CDM Regulations - safety audits and copies of all reports requested
- Any Other Business - site visits confirmed, social distancing to be observed.

#### **Mid month 4**

- Site survey completed and RF cage drawings updated
- Air flow test report issued
- Pressure relief panels to be installed in the MR Examination room ceiling. Design to meet MHRA Guidelines for MR equipment manufacturers protections which are: -
  - the cryogen ventilation path (quench vent),
  - an active emergency extract fan,
  - a passive overpressure relief (exclusive of the MR Examination room door), built into MR installation requirements.

#### **Month 5**

##### **Progress Meeting 2**

The second progress meeting was held. Attendees included Project Manager, Head of Radiology, Trust Project Manager for Estates, MRI Lead Radiographers, representatives from Clinical Engineering, MR physics, MR manufacturer, building contractors and the façade company

On the Agenda:

- Matters Arising from Previous Minutes
  - Dates for cladding reinstatement to be confirmed
  - Scaffolding has been removed
  - Scanner delivery date confirmed. Survey to be arranged and RAMS to be issued.
  - Electrical report was issued, review concluded new mains cable and earth are necessary – to be arranged by the Trust

- Revised scope of chilled water works to include removal and offloading of existing chiller and installation of new chiller to serve the MR scanner being delivered in this phase has been instructed.
- Detail regarding the scope of ventilation works was issued earlier this year and subsequently reissued. Further detail for HTM derogation to be provided.
- Response provided to Estate's comments regarding emergency lighting in the MR Examination room. There is no [MR Safe](#) DALI emergency lighting system which could be installed within the room. Agreed to check the Trust specification document to ensure compliance the system will be BS and Building Regulations compliant; to be reflected on the derogation schedule as necessary. Manual test will be provided in lieu of DALI self-checking system
- RF cage test dates to be advised with a few days' notice, expected next week.
- Finishes samples selected on site and reflected on the latest architectural drawings included the 20mT flooring demarcation instructed.
- Copies of site safety audit reports requested.
- Contractor's Report
  - Works currently on schedule for system delivery
  - Request for a Building Control application was clarified as being in respect of the cladding reinstatement, which was noted as being like-for-like with the existing. Application to be made
  - Penetrations to be properly stopped, including those through the floor slab. To be photographed and recorded.
  - Detail on who is providing fire stopping and fire dampers
  - Finishes sub-contractors to be appointed.
- Contractor's Queries and/or Requests for Information
  - Fire compartmentation and damper positions becoming crucial
- MR manufacturer
  - Scanner delivery RAMS to be issued
  - MR scanner is within the UK.
  - No BMS links being provided. Trust requirements to be checked.
  - Fire dampers will need to be connected to fire alarms
  - Access for drainage connections to adjacent rooms to be arranged with the department.
- Any Other Business
  - Complaint regarding exhaust position of welfare generator has been addressed by shielding/cowl.
- Access to fire/smoke dampers will be afforded from outside the MR Examination room.

### **Progress Meeting 3**

The third progress meeting was held. Attendees included Project Manager, Head of Radiology, Trust Project Manager for Estates, MRI Lead Radiographers, representatives from Clinical Engineering, MR physics, MR manufacturer, building contractors and the façade company

On the Agenda:

- Matters Arising from Previous Minutes
- Dates for cladding reinstatement confirmed
- Scanner delivery date confirmed. Survey date to be confirmed
- Scanner mains electrical cable installation (under Trust instruction) is pulled, awaiting connection and testing which is required most urgently to prevent delay.

- MR Examination room door (post Brexit) is being held in customs, to be released late this month
- Revised scope of chilled water works is underway. RAMS to be issued for chiller delivery
- HTM derogation reports have been issued and circulated. Will chase sign-off.
- Electrical design review highlighted a request to replace the local power DB within the Control Room, this is included in the budget costs discussed
- Proposed injector installation date discussed
- Proposals in respect of emergency lighting within the Examination Room were further discussed since the last meeting and formalised within the derogations report.
- RF cage test delayed due to MR Examination room door not being on-site
- MR physics acceptance dates - early March
- Site dilapidation inspection was undertaken on the date of the previous meeting. No significant issues were recorded although a minor repositioning of the chilled water pipework was assessed.
- Mechanical design drawings have been issued for comment and include previously instructed works. Updated drawings to be issued shortly to include additional fire damper works. No comments received in response to the designs, any further changes requested now will result in delays.
  - Survey of pipework in Control Room was undertaken and the pipes were confirmed as redundant, one has been removed as the other is close to the wall and does not obstruct circulation. Fire-stopping to complete.
  - Copies of site safety audit reports requested.
  - Interpretation of existing fire compartmentation was issued for comment. Fire officer responded to request compartmentation of the MR suite, with acknowledgement the MR Examination room door and window are not fire rated installations. Feedback is awaited from Trust Fire Officer regarding the suitability of the existing Control Room doors, which appear to be fire doors.
  - Although scanner delivery date is due to be maintained, it was highlighted there will likely be fire stopping and ventilation works ongoing afterwards which may impact on clinical service
  - Fire-stopping will include floor penetrations.
  - All finishing trades now appointed.
  - Need to clarify any BMS expectations.
  - Check with mechanical installers any need to access adjacent areas to complete plumbing connections and coordinate with local staff accordingly.
- Contractor's Report
  - Works currently on schedule for system delivery
  - RF cage installation has progressed well, except for the door delay
  - Out of hours works for chiller pipework are underway
  - Internal doors on site
  - Vinyl flooring works being rescheduled to better coordinate completion of RF cage and ceiling, to allow for ductwork changes associated with fire dampers.
  - Delay due to fire protection works to be established.
  - Contractor's Queries and/or Requests for Information
  - As above
- Manufacturer
  - Trust confirmed no additional purchase orders have been raised against this project at present. To be monitored.
- Employer's Matters
  - Scanner delivery date confirmed

- CDM Regulations
  - No incidents to report
  - A number of complaints and warnings have been made regarding contractors parking around the site. Trust security will be issuing parking tickets
- Any Other Business
  - Next building works valuation being processed in the coming week

## **RF Cage Installation**

The RF cage was installed, and the RF test results issued. Outside (RF cage) reference levels were taken, and the RF cage was tested at frequencies of 15, 63 and 128 MHz at the MR Examination room door, MR Control room window and penetration panel.

## **Month 6**

### **Progress Meeting 4**

Attendees included Project Manager, Head of Radiology, Trust Project Manager for Estates, MRI Lead Radiographers, representatives from Clinical Engineering, MR physics, MR manufacturer, building contractors and the façade company.

On the Agenda:

- Matters Arising from Previous Minutes
- Dates for cladding reinstatement confirmed. Scaffold will not be present. RAMS to be checked and reissued
- Scanner delivery date confirmed. Manufacturer visiting site today to re-issue updated delivery RAMS
- Scanner mains electrical cable installation (under Trust instruction) has been connected and tested. Manufacturer needs test certificate for delivery.
- Medical gases works on track, pharmacist input being arranged
- MR Examination room door is fitted, test certificate to follow. Cage modifications being made to facilitate damper works, retest date to be confirmed
- Need building contractors feedback on Control Room door fire rating
- Chiller delivered, pipework and commissioning ongoing
- Injector installation date confirmed
- HTM derogation reports have been issued, signed off and deemed closed
- MR physics access confirmed and manufacturer programme has been circulated
- New H&S file to be issued at project completion
- Mechanical design drawings have been issued for comment and include all instructed works. No further Trust or Fire Officer comments received in response to the designs
- Survey of pipework in Control Room was undertaken, and the pipes were confirmed as redundant. Fire stopping to penetrations, walls and works to fire dampers/ductwork underway
- Copies of site safety audit reports issued
- Contractor's Report
  - Works have been focused on preparation for damper installations following the last meeting
  - RF cage ceiling to be completed once ductwork is fitted
  - Cable containment being completed later this week following RF cage ceiling
  - Chiller being commissioned this week

- Pre-delivery inspection date/time confirmed
- Access to decorate Control Room being managed locally
- Site hoardings and temporary screens working well in shared MR Control room
- Instruction given to provide new vinyl flooring to the Control Room
- MR lead radiographer to confirm changes to Control Room furniture
  
- Contractor's Queries and/or Requests for Information
- Nothing further to report.
- Manufacturer
  - Magnet is in storage, collection date confirmed
- Employer's Matters
  - Site inspections to be made prior to closing ceilings
  - Damper demonstrations to be provided
  - Scanner delivery date confirmed
  - CDM Regulations
  - No incidents to report
- Any Other Business
  - None to report

### **RF Cage Attenuation Tests**

Pre and post MR scanner delivery RF cage attenuation tests and RF cage installation and completion report issued. Outside (RF cage) reference levels were taken, and the RF cage was tested at frequencies of 15, 63 and 128 MHz at the MR Examination room door, MR Control room window and penetration panel. All attenuation measurements were within the manufacturer specifications.

## **Month 7**

### **MR physics Commissioning/Acceptance Testing**

With installation complete commissioning /acceptance testing was performed by the MR physics team. An overlap with the installation engineer is always useful to receive copies of their test results (magnet shim, manufacturer quality assurance (QA) checks, coil (QA), test tools report, tune up) and general manufacturer scanner information for future reference. No issues reported.

## **8.2 Example 2 – new MRI installation**

This Fly on the Wall account was for a new installation which was intended to be a new build (new MRI and CT scanner) housed in an extension to a community hospital.

### **What went well?**

- Despite MR physics not being invited to project meetings or cc'd in emails there was good communication between the MRI Radiology/MRI radiographer teams to ensure MR physics were informed and involved.
- Acceptance testing went smoothly.

## What did not go so well?

- The community hospital was a listed building and there were tight regulations/specifications for extending the building which weren't compatible with what would make a functioning MR/CT unit.
- The new MR/CT units were eventually installed in a relocatable pod while the planning for the extension to the listed building continued.
- Project meetings didn't include all staff groups as recommended in the MHRA guidelines to facilitate a smooth installation.
- There was poor communication between project management, MR physics, MRI radiographers and Radiology/Imaging throughout the project.
- Unforeseen potential vibration issues for the pod which required investigating.
- Unforeseen noise pollution measurements due to pod location next to Care Home.
- Retrospective design issues included:
  - No room for a trolley in the MR pod apart from in the MR Examination room.
  - Poor patient evacuation route, with the need to open a gate to get a trolley out into a car park.
  - Use of semi-private changing area as preparation/cannulation room for patients requiring contrast so only 1 patient in at a time despite having 2 cubicles.
  - No sink in the changing/preparation area, so staff need to walk past staff in the MR Control room to use the sink for hand washing.
  - No room around the sink for mounting soap dispensers/towels, these were located on a wall to the side.
  - The fire panel was in the MR Technical room and would have been better in the MR Control room for accessibility.
  - Two MR Examination room doors into the MR Examination room; the one from MR Technical room was unnecessary as there was external access to the MR Technical room.
- MR physics acceptance testing scheduling issues included:
  - Lack of communication over acceptance testing dates.
  - Access to the MRI pod required an engineer to come on site.
  - Confusion from project team over acceptance testing involving patient scans and the reception and waiting areas not being finished.

## Learning Outcomes

- Assess feasibility of local options for new installations well in advance to avoid delays and increased costs (2.1).
- Include people with specialist knowledge on the design team to ensure adequate space requirements, staff facilities and good functional workflow (3.3).

## Timeline of events

Initial plans to replace the current mobile MR scanner with a purpose-built MRI/CT were forwarded to MR physics for comment.

Many issues followed with the design and planning permission for the new build as the hospital concerned was a listed building.



## One year later

Initial designs for permanent building were shared with MR physics. Trust MR Lead requested information on any national guidelines and supporting documentation about proposed plans for the design.

## Two years later

A decision was made to house the MR and CT in a temporary structure while planning permission and issues over the extension to the listed building (current community hospital) were resolved.

### Month 1

- Two possible locations for the relocatable MR scanner were sent to MR physics for review, particularly with reference to the position of high voltage cables from an electrical substation at the back of the preferred carpark.
- E-mails from the manufacturer to the Trust MR Lead outlined details of the on-site applications training, with the specifics of training to be finalised once the actual dates were released by project management.

### Month 2

- MR physics were sent the plans for the “temporary” structure which would house the MR scanner until it could be moved into its permanent location.
- The project manager and manufacturer had received concerns from the adjacent property (a care home) about noise from the scanner during operation while in its temporary structure.
- MR physics measured the noise outside another similar pod already installed at another local Trust to estimate potential noise pollution.

### Month 3

The project management team issued the foundation drawings for review and comment to Radiology Manager and Trust MR Lead. There were recommendations for a trial pit to confirm ground conditions which required management of disruption to existing car park and list of key issues that needed clarifying:

1. Scope – exactly who is doing what, what pre-work do the Trust need to complete before the install occurs.
2. Logistics – Site set up areas, crane lift areas and lift plans, sequence, etc.
3. H&S – Method statements – what do the Trust need to see, who is the principal installation contractor and is there one or more than one, etc.
4. Programme – we need to firm up the attached.

The Trust MR Lead sent round questions following a project meeting (which didn't involve MR physics) about additional fixtures, quotes for injectors, [MR Conditional](#) equipment (e.g. trolley/chair), [MR Conditional](#) fire extinguisher. Queries were raised over scanner noise for the pod. Dates for applications specialist training were still to be arranged.

MR radiographer's questions/comments:

1. No need for an [MR Conditional](#) trolley, but a [MR Conditional](#) wheelchair, whilst not essential, would most definitely aid with flow and ensure a swift turnover between patients.
2. Assume that there is sufficient space to manoeuvre a patient on a trolley, from the reception area, past the toilet doors, and turning 90 degrees to enter the MR prep area?
3. Coil cupboard is desirable
4. A wall mounted pump loading system, outside of the scan room will aid flow.
5. Lockable drugs cabinet required.
6. A crash trolley shared with CT in reception area

7. Patient hoist available?
8. Sluice/macerator shared with CT?
9. PC and Landline essential

#### **Month 4**

Exploratory excavations were planned at the site of the permanent extension (with a JCB) which was near to the current location of a mobile MR scanner. MR physics were concerned about level of vibration and recommended avoiding scanning on the day the closest hole was being dug.

#### **Month 5**

The applications specialist e-mailed the Trust MR Lead with potential dates of the following month for applications training however there was no access to the scanner for clinical MRI scans before the month due to on-going building work to install a reception pod with walkways and in the adjacent CT scanner.

Revised schedule for the installation was issued with suggested dates for Medical Physics acceptance testing for early April. No Physics involvement in project meetings.

#### **Month 6**

- MR physics e-mailed the project management team about the expected schedule for the MRI installation as the Physics acceptance was originally planned for that week but there had been no confirmation this was going ahead.
- MR physics were informed that manufacturer commissioning had been completed and the MR scanner was ready for acceptance testing, but an engineer was needed on site as they had the keys to the unit.
- More e-mail correspondence followed with project management stating that reception hasn't been finished and wasn't ready for patients so MR physics couldn't do the acceptance testing. There would be an issue getting engineers on site to give MR physics access, so Physics acceptance was booked for mid-April once we explained that no patients were being scanned during acceptance testing.

#### **MR physics Acceptance Testing**

The acceptance testing went smoothly on the day, the images analysed, and acceptance report generated. The MR Local Rules were updated to include the replacement scanner.

MR physics requested the following:

- A copy of the cage certificate
- Information on what ventilation measures were in place in case of a Helium leak inside the MR Examination room as there didn't appear to be an emergency extraction system hooked into the O2 monitor
- Information on handover arrangements
- Dates for applications specialist training as MR physics wanted to attend.

## 9 References

- ACR manual on MR safety (2026), <https://www.acr.org/Clinical-Resources/Clinical-Tools-and-Reference/radiology-safety/mr-safety>
- Anwar et al (2022) Paediatric magnetic resonance imaging adaptations without the use of sedation or anaesthesia: A narrative review. *J Med Imaging Radiat Sci*;53(3):505-514. doi: 10.1016/j.jmir.2022.04.048.
- ASTM F2503-26 (2026) Standard Practice for Marking Medical Devices and Other Items for Safety in the Magnetic Resonance Environment.
- AXREM General Equipment (Non X-Ray) Handover Form (2026), <https://www.axrem.org.uk/resource/general-equipment-handover-form/>
- AXREM Emergency Button Signs for Permanently Installed Medical Equipment (2026b). <https://www.axrem.org.uk/resource/axrem-emergency-stop-button-label-recommendations/>
- BBC (2025) “Hospital says toy MR scanner helps save £150k”, <https://www.bbc.co.uk/news/articles/c24rlyprqq4o>
- BIR Risk Assessments for MRI, <https://www.bir.org.uk/get-involved/special-interest-groups/bir-magnetic-resonance/mr-safety-risk-assessments.aspx>
- BS 5266-1 (2025) Emergency lighting - Emergency lighting of premises. Code of practice
- Calamante et al (2016) Recommended responsibilities for management of MR safety. *J Magn Reson Imaging*. 44(5):1067-1069. doi: 10.1002/jmri.25282.
- Carter et al (2010) Mock MRI: reducing the need for anaesthesia in children. *Pediatr Radiol*. 40(8):1368-74. doi: 10.1007/s00247-010-1554-5.
- CIBSE (2019) LG02 Lighting for healthcare premises, <https://www.cibse.org/knowledge-research/knowledge-portal/lighting-guide-02-lighting-for-healthcare-premises-2019/>
- CEMFAW (2016), The Control of Electromagnetic Fields at Work Regulations, <https://www.legislation.gov.uk/ukxi/2016/588/contents/made>
- College of Radiographers & Royal College of Radiologists (2024) Quality Standard for Imaging. <https://www.collegeofradiographers.ac.uk/about-the-college/qs/>
- Harrington et al (2022) Strategies to perform magnetic resonance imaging in infants and young children without sedation. *Pediatr Radiol* 52, 374–381 (2022). doi: 10.1007/s00247-021-05062-3
- Heales and Lloyd (2022) Play simulation for children in magnetic resonance imaging. *J Med Imaging Radiat Sci* ;53(1):10-16. doi: 10.1016/j.jmir.2021.10.003. Epub 2021 Nov 24.
- Health Building Note 00-01. General design guidance for healthcare buildings. NHS England (2014). <https://www.england.nhs.uk/publication/designing-health-and-community-care-buildings-hbn-00-01/>
- Health Building Note 06-01. Facilities for diagnostic imaging and interventional radiology. In preparation
- Health Technical Memorandum 00: Policies and principles of healthcare engineering. NHS England (2014). <https://www.england.nhs.uk/publication/building-engineering-in-the-health-sector-htm-00/>
- Health Technical Memorandum 02-01: Medical gas pipeline systems Part A: Design, installation, validation and verification. NHS England (2026). <https://www.england.nhs.uk/publication/health-technical-memorandum-02-01-medical-gas-pipeline-systems/>
- Health Technical Memorandum 03-01: Specialised ventilation for healthcare premises. NHS England (2021). <https://www.england.nhs.uk/publication/specialised-ventilation-for-healthcare-buildings/>

- Health Technical Memorandum 05-01: Managing Healthcare Fire Safety (2026)  
<https://www.england.nhs.uk/publication/managing-healthcare-fire-safety-hm-05-01/>
- Health Technical Memorandum 05-02: Firecode – Guidance in support of functional provisions (Fire safety in the design of healthcare premises) (2024)  
<https://www.england.nhs.uk/publication/fire-safety-in-the-design-of-healthcare-premises-hm-05-02/>
- Health Technical Memorandum 05-03: Firecode – Fire Safety in the NHS – Operational provisions (2024) <https://www.england.nhs.uk/publication/fire-safety-in-the-nhs-health-technical-memorandum-05-03/>
- Health Technical Memorandum 06-01: Electrical services supply and distribution. NHS England (2017) <https://www.england.nhs.uk/publication/electrical-services-supply-and-distribution-hm-06-01/>
- Health Technical Memorandum 08-01: Acoustics. NHS England (2013)  
<https://www.england.nhs.uk/publication/health-sector-buildings-acoustic-design-requirements-hm-08-01/>
- IEC 60601-1:2005+AMD1:2012+AMD2:2020 Medical electrical equipment - Part 1: General requirements for basic safety and essential performance.
- IEC 60601-1-2:2014 Medical electrical equipment - Part 1-2: General requirements for basic safety and essential performance - Collateral Standard: Electromagnetic disturbances - Requirements and tests
- IEC 60601-2-33:2022 Medical electrical equipment - Part 2-33: Particular requirements for the basic safety and essential performance of magnetic resonance equipment for medical diagnosis. Reproduced as BS EN ISO 60601-2-33:2024
- IPEM MR safety signage (2017), <https://www.ipem.ac.uk/resources/mri/mri-safety-notice-magnetic-resonance-imaging/>
- IPEM Report 112: Quality Control and Artefacts in MRI. IPEM (2017)
- MHRA Managing medical devices (2021). <https://www.gov.uk/government/publications/managing-medical-devices>
- MHRA Safety guidelines for MRI equipment in clinical use (2026).  
<https://www.gov.uk/government/publications/safety-guidelines-for-magnetic-resonance-imaging-equipment-in-clinical-use>
- MHRA Yellow card scheme. <https://yellowcard.mhra.gov.uk/>
- Moelker A et al (2003). Efficacy of passive acoustic screening: implications for the design of imager and MR-suite. JMRI Feb;17(2):270-5. doi: 10.1002/jmri.10251.
- Mullally S (2013) A toolkit for medical equipment donations to low-resource settings: making It work. Global Health Partnerships.  
<https://www.globalhealthpartnerships.org/resources/making-work-toolkit-medical-equipment-donations/>
- NHS England (2023) Processes for managing and reporting derogations from estates technical standards and guidance. <https://www.england.nhs.uk/publication/processes-for-managing-and-reporting-derogations-from-estates-technical-standards-and-guidance/>
- NHS Supply chain (2025) [https://www.supplychain.nhs.uk/product-information/contract-launch-brief/magnetic-resonance-imaging-scanners-and-associated-option-and-related-services/?utm\\_source=magnetic-resonance-imaging-scanners-and-associated-option-and-related-services](https://www.supplychain.nhs.uk/product-information/contract-launch-brief/magnetic-resonance-imaging-scanners-and-associated-option-and-related-services/?utm_source=magnetic-resonance-imaging-scanners-and-associated-option-and-related-services)
- Recht P et al (2019), Optimization of MRI Turnaround Times Through the Use of Dockable Tables and Innovative Architectural Design Strategies. AJR Am J Roentgenol. Apr;212(4):855-858. doi: 10.2214/AJR.18.20459

- Patients Association (2024), <https://www.patients-association.org.uk/blog/how-can-patient-experience-of-diagnostic-services-be-improved>
- PSSR (2000), <https://www.legislation.gov.uk/ukxi/2000/128/contents/made>
- Quality Standard for Imaging (2026), <https://www.rcr.ac.uk/our-services/management-service-delivery/quality-standard-for-imaging-qs/>
- RIBA (2020) Plan of work. <https://www.architecture.com/knowledge-and-resources/resources-landing-page/riba-plan-of-work>
- Small et al (2026) MRI faraday cage performance during the lifetime of clinical MR systems. MAGMA doi: 10.1007/s10334-025-01321-8
- Society of Radiographers & British Association of Magnetic Resonance Radiographers (2019) Safety in Magnetic Resonance. <https://www.sor.org/learning-advice/professional-body-guidance-and-publications/documents-and-publications/policy-guidance-document-library/safety-in-magnetic-resonance-imaging>
- Society of Radiographers. Various guidance associated with MRI, <https://www.sor.org/Learning-advice/Professional-body-guidance-and-publications/Documents-and-publications/Policy-Guidance-Documents-Library?searchTerm=mri>
- Steckner et al (2024) Transitioning from 0.5 to 0.9 mT: Protecting against inadvertent activation of magnet mode in active implants. Magn Reson Med. 2024 Nov;92(5):2237-2245. doi: 10.1002/mrm.30153.
- Steckner (2025) A Review of MRI Acoustic Noise Outputs and Hearing Protection Device Performance. J Magn Reson Imaging. 61(5):2083-2093. doi: 10.1002/jmri.29665.
- Steckner et al (2026) Commentary: The MR scanner room door is a latent safety issue. MAGMA. doi: 10.1007/s10334-025-01310-x
- Stunden et al (2021) Comparing a Virtual Reality-Based Simulation App (VR-MRI) With a Standard Preparatory Manual and Child Life Program for Improving Success and Reducing Anxiety During Pediatric Medical Imaging: Randomized Clinical Trial. J Med Internet Res 23(9):e22942. doi: 10.2196/22942.
- UK Health Security Agency (2024) National coding taxonomy for incident learning in clinical imaging, MRI and nuclear medicine. <https://www.gov.uk/government/publications/national-coding-taxonomy-for-incident-learning-in-clinical-imaging-mri-and-nuclear-medicine>
- US Department of Veterans Affairs Imaging Services Design Guide (2026). <https://vatilms.va.gov/vatilms/reports/PG-18-12>
- Wilson et al (2019) Guidelines for the safe provision of anaesthesia in magnetic resonance units 2019: Guidelines from the Association of Anaesthetists and the Neuro Anaesthesia and Critical Care Society of Great Britain and Ireland. Anaesthesia 74(5):638-650. doi: 10.1111/anae.14578.